


CAT8

Category 8, ISO Class 1 with a bandwidth of 2000 MHz, can be used for 100 Mbps, 1000 Mbps, 10 Gigabit and for 40 Gigabit Ethernet networks up to a maximum length of 30 meters.



S/FTP

Twisted pair cable with foil shielding for each wire pair plus additional braided shielding wrapped around all pairs.

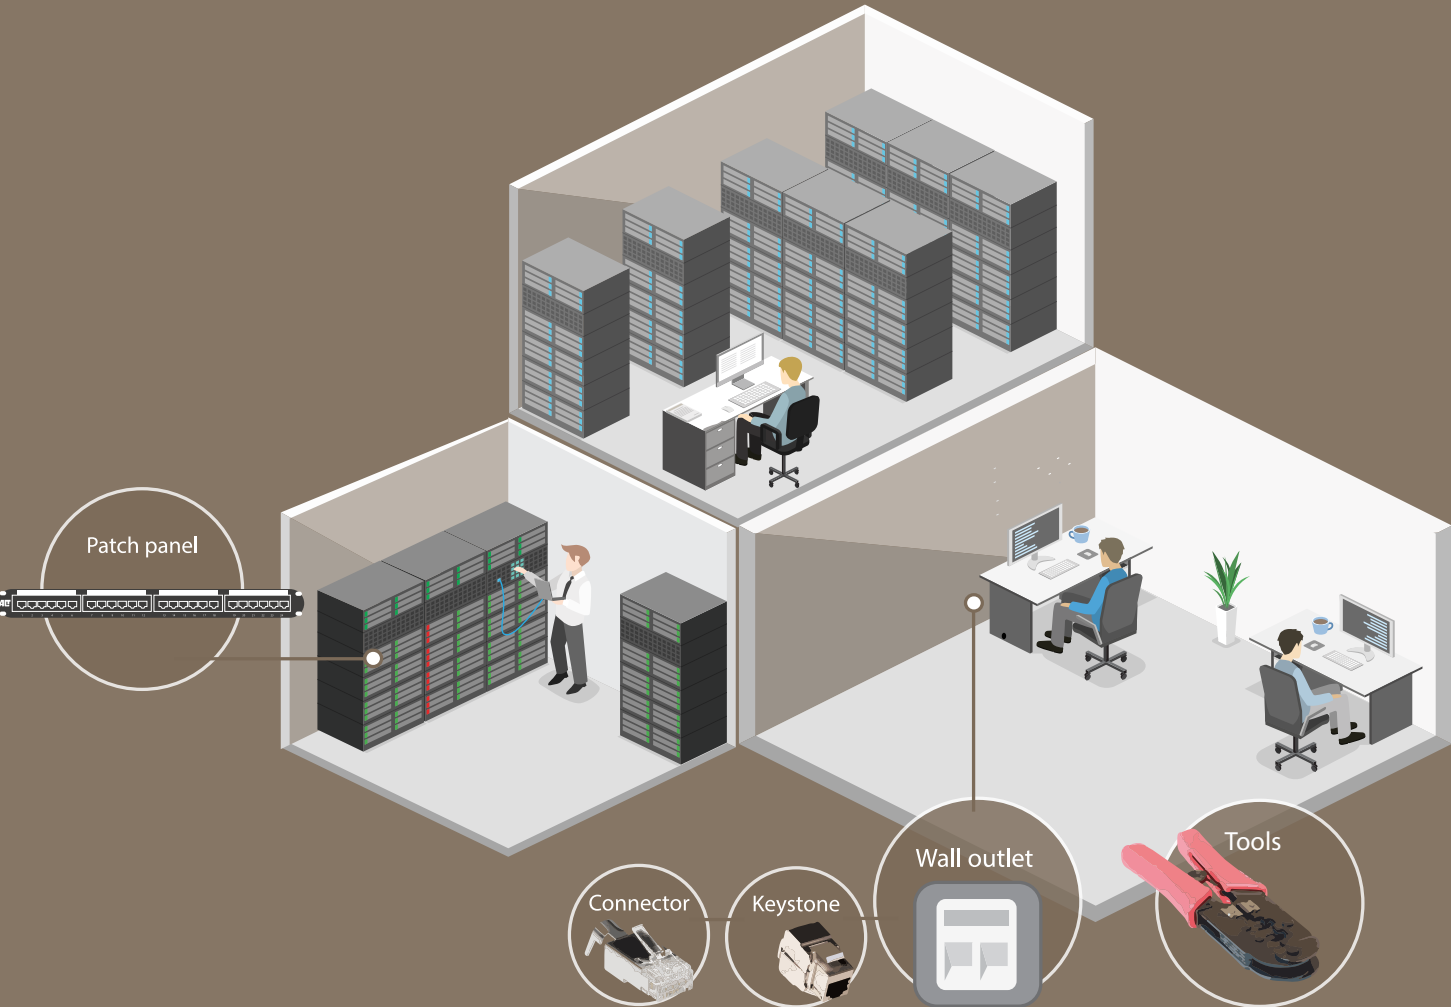

CAT8 S/FTP LSZH patch cable, AWG24 CU, 50µ gold-plated contacts					
Colour	1m	1.5m	2m	3m	5m
Yellow	FB8001	FB8051	FB8002	FB8003	FB8005



Keystone CAT8			
Description	Cable mounting	Colour	Type no.
Shielded toolfree	Back	Full metal	TD8511
ACT keystones are compatible with all ACT connecting hardware			

Patch panel CAT8			
Description	Ports	Application	Type no.
Keystone panel	24 ports	Suitable for mounting keystones	PP1030



Tools		
Description	Application	Type no.
LSA Tool	Dogging tool for LSA contacts	64172K
Stripper	Stripper for data contacts	FHT501
110 block punchtool	Dogging tool for 110 block	TD060

