


VE810

HDMI Extender with IR Control

- The VE810 HDMI Extender extends your HDMI display up to 60 m from your HDMI source device using two Cat 5e cables. In addition, VE810 is equipped with IR signaling pass-through which allows the IR channel to control from the remote to local unit, to control the HDMI source, or from the local to remote unit, to control the display device.

For flexibility and convenience, the VE810 setup requires only one power adapter for both units. The VE810R remote unit will function without the need of an additional power adapter because it will be powered by the VE810 local unit.

HDMI™
HIGH DEFINITION MULTIMEDIA INTERFACE

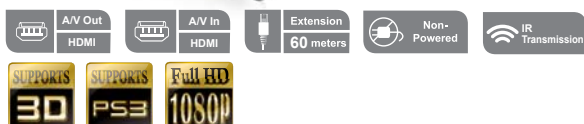


Features

- Uses less expensive Cat 5e cables to connect the local and the remote units
- Supports IR signals for remote control
- Either the HDMI device or display can be controlled via IR control
- 8 segment equalization adjustment switch optimizes display quality
- Extend 1080p by 40 m; extend 1080i (HDTV) by 60 m
- Superior video quality – 1920 x 1200 @ 60Hz , up to 1080p
- Supports Dolby True HD and DTS HD Master Audio
- HDMI (3D, Deep Color)
- DDC compatible
- HDMI and HDCP 1.1 compatible
- Compatible with all ATEN HDMI switches and splitters
- Non-Powered (only require one power adapter)


Connect the IR Transmitter at the local unit and IR Receiver at the Remote unit to control the HDMI Device.

Application 1 Remote Control of your HDMI Device

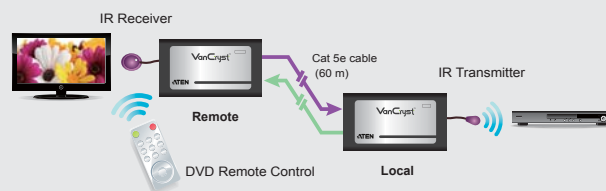

Connect the IR Receiver at the local unit and IR Transmitter at the Remote unit to control the HDMI Display.

Application 2 Remote Control of your HDMI Display

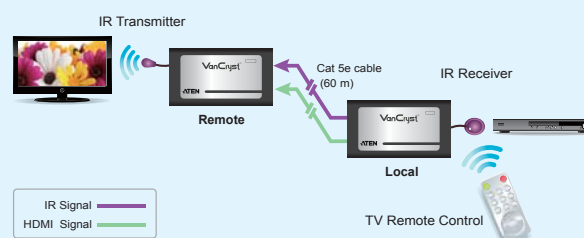

Specification

Function			VE810L	VE810R
Device Connections			1	N/A
Connectors	Display	HDMI Out	N/A	1 x HDMI Type A Female (Black)
	Device	HDMI In	1 x HDMI Type A Female (Black)	N/A
	Power Jack		1 x DC Jack	
	Unit to Unit		2 x RJ-45 Female	
IR			1 x 3.5 mm phone jack	
Switches	EQ Switch		N/A	1 x 8-position switch
LEDs	Power		Green	
	On Line		N/A	Green
HDMI Resolution			HDTV resolutions: 480p, 720p, 1080i. 1080p (1920 x 1080); PC resolutions: VGA, SVGA, XGA, SXGA, UXGA, WUXGA (1920 x 1200)	
Power Consumption			DC5V, 1.52 W	DC5V, 1.35W
Transmission Distance			Up to 60 m at 1080i	
Environment	Operation Temp.		0°–50°C	
	Storage Temp.		–20°–60°C	
Humidity			0–80% RH, Non-condensing	
Physical Properties	Housing		Metal	
	Weight		154 g	154 g
	Dimension		9.00 x 5.76 x 2.40 cm	9.00 x 5.76 x 2.40 cm

* Product specifications and appearance are subject to change without notice.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com

Printed 06/2014 V3.0



© Copyright 2014 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.