

HDMI HDBaseT™ Extender with Dual Output

VE814A

ATEN VE814A is an HDBaseT Video Extender that is capable of sending HDMI signals up to 100 m over a single Cat 5e / 6 / 6a or ATEN 2L-2910 Cat 6 cable. Featuring dual synchronous outputs, the VE814A can transmit video signal to two remote displays and one at the local side. This HDCP 2.2-compliant extender meets the HDMI specifications, including 3D, Deep Color, the maximum data rate of 10.2 Gbps, and 4K video quality up to 100 m.

The VE814A supports RS-232 and IR signaling pass-through, allowing users to control the HDMI source device from the remote unit (VE814AR) while granting access to the HDMI display device from the local unit (VE814AT). In addition, it supports Long Reach Mode that extends 1080p HDMI signals up to 150 m via a single Cat 5e / 6 cable.

The VE814A is a powerful solution for digital signage applications, such as bars, educational spaces, and public transportation stations, allowing display of identical contents at different spots.



VE814A-AT



VE814A-ATA

Front View



* VE814A-AT supports Ethernet function, and VE814A-ATA does not.


Rear View



Features

- Extends HDMI signals to one local and two remote displays up to 100 m over a single Cat 5e/6/6a or ATEN 2L-2910 Cat 6 cable
- HDMI (3D, Deep Color, 4K); HDCP 2.2 compatible
- Superior video quality:
 - 4K up to 100 m
 - 1080p up to 150 m when in HDBaseT Long Reach Mode
- Extends Ethernet communication using the Ethernet pass-through port*
- Supports two IR channels for simultaneous IR signal transmissions, ranged from 30 KHz to 56 KHz
- ATEN EDID Technology – when both transmitter and receiver sides are connected, VE814A adopts the EDID values of the display connected to the VE814AT for high-quality output
- RS-232 channel – allows users to connect to serial terminals or serial devices, such as touch screens and barcode scanners
- Supports wide screen format
- Built-in 8 kV/15 kV ESD protection
- Plug-and-play
- Rack-mountable

Note: The function is supported by VE814A-AT only.

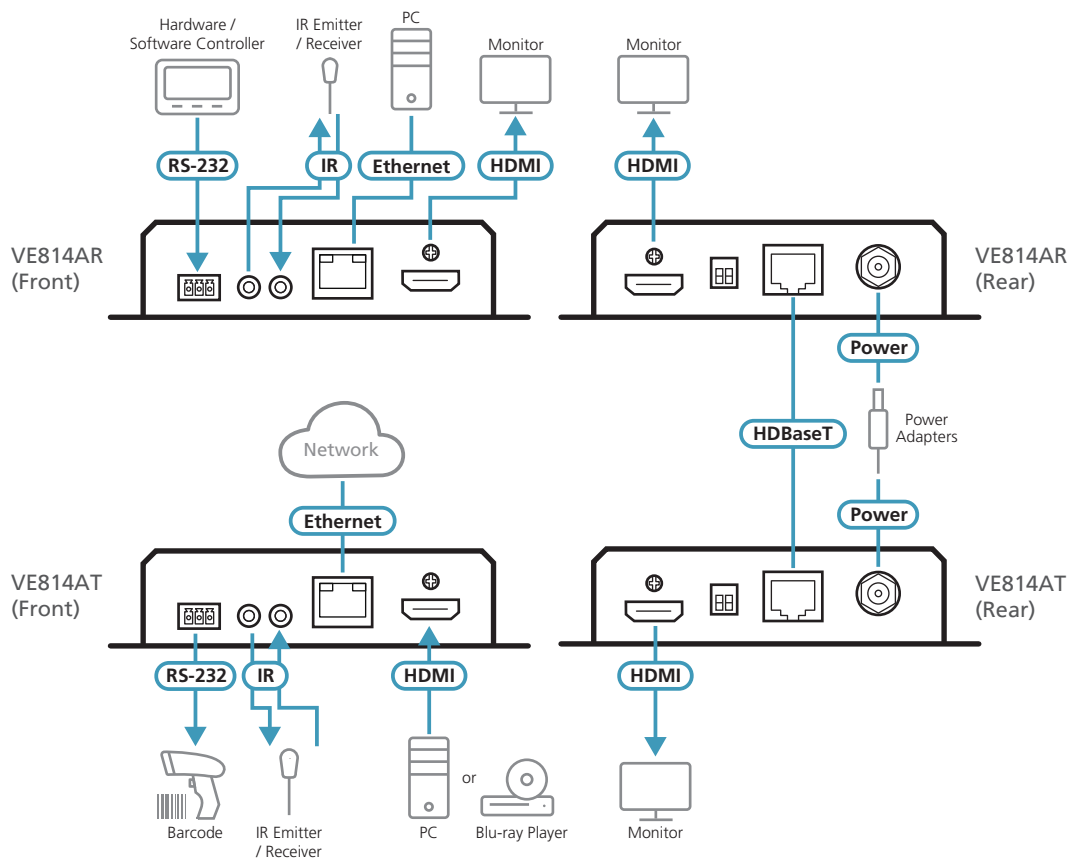

* The Ethernet port is functional for device supporting the Ethernet port only.

Specifications

	VE814AR	VE814AT
Video Input		
Interfaces	N/A	1 x HDMI Type A Female (Black)
Impedance	N/A	100 Ω
Max. Distance	N/A	3 m
Video Output		
Interfaces	2 x HDMI Type A Female (Black)	1 x HDMI Type A Female (Black)
Impedance	100 Ω	100 Ω
Max. Distance	3 m	3 m
Video		
Max. Data Rate	10.2Gbps (3.4Gbps per lane)	
Max. Pixel Clock	340 MHz	
Compliance	HDMI (3D, Deep Color, 4K); HDCP Compatible Consumer Electronics Control (CEC)	
Max. Resolutions / Distance	Up to 4K @ 70 m (Cat 5e / 6) / 100 m (Cat 6a / ATEN 2L-2910 Cat6); 1080p @ 100 m (Cat 5e / 6 / 6a) *4K supported: 4096 x 2160 / 3840 x 2160 @ 60 Hz (4 : 2 : 0); 4096 x 2160 / 3840 x 2160 @ 30 Hz (4 : 4 : 4)	
Audio		
Input	N/A	1 x HDMI Type A Female (Black)
Output	2 x HDMI Type A Female (Black)	1 x HDMI Type A Female (Black)
Connectors		
Unit To Unit	1 x RJ-45 Female	1 x RJ-45 Female
Power	1 x DC Jack (Black) with locking	1 x DC Jack (Black) with locking
Control		
RS-232	Connector: 1 x Terminal Block, 3 pole; Baud Rate: 57600 bps, Data Bits:8, Stop Bits:1, no parity and flow control	
IR	2 x Mini Stereo Jack Female (Black)	2 x Mini Stereo Jack Female (Black)
Ethernet	1 x RJ-45 Female Note: The RJ-45 ports is functional for device supporting the Ethernet port only	1 x RJ-45 Female Note: The RJ-45 ports is functional for device supporting the Ethernet port only
Switches		
Long Reach Mode Switch	1 x Slide Switch - ON/OFF	1 x Slide Switch - ON/OFF
Firmware Upgrade	1 x Slide Switch - ON/OFF	1 x Slide Switch - ON/OFF
Power Consumption	DC 5V, 7.9W	DC 5V, 5.1W
Environmental		
Operating Temperature	0 to 40 °C	0 to 40 °C
Storage Temperature	-20 to 60 °C	-20 to 60 °C
Humidity	0 - 80% RH, Non-Condensing	0 - 80% RH, Non-Condensing
Physical Properties		
Housing	Metal	Metal
Weight	0.47 kg	0.45 kg
Dimensions (L x W x H) with bracket	14.04 x 12.30 x 3.00 cm	14.04 x 12.30 x 3.00 cm
Dimensions (L x W x H) without bracket	13.60 x 10.10 x 2.90 cm	13.60 x 10.10 x 2.90 cm

Note: 1. ATEN 2L-2910 Cat 6 cable is highly recommended for the best product performance.
2. VE814A-AT supports Ethernet function, and VE814A-ATA does not.

Product information is subject to change without prior notice.

ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com

Released: 08/2022 V5.0

© Copyright 2022 ATEN® International Co. Ltd.
ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.
The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

