




Delock PCI Express Card > 1 x 10 Gigabit LAN SFP+

Description

The Delock PCI Express network card provides a connection for an SFP+ module with a transfer rate of 10 Gbps. The SFP slot accepts an optional 10 Gigabit SFP+ module to connect a PC via a fiber optic cable to the network.

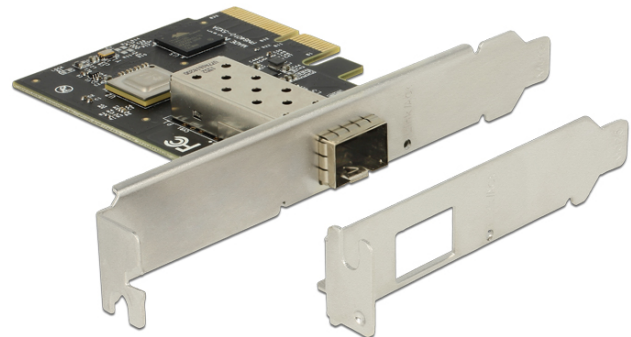

Specification

- Connector:
external: 1 x SFP Slot for a 10 Gigabit SFP+ module (not included)
internal: 1 x PCI Express x4, V2.0
- Chipset: Tehuti TN4010
- Data transfer rate:
10 Gigabit Ethernet up to 10 Gbps
PCI Express x4 up to 20 Gbps
- Supports IEEE 802.3az (EEE)
- Supports 16k Jumbo frames
- Supports IEEE 802.1Q Virtual LAN (VLAN)
- Supports IEEE 802.3ad Link Aggregation

System requirements

- Windows Server-2008 R2/Server-2012/Server-2012 R2/
7/7-64/8.1-64/10/10-64, Linux Kernel 2.6.24
- PC with one free PCI Express x4 / x8 / x16 / x32 slot
- SFP+ module with 10 Gbps

Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

Item No. 89475

EAN: 4043619894758

Country of origin: China

Package: White Box



Images





General

Supported operating system:	Linux Kernel 2.6.24
	Windows Server 2008 R2
	Windows Server 2012
	Windows Server 2012 R2
	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8 32-bit
	Windows 8 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit

Interface

External:	1 x 10 Gigabit LAN SFP+ Slot
Internal:	1 x PCI Express x4, V2.0

Technical characteristics

Chipset:	Tehuti TN4010
Data transfer rate:	10 Gigabit Ethernet up to 10 Gbps

Physical characteristics

Slot bracket:	low profile
	standard