



## Bullets

- HDMI receiver for use with AC7850
- Connect up to 12 receivers for use with AC7850
- IR receiver unit
- Maximum resolution 1080p @ 60Hz
- Integrated mounting bracket
- Extend your HDMI signal via your home IP network

## Technical specs

Stream rate	: 90Mbps
Compression	: MJPEG
UTP Port	: 100 Mbit
Maximum receivers supported for use with AC7850	: 12
Supported resolutions 50/60hz compatible	: 480P/720P/1080i/1080P
IR support	: IR-RX ( receiver )
IR-RX cable length	: 110cm
Supported Audio	: 2CH Stereo
HDMI standard	: HDMI High Speed
Power consumption	: 3W
Power supply	: 5V 1A
Dimensions in mm. (WxHxD)	: 92x20x79
Weight in grams	: 230g

## Story

The AC7851 HDMI over IP Receiver must be used in combination with the AC7850 HDMI over IP Extender - set. HDMI over IP allows you to extend an HDMI signal via your home IP network with a maximum resolution of 1080p @ 60Hz. The AC7851 Receiver has an integrated mounting bracket and comes with an IR receiver for remote controlling your connected A/V device.



**Full HD**

1920 x 1080  
@ 60Hz

**HDMI**


High Speed  
1080p

**IR**

Transmitter /  
Receiver  
38kHz - 56kHz

### Point-to-Multipoint (over IP)

For example: Media Player,  
BluRay Player, DVD Player

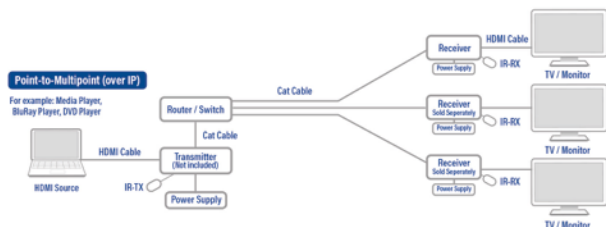

SKU	EAN	SHORT PRINT DESCRIPTION
AC7851	8716065403558	Receiver unit for AC7850