


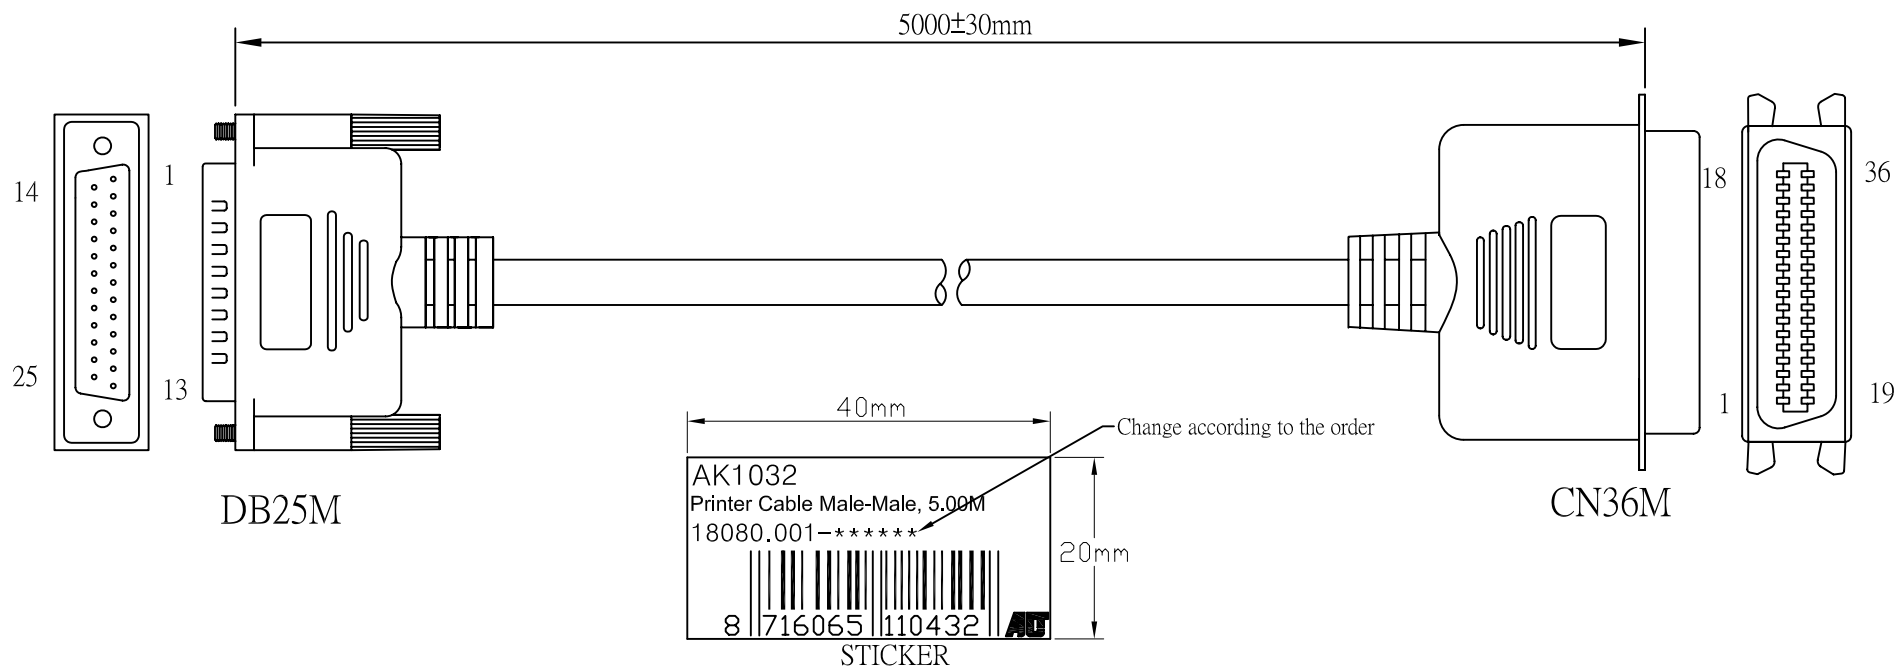

NOTE:

1. CABLE:30AWG,NON-UL,AL-FOIL,25C+1,BEIGE COLOR,,OD=7.0mm,PVC JACKET.
2. LENGTH: 5000mm
3. CONNECTOR:DB25M*1,CN36M*1 (BLACK INSULATOR)
4. MOLD: APPLE MOLDING
5. SCREW:4*40 ,INCH SCREW*2,BEIGE.


6. CONTACTS:

DB25M	1...4...14	15	16	17	18	19	20	21	22	23	24	25	64
CN36M	1...4...14	32	31	36	33	19	21	23	25	27	29	30	64

7. OPEN/SHORT TEST: 100% TEST.

INSULATION: MIN. 1M.

RoHS Compliant

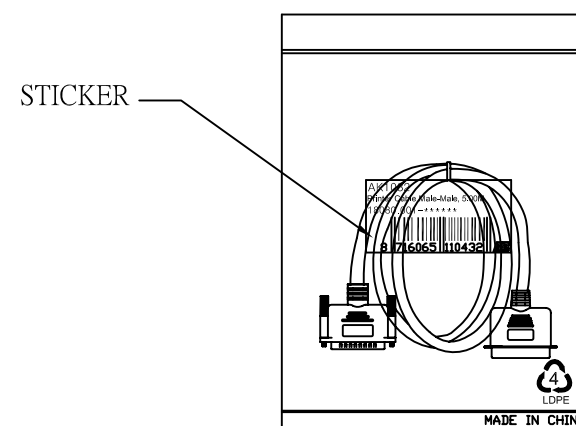

1PCS/PE BAG(0.06*190*300mm)+STICKER

Company	I.B.V	Goods Code		Draw	FC001 WJF	Date	2009.10.13		D		
ITEM NO.	AK 1032	Drawing Evidence		Check		Date			C		
Goods NO.				Approval		Date			B	Adding Packaging Info.	10.04.02ZXW
Original NO.	S-*****	Unit(mm)							VER. A	REVISE	Date