


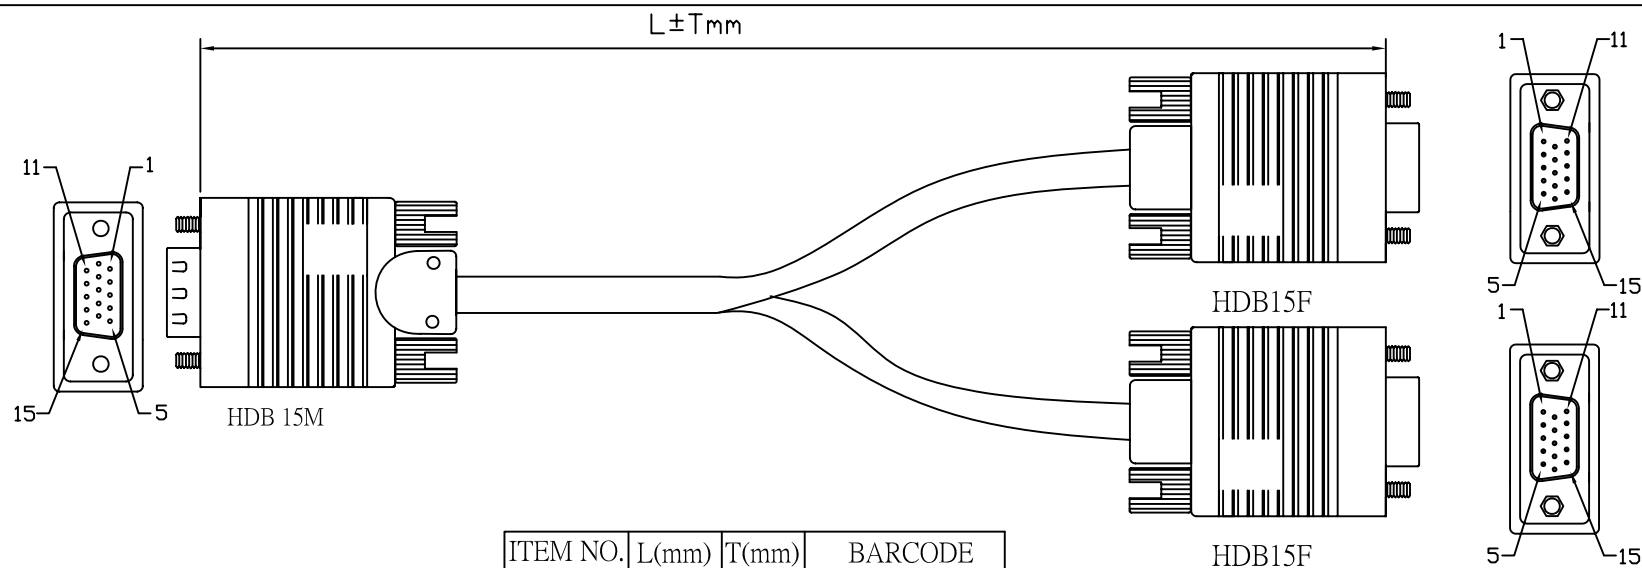

ITEM NO.	L(mm)	T(mm)	BARCODE
AK3187	250	20	8716065111705
AK3188	1800	30	8716065111712


NOTE:

1. CABLE: UL2919,28AWG*3COAX+28AWG*9C,OD=8.5mm,BLACK COLOR,PVC JACKET.
2. LENGTH:L
3. CONNECTORS: HDB 15M*1PCS,HDB15F*2PCS.(BLUE INSULATOR)
4. SCREW:HDB15M*R39.6*2PCS/HDB15F*R37.7*4PCS
5. CONTACTS:

HDB15M	1	2	3	6	7	8	4	5	9	10	11	12	13	14	15	64
HDB15F	1	2	3	6	7	8	4	5	9	10	11	12	13	14	15	64
HDB15F	1	2	3	6	7	8	4	5	9	10	11	12	13	14	15	64
	RC	GC	BC	RS	GS	BS										

6. MOLD:BLACK COLOR.

7. OPEN/SHORT TEST: 100% TEST.
INSULATIONS: 5M.

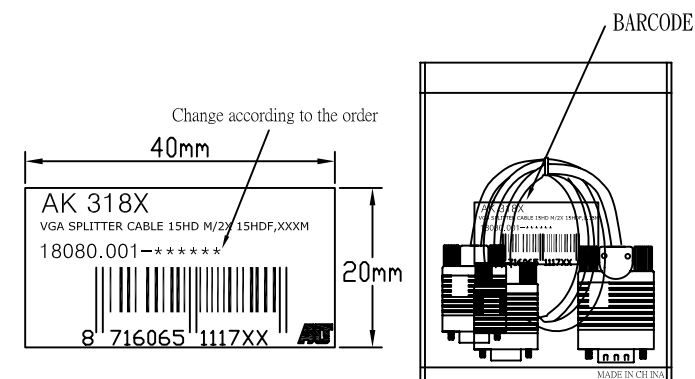

ROHS COMPLIANT

1PCS/PE BAG(0.06*190*300)+BARCODE

Company	I.B.V	Goods Code		Draw	FC001 JACK	Date	2011.07.05
ITEM NO.	AK318X	Drawing Evidence:		Check		Date	
Goods NO.				Approval		Date	
Original NO.	V-2711032	Unit(mm)					

AC

D		
C		
B	REVISED THE WORD"according"	10.03.12WJF
VER. A	REVISE	Date