



RoHS

REV.	DESCRIPTION	DATE
A	AK3822	2015-09-23
B		

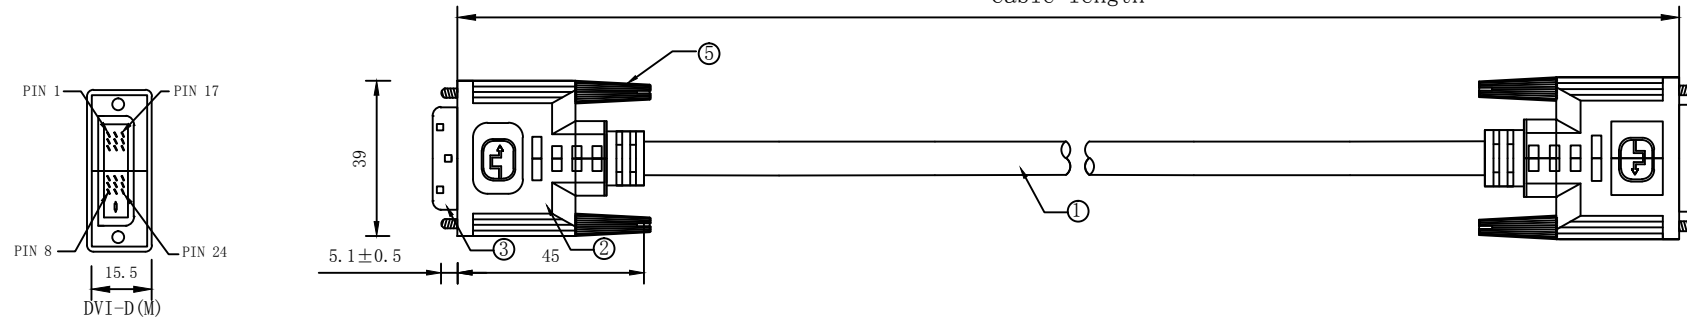

Cable Specifications:

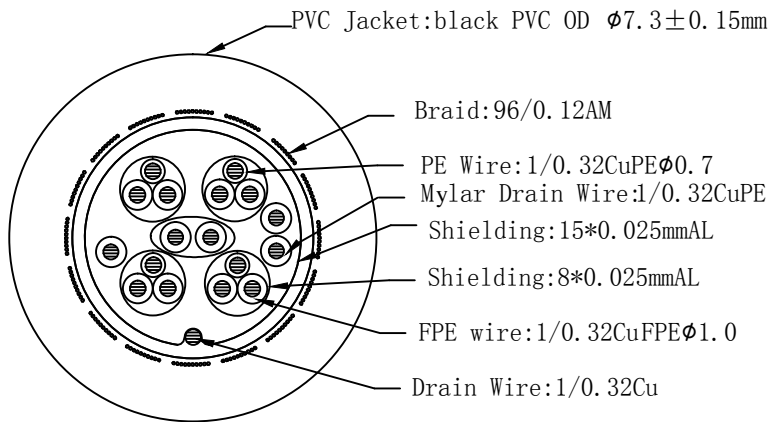

Pin Assignment

P1	P2	P1	P2
PIN 2	PIN 2	PIN 6	PIN 6
PIN 1	PIN 1	PIN 7	PIN 7
PIN 3	PIN 3	PIN 14	PIN 14
PIN 10	PIN 10	PIN 15	PIN 15
PIN 9	PIN 9	PIN 16	PIN 16
PIN 11	PIN 11	SHELL	SHELL
PIN 18	PIN 18		
PIN 17	PIN 17		
PIN 19	PIN 19		
PIN 23	PIN 23		
PIN 24	PIN 24		
PIN 22	PIN 22		

Pin assignment diagram showing the connection between the two connectors. The diagram shows the pins of the two connectors and their corresponding connections. The pins are labeled PIN 2, PIN 1, PIN 3, PIN 10, PIN 9, PIN 11, PIN 18, PIN 17, PIN 19, PIN 23, PIN 24, and PIN 22. The connections are shown as lines between the pins of the two connectors.

PART NO.	CABLE LENGTH
AK3819	0.5M
AK3820	2M
AK3821	3M
AK3822	5M
AK3823	1M
AK3824	1.5M

		ITEM NUMBER				DRAWER	YU	
BOM LIST		TITLE	DVI18+1Pin28AWG			CHECKED		
NO.	SPECIFICATIONS					APPROVED		
1	DVI(18+1) UL20276 28AWG OD:7.3 (1/0. 32Cu*1P+1/0. 32Cu+AL+M)*4+(1/0. 32Cu*1P)+1/0. 32Cu*3C+D1/0. 32Cu+96AM+AL-D							
2	Black cable housing,connector nickel plated 15PIN							
3	Clear PE inner molding		MATERIAL		SCALE			
4	PE32 black screw		REV.	A	UNIT	INCH		
			DRAWING NO:					