


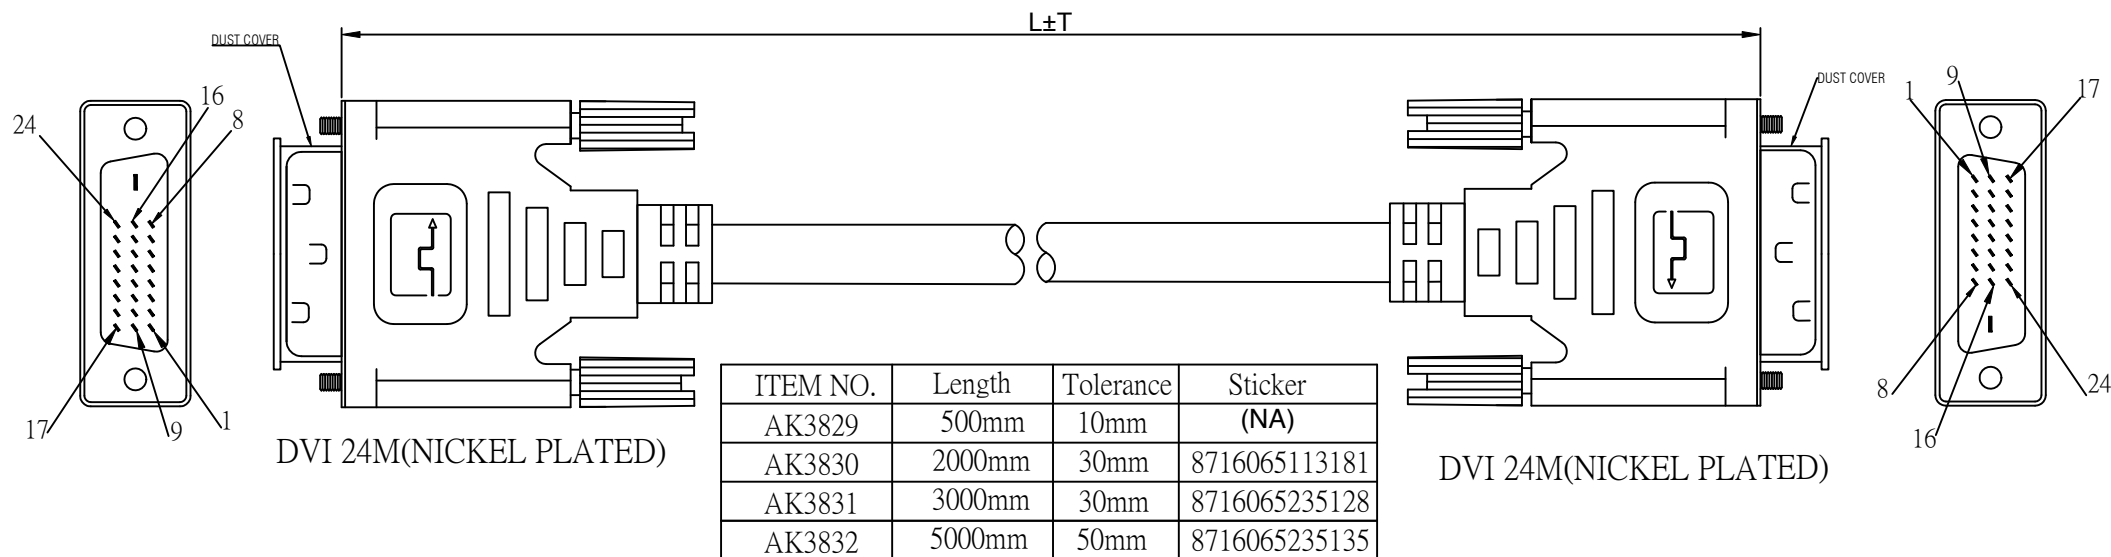

NOTE:



- CABLE: UL20276,(28#*1P+EAM)*7PCS+28#*1P+28#*3C+AEB
BLACK COLOR,OD=8.6mm,PVC JACKET.
- LENGTH: L
- CONNECTOR: DVI24+1M* 2PCS.(BLACK INSULATOR,NICKEL PLATED)
- MOLD: BLACK.
- SCREW: 4*40 UNC 2.78*44mm BLACK
- CONTACTS:

DVI24M	1	2	3	3	4	5	6	7	9	10	11	11	12	13	17	18	19
DVI24M	1	2	3	3	4	5	6	7	9	10	11	11	12	13	17	18	19
	TP	GND	GND	TP	TP	TP	TP	TP	TP	GND	GND	TP	TP	TP	TP	GND	GND

19	20	21	22	23	24	14	15	16	64
19	20	21	22	23	24	14	15	16	64
GND	TP	GND	TP	TP	TP	28AWG			

- OPEN/SHORT TEST: 100% TEST.
INSULATION: 5M.

- RoHS COMPLIANT.

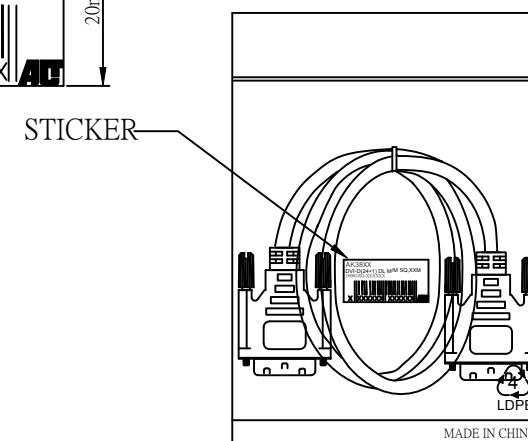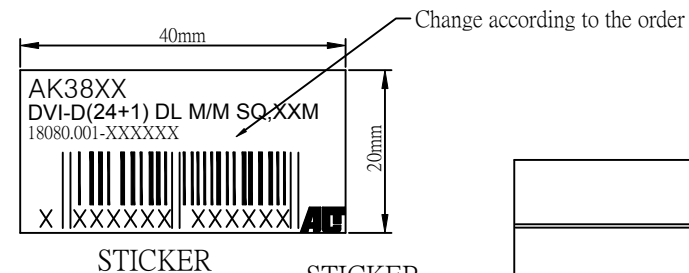

RoHS Compliant

1PCS/PE BAG(0.06*190*300mm)+STICKER

Company	IBV	Goods Code		Draw	F16	Date	2014.11.28
ITEM NO.	AK3829~AK 3832	Drawing Evidence:		Check		Date	
Goods NO.				Approval		Date	
Original NO.	S-*****	Unit(mm)					

AC

D		
C		
B		
VER. A	REVISE	Date