


RoHS Compliant ✓

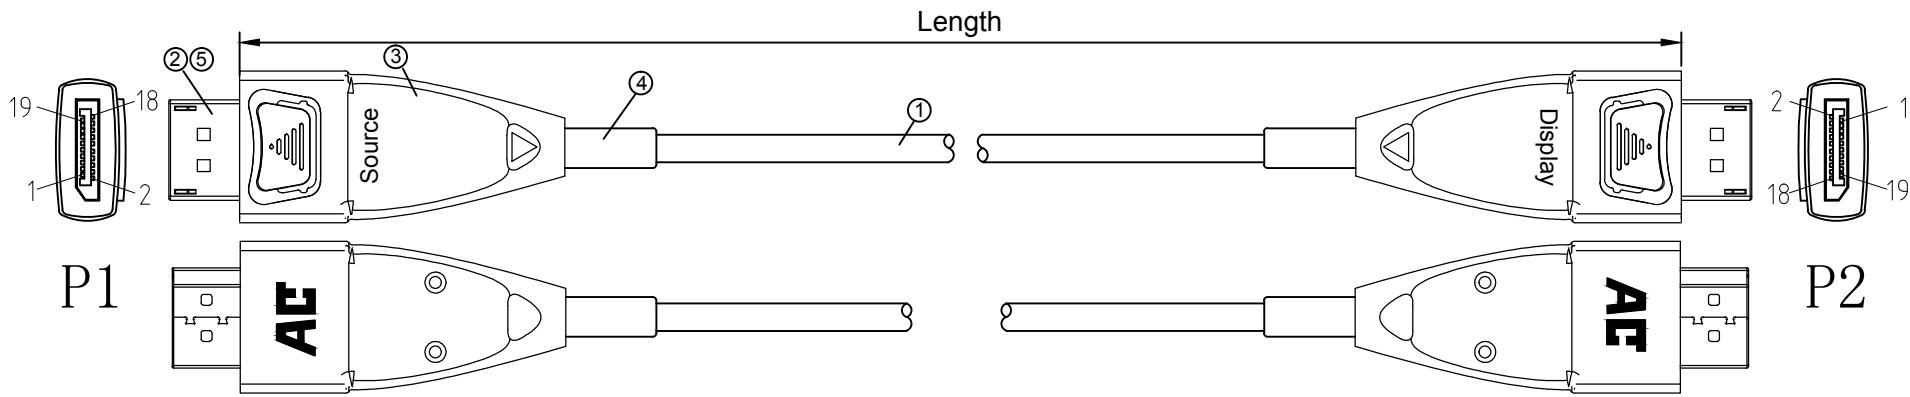

KEY FEATURES

- ◆ Up to 100m Maximum Length.(Custom Length Available)
- ◆ Supports computer resolutions to **4K@60Hz@4:4:4**
- ◆ Plug and Play
- ◆ Compatible with **DP1.2 standard**
- ◆ No loss of signal
- ◆ Hybrid optical cable with fiber and copper wire

Applications

- ◆ Digital Signage
- ◆ LED signboards in streets and in stadiums
- ◆ Medical Imaging Equipment
- ◆ Airplane On-board Video System
- ◆ Home Theater
- ◆ Blue-ray, 3D video, Projector, Set-up box, DVR, Game Consoles and Computer
- ◆ TV Broadcast Station
- ◆ Conference Room Video Equipment
- ◆ Security systems

Absolute Maximum Rating

Parameter	Symbol	Min	Max	Unit
Power Supply Voltage	VCC	3.2	3.5	V
Operating Temperature	Top	-20	50	°C
Storage Temperature	Ts	-40	70	°C
Relative Humidity	Hs	10	80	%RH

Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Power Supply Voltage	VCC	3.2	3.3	3.5	V
Operating Temperature	Top	-20		50	°C


PIN	Function	PIN	Function
1	IN ML Lane3 (n)	11	GND
2	GND	12	IN ML Lane0 (p)
3	IN ML Lane3 (p)	13	GND
4	IN ML Lane2(n)	14	GND
5	GND	15	I/O AUX CH (p)
6	IN ML Lane2 (p)	16	GND
7	IN ML Lane1 (n)	17	I/O AUX CH (n)
8	GND	18	OUT Hot Plug Detect
9	IN ML Lane1 (p)	19	RTN Ruturn
10	IN ML Lane0 (n)	20	PowerOut DP PWR

Item NO.	Length(m)
AK4030	10.0m
AK4031	15.0m
AK4032	20.0m
AK4033	30.0m
AK4034	40.0m
AK4035	50.0m
AK4036	60.0m
AK4037	70.0m
AK4038	80.0m
AK4039	90.0m
AK4040	100.0m

Specifications

Item	Description
Units	Transmitter (Source) Receiver (Sink)
HDCP & DDC	HDCP 1.1 & HDCP 1.3
Video Bandwidth	21.6 Gbps
Supported	4k@60Hz@4:4:4
Resolution & Distance	
Connector Type	PD type A
Cable Type	Hybrid type with OM3 fiber and copper
Cable Length	75m/100m(with +/- cm tolerance) Custom length available.
Cable Outer Diameter	4.8mm
Jacket Outer Material	TPU(Custom)
Differential Input	100 ohm (typ)

DP Type A Pin Assignmentz



⑤		DP Protective Cap, PE	2PCS	
④	SR	Black	2PCS	
③	Shell	Metal Shell, Gun color	2Sets	
②	Connector	Displayport male, Gold-Plated	2Sets	
①	Cable	DP 1.2 Optical Cable OD4.8		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK

TOLERANCES UNLESS OTHERWISE STATED
X. = ± 1
.X = ± 0.2
.XX = ± 0.1

AC			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	DP 1.2 Active Optical Cable		PAGE NO 1/1
APPROVAL		CHECKED	