


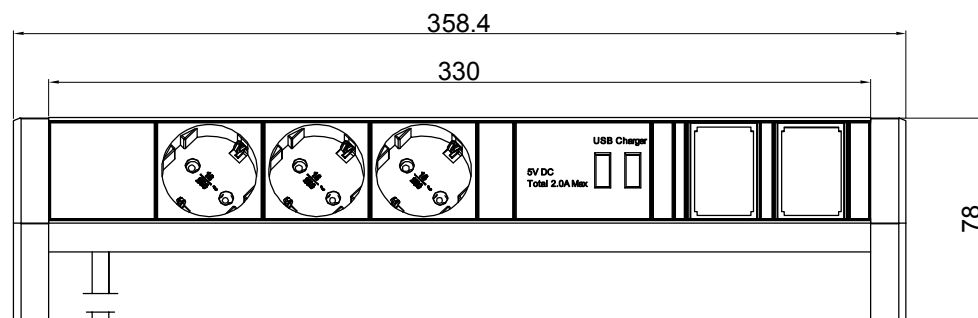




RoHS Compliant

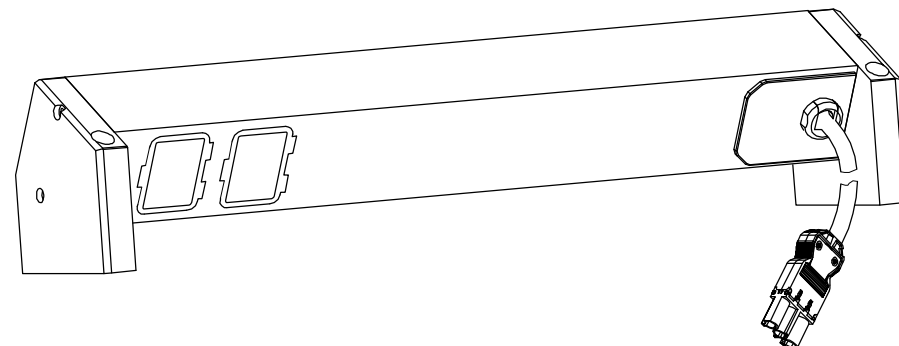

Blank module cover 2PCS

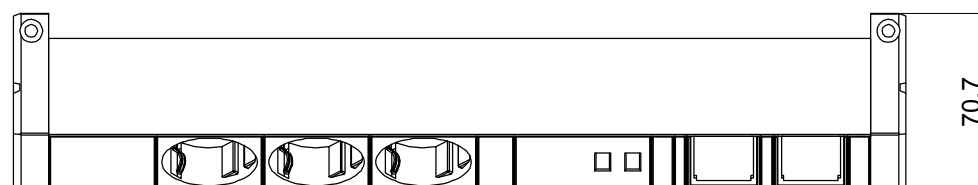

DS Fixing Bolt 2PCS



Screw M5×30 2PCS
Screw M5×45 2PCS

Desk-Top Series	OUTPUT (3) Schuko Socket with children (16A Rated) (2) USB Charger Total 2.0A Max, 5V DC (2) Empty module	OPERATING TEMPERATURE 0° to 60°C
INPUT 250VAC 16A 50HZ EPN1104 Socket 0.6M H05VV-F3G1.5mm ² Power lead	BRANCH CIRCUITS (NONE)	MOUNTING ACCESORIES (2)DS Fixing Bolt (2)Screw M5×30 (2)Screw M5×45

Revisions		
Rev	Description	Date

DRAWING TYPE  (NO PERMISSION,NO CHANGING)		BN3227	
unit=mm		Housing	Aluminar (Grey)
TECHNICAL STANDARD 1.IT11; 2.NO RUSTNESS 3.NO FLAW ON THE SURFACE			Endcover PA6GF (Black)
			PDS7033
FILLET	R0.5	PLENTY	
ANGLE	±0.5°		
FIRST ANGLE 			
SCALE 1:3		DATE 27-06-2018	