


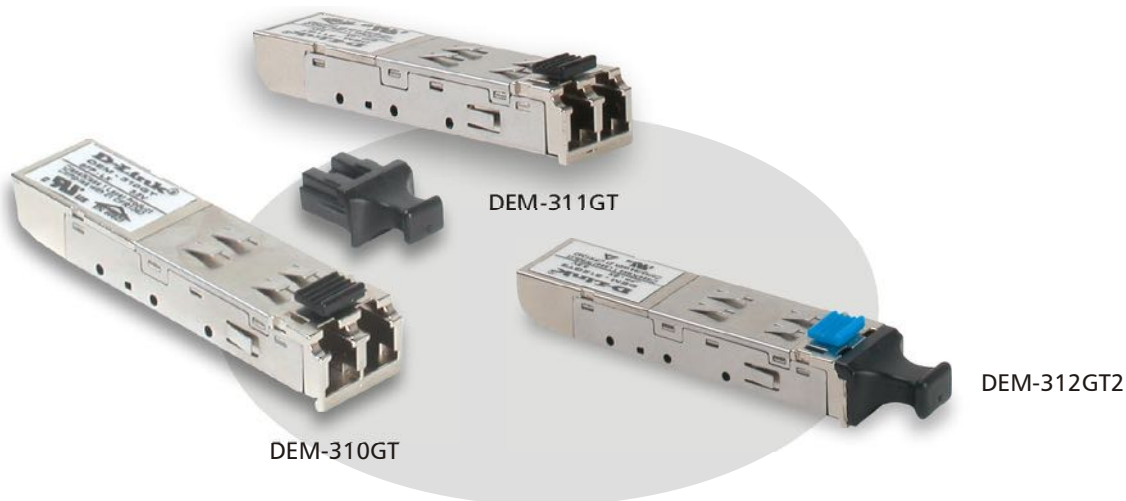

Mini GBIC Transceivers

D-Link Gigabit Interface Converters (GBIC) are transceivers that connect Gigabit switches and 10/100Mbps switches with GBIC slots to Gigabit Ethernet networks, providing high-speed connections over the fiber-optic or twisted-pair cable. The fiber-optic transceivers have standard duplex LC connectors for connection compatibility.

Small Form Pluggable (SFP) Package

These transceivers use the industry-standard Small Form Pluggable (SFP) package. They slide into the mini GBIC slot of the Gigabit device. They provide the necessary signal amplification for data to be transmitted to the network cable from the port, and vice versa, for the port to receive data from the network cable.

Hot Swappable

All D-Link Mini GBIC transceivers are hot-swappable. You can remove or replace the GBIC transceiver with the system

powered on. This permits modules and mini-GBICs to be added or swapped without interrupting the network.

Applications

Applications of the fiber transceivers include distributed multi-processing, Gigabit switch cascading, high-speed I/O file transfer, bus extension application, and channel extender/data storage.

Single-mode Fiber Transceiver (10 km)

DEM-310GT

- 1000BASE-LX port (IEEE 802.3z standard)
- Duplex LC connector
- Full duplex operation
- 802.3x flow control support
- Fiber type: 9um single-mode fiber up to 10 km
- Wave length: 1310nm
- Power support: 3.3V
- Power budget: 10.5dB
- Hot pluggable
- Class 1 laser product complies with EN 60825-1
- TTL signal detect indicator

Multi-mode Fiber Transceiver (550 m)

DEM-311GT

- 1000BASE-SX port (IEEE 802.3z standard)
- Duplex LC connector
- Full duplex operation
- 802.3x flow control support
- Fiber type: 50um or 62.5um multi-mode fiber up to 550 m
- Wave length: 850nm
- Power support: 3.3V
- Hot pluggable
- Class 1 laser product complies with EN 60825-1
- TTL signal detect indicator

Multi-mode Fiber Transceiver (2 km)

DEM-312GT2

- 1000BASE-SX port (IEEE 802.3z standard)
- Duplex LC connector
- Full duplex operation
- 802.3x flow control support
- Fiber type: 62.5um multi-mode fiber up to 2 km
- Wave length: 1310nm
- Power support: 3.3V
- Hot pluggable
- Class 1 laser product complies with EN 60825-1

Product Description

Transceiver

Physical & Environmental

Operating Temperature

0° - 40°C

Storage Temperature

-25° - 55° C

Humidity

5% - 95% non-condensing

Ordering Information

Mini GBIC Transceiver

DEM-310GT	For 1000BASE-LX, single-mode fiber, 10 km max., 3.3V
DEM-311GT	For 1000BASE-SX, multi-mode fiber, 550 m max., 3.3V
DEM-312GT2	For 1000BASE-SX, multi-mode fiber, 2 km max., 3.3V

D-Link®

Specifications subject to change without prior notice.
D-Link is a registered trademark of D-Link Corporation/D-Link System Inc. All other trademarks belong to their proprietors.

U.S.A	TEL: 1-949-788-0805	FAX: 1-949-753-7033
Canada	TEL: 1-905-8295033	FAX: 1-905-8295095
Europe	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511
Germany	TEL: 49-6196-77990	FAX: 49-6196-7799300
France	TEL: 33-1-30238688	FAX: 33-1-30238689
Benelux	TEL: 31-10-2045740	FAX: 31-10-2045880
Italy	TEL: 39-2-2900-0676	FAX: 39-2-2900-1723
Iberia	TEL: 34-93-4090770	FAX: 34-93-4910795
Sweden	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901
Norway	TEL: 47-22-309075	FAX: 47-22-309085
Denmark	TEL: 45-43-969040	FAX: 45-43-424347
Finland	TEL: 358-9-2707-5080	FAX: 358-9-2707-5081
Singapore	TEL: 65-6774-6233	FAX: 65-6774-6322
Australia	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868
Japan	TEL: 81-3-5434-9678	FAX: 81-3-5434-9868
China	TEL: 86-10-8518-2533	FAX: 86-10-8518-2250
India	TEL: 91-22-652-6696	FAX: 91-22-652-8914
Middle East	TEL: 9714-8834234	FAX: 9714-8834394
Turkey	TEL: 90-212-335-2553	FAX: 90-212-335-2500
Chile	TEL: 56-2-232-3185	FAX: 56-2-232-0923
Brasil	TEL: 55-11-3094-2910	FAX: 55-11-3094-2921
South Africa	TEL: 27(0)1266-52165	FAX: 27(0)1266-52186
Russia	TEL: 7-095-737-3389	FAX: 7-095-737-3390
Taiwan	TEL: 886-2-2910-2626	FAX: 886-2-2910-1515
D-Link Corp.	TEL: 886-2-2916-1600	FAX: 886-2-2914-6299



RECYCLABLE
Rev. 02 (Mar. 2003)
Printed in Taiwan