

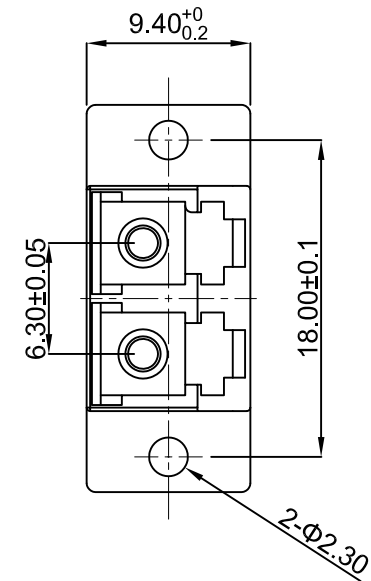


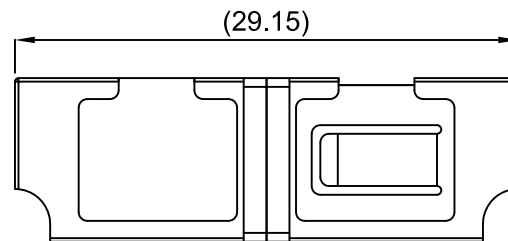

REV.	REVISION	DATE

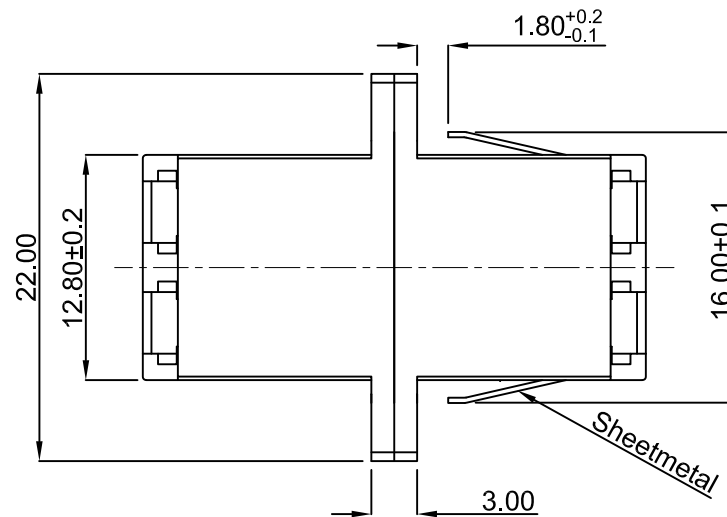

General Specification

Item	Unit	Parameter
Insertion Loss	Typical	dB
	Maximum	dB
Durability	dB	<0.20, typical change, 500 matings
Sleeve Pull Force	kgf	0.2-0.6
Operating Temp. Range	°C	-40~85

CUSTOMER APPROVAL:

DATE:

AC

	UNIT: mm	TITLE: LC DUPLEX ADAPTER SM BLUE		
	DRAWN BY Vernon	DATE 2016/05/04	CUSTOMER	CUSTOMER PART NO. EA1004
CHECKED BY Wale	DATE 2016/05/05	DRAWING NO.	Ref. NO.	REV. A
APPROVED BY David	DATE 2016/05/05	TRENDX PART NO.		
SALE BY	DATE			

Remark:

1.Housing material :PBT

2.Sleeve material : Zirconia ZrO2

ITEM	Q'TY	PART NO.	DESCRIPTION
PART LIST			