


LC Quad Plastic Adapter, Multimode, Aqua

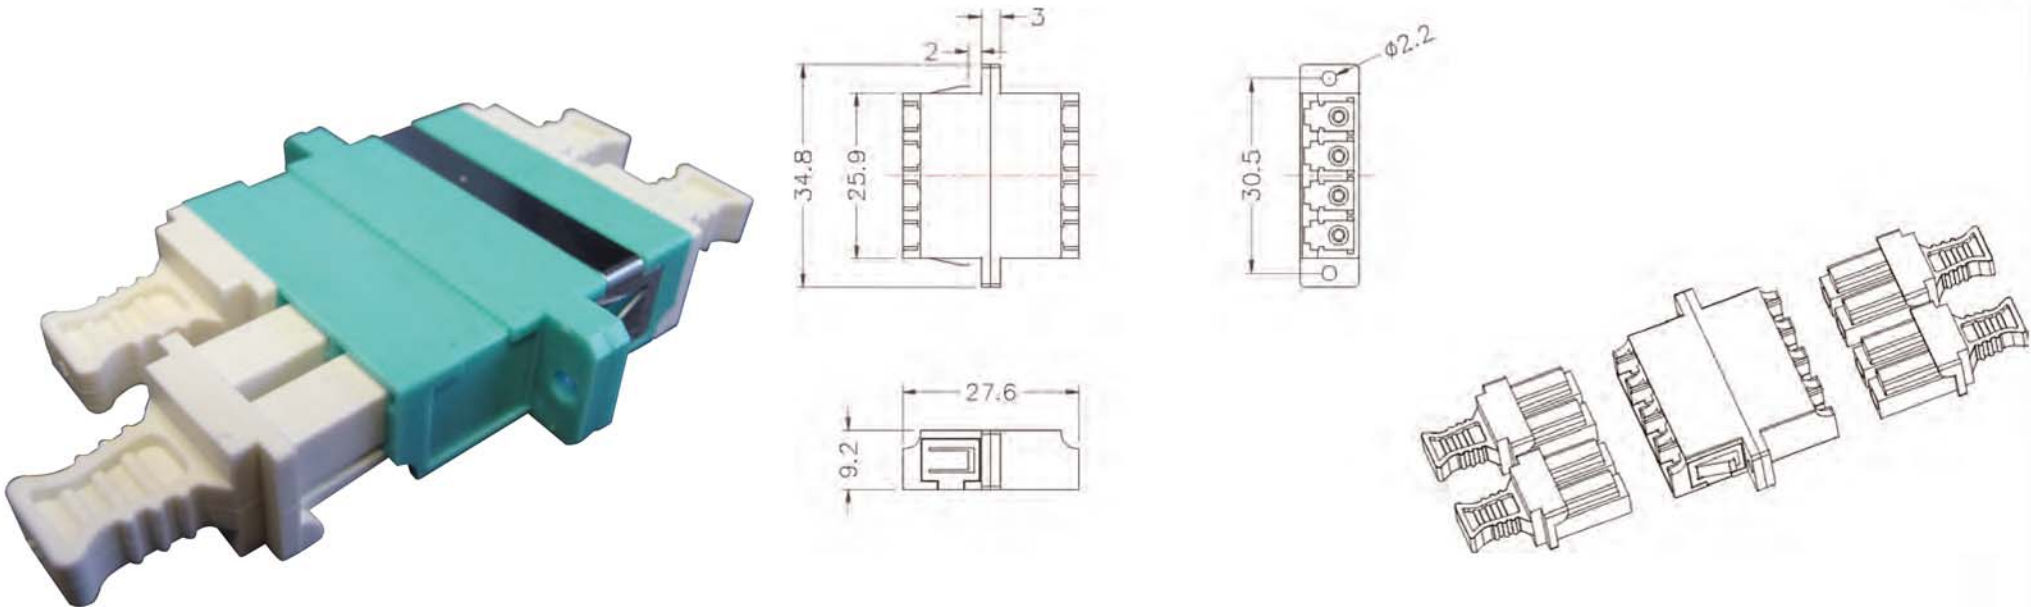

The performance of the adapters has been carefully designed to meet the toughest Telcordia standards

GR-326-CORE
RoHS compliance of item and package conformance to IEC 61754-20

in the tests of:

- Optical characteristics
- Vibration test
- Thermal cycling
- Impact resistance
- Salt spray erosion
- Thermal aging
- Humidity resistance

Item	Parameter
Sleeve Material	ceramic (ZrO ₂)
Insertion Loss (typ.)	≤ 0.20 dB @850nm
Durability (500 matings)	0.2 dB increase max.
Operating Temperature	-25°C ~ +70°C
Storage Temperature	-40°C ~ +80°C

- Snap-in fixing possible
- Incl. 2 screws M2 x 8

RoHS
compliant

Created MN	Date 03.05.10	LC Quad Adapter Multimode, Aqua EA9008	
Last rev. MN	Date 07.01.11		