

1

2


3

4

5





6

A

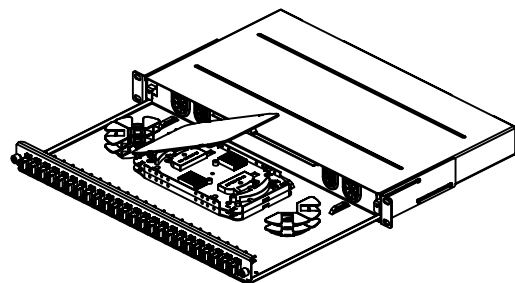

SCALE 1/10

B

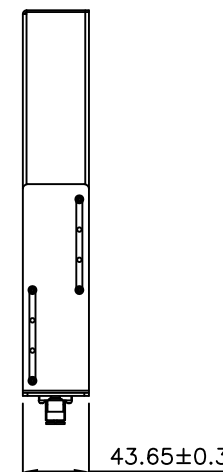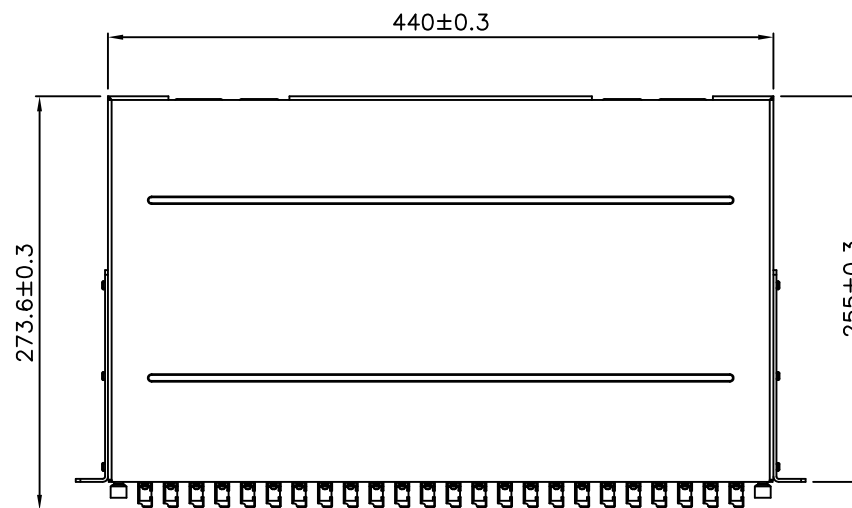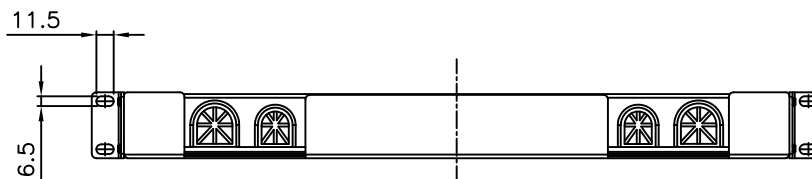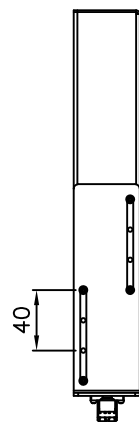

Specification :


Material :


1. Panel : Material : SPCC, 1.2mm Thickness, BK(RAL9005)
2. Adaptor
 - 2-1. Housing : Polycarbonate, UL94V-0, Blue color.
 - 2-2. Adaptor Sleeve: Zirconia sleeve.
 - 2-3. Holder : Polycarbonate, UL94V-0, Blue color.
 - 2-4. Dust Cover : PP, White Color.

Performance :

- a. Height : 1U(43.65mm) Width : 19"(482.6mm) Depth : 10"(255.0mm)
- b. Shelf Mounting Adjustment Range : 0~245.0mm
- c. Net Weight :
- d. LC to LC Duplex Type.
- e. Durability : 500 cycles.
- f. Tensile Strength : 10 kgf.
- g. Insertion Loss : <0.2 dB(Singlemode).
- h. Operating Temperature : -20°C to +70°C.
- i. Storage Temperature: -40°C to +80°C.

D

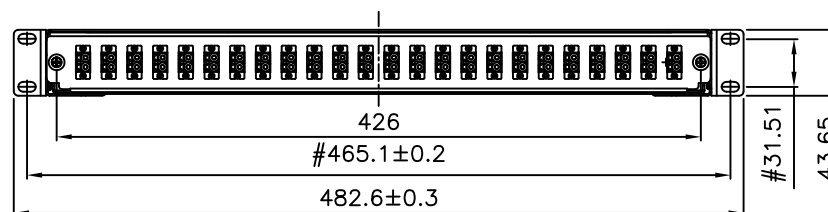

#": Matching DIM. ": Important DIM. Others General DIM.	DRAWING		26.AUG.2016		LJM								
	CHECK		26.AUG.2016		DAY								
	APPROVAL		26.AUG.2016		JAIMY								
GENERAL TOLERANCE OF DIMENSIONS		DATE		NAME		ITEM NO.: FA2036							
X.XXX ±0.005 X.XX ±0.05 X.X ±0.1		SCALE		1/5 (A4)		UNIT		mm		DES.: Fiber panel 24 x duplex LC singlemode OS2			
		DRAWING NO.		Fiber panel 24 x duplex LC singlemode OS2(S01)									
		DRAWING CLASSIFICATION		S		SHEET		1 OF 1					

1

2

0

3

4

10cm

5

6