

SCALE 1/10


Specification :


Material :

1. Panel : Material : SPCC, 1.2mm Thickness, BK(RAL9005)
2. Adaptor
 - 2-1. Housing : Polycarbonate, UL94V-0, Aque color.
 - 2-2. Adaptor Sleeve: Zirconia sleeve.
 - 2-3. Holder : Polycarbonate, UL94V-0, Aque color.
 - 2-4. Dust Cover : PP, White Color.

Performance :

- a. Height : 1U(43.65mm) Width : 19"(482.6mm) Depth : 10"(255.0mm)
- b. Shelf Mounting Adjustment Range : 0~245.0mm
- c. Net Weight :
- d. LC to LC Duplex Type.
- e. Durability : 500 cycles.
- f. Tensile Strength : 10 kgf.
- g. Insertion Loss : <0.3 dB(Multimode).
- h. Operating Temperature : -20°C to +70°C.
- i. Storage Temperature: -40°C to +80°C.

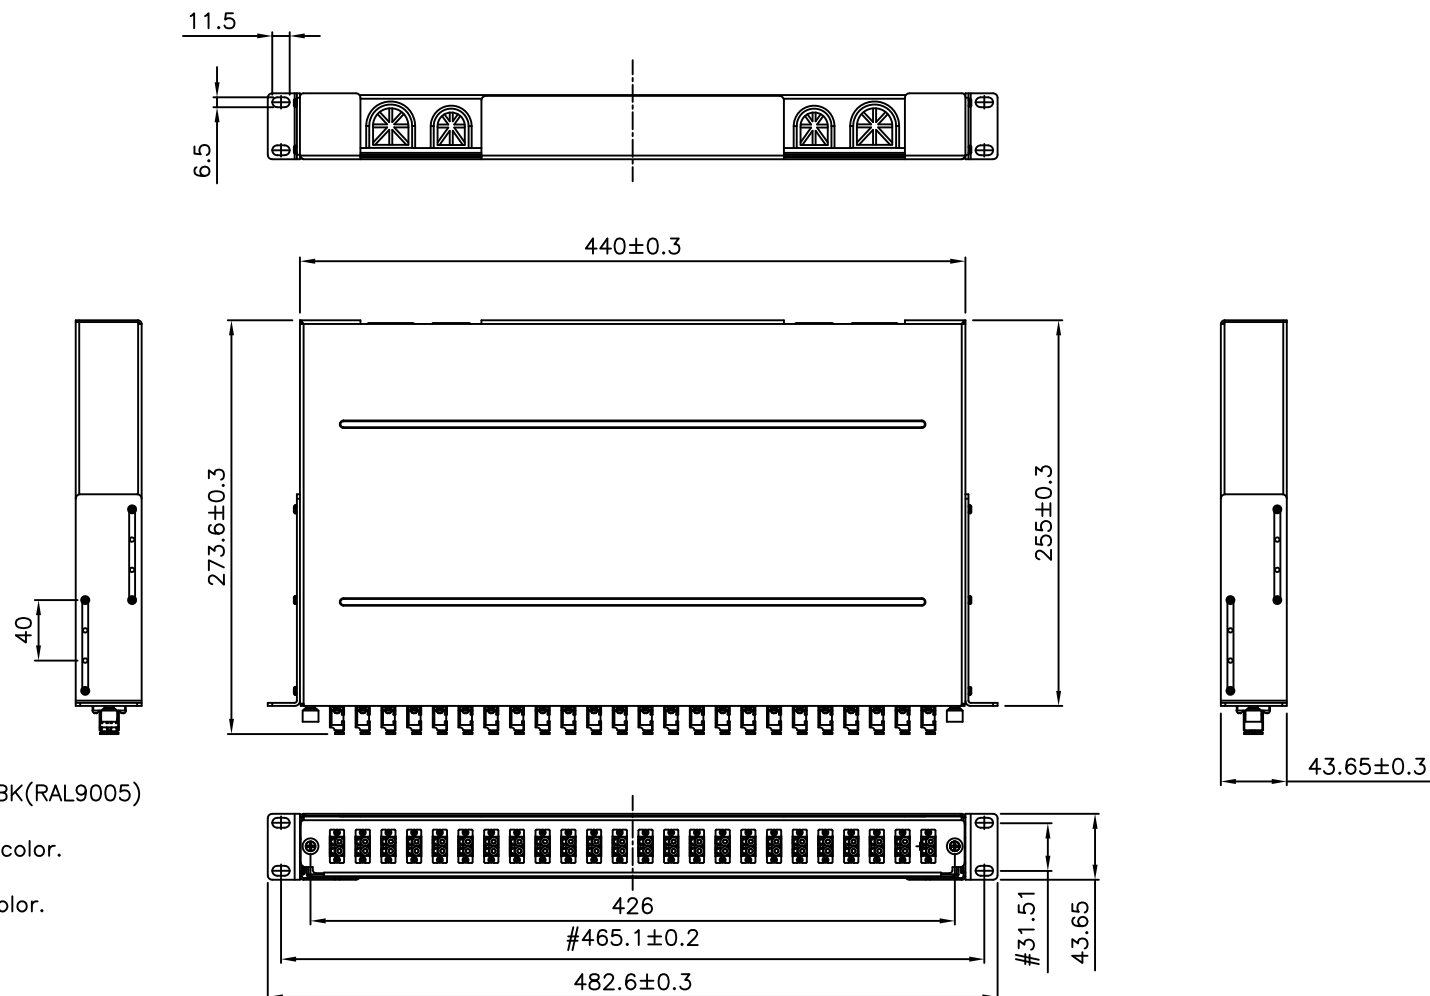

#": Matching DIM. ": Important DIM. Others General DIM.	DRAWING		26.AUG.2016	LJM					
	CHECK		26.AUG.2016	DAY					
	APPROVAL		26.AUG.2016	JAIMY					
GENERAL TOLERANCE OF DIMENSIONS		DATE		NAME		ITEM NO.: FA2037			
X.XXX ±0.005 X.XX ±0.05 X.X ±0.1		SCALE	1/5 (A4)	UNIT	mm	DES.: Fiber panel 24 x duplex LC multimode OM3			
		DRAWING NO.		Fiber panel 24 x duplex LC multimode OM3(S01)					
		DRAWING CLASSIFICATION		S	SHEET	1 OF 1			

1

2

0

3

4

10cm

5

6