
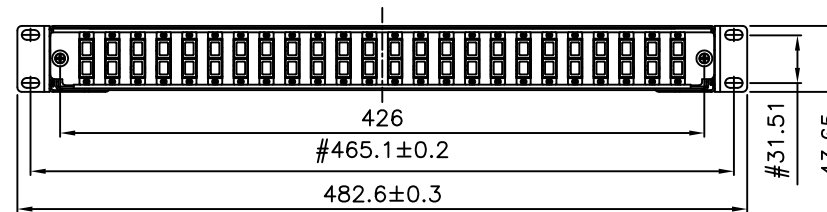
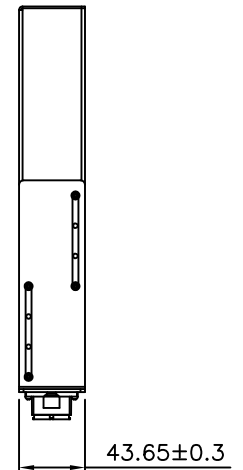
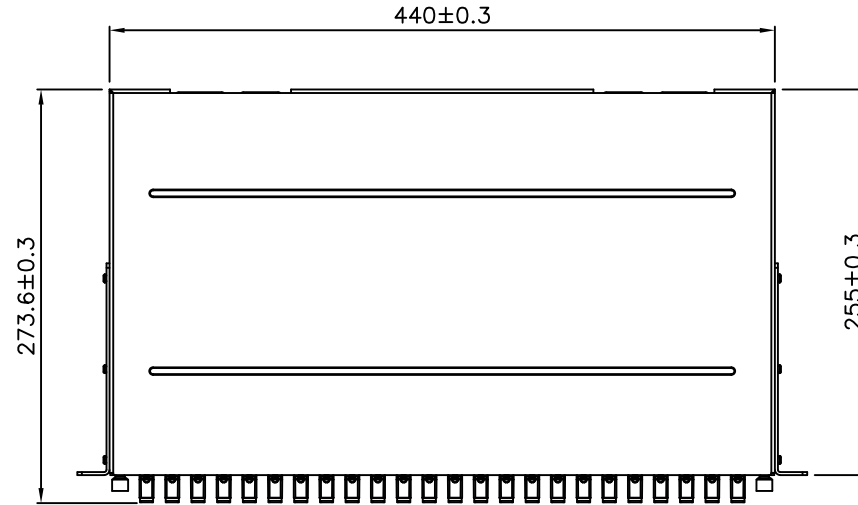
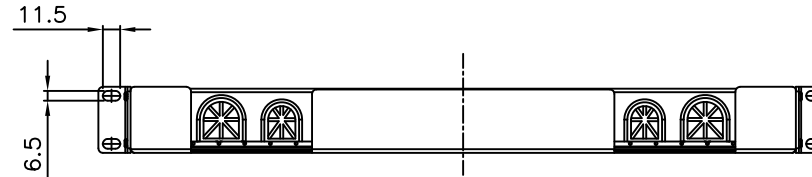


SCALE 1/10

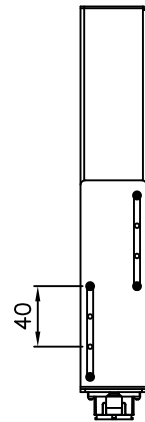

Specification :

Material :

1. Panel : Material : SPCC, 1.2mm Thickness, BK(RAL9005)
2. Adaptor
 - 2-1. SC Housing : PBT, UL 94V-0, Blue color.
 - 2-2. Adaptor Sleeve: Zirconia sleeve.
 - 2-3. Holder : PBT, UL 94V-0, Blue color.
 - 2-4. SC Dust Cover : PP, Black color.

Performance :

- a. Height : 1U(43.65mm) Width : 19"(482.6mm) Depth : 10"(255.0mm)
- b. Shelf Mounting Adjustment Range : 0~245.0mm
- c. Net Weight :
- d. SC to SC Duplex Type.
- e. Durability : 500 cycles.
- f. Tensile Strength : 10 kgf.
- g. Insertion Loss : <0.2 dB(Singlemode).
- h. Operating Temperature : -20°C to +70°C.
- i. Storage Temperature: -40°C to +80°C.

"#": Matching DIM. "※": Important DIM. Others General DIM. GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	26.AUG.2016	LJM		
	CHECK	26.AUG.2016	DAY		
	APPROVAL	26.AUG.2016	JAIMY		
	DATE		NAME	ITEM NO.: FA2038	
SCALE		1/5 (A4)	UNIT	mm	DES.: Fiber panel 24 x duplex SC singlemode OS2
		DRAWING NO.		Fiber panel 24 x duplex SC singlemode OS2(S01)	
		DRAWING CLASSIFICATION		S	SHEET 1 OF 1
				01	