
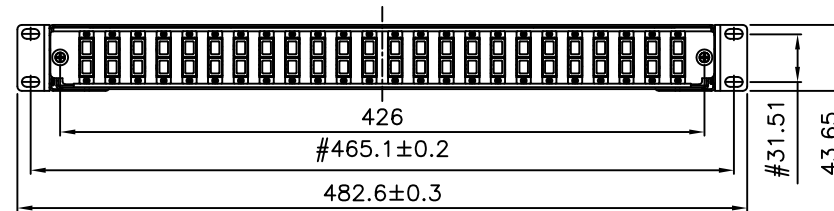
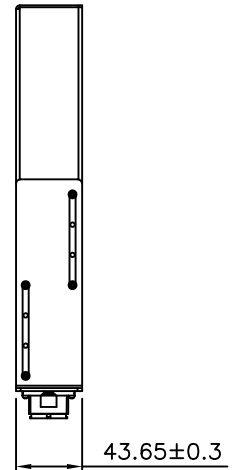
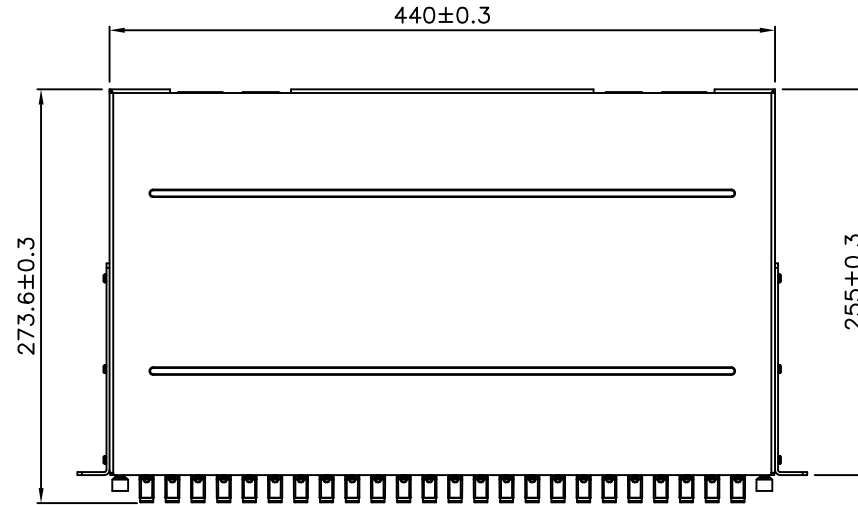
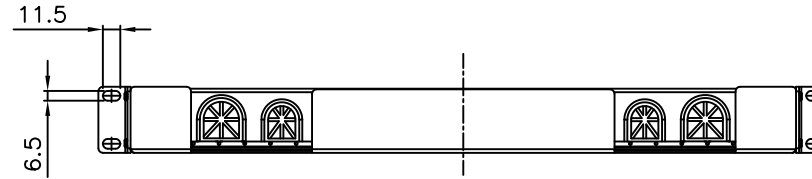


SCALE 1/10

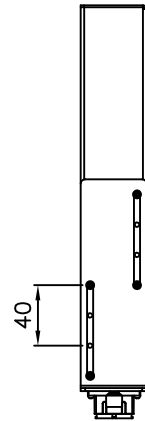

Specification :

Material :

1. Panel : Material : SPCC, 1.2mm Thickness, BK(RAL9005)
2. Adaptor
 - 2-1. SC Housing : PBT, UL 94V-0, Aque color.
 - 2-2. Adaptor Sleeve: Zirconia sleeve.
 - 2-3. Holder : PBT, UL 94V-0, Aque color.
 - 2-4. SC Dust Cover : PP, Black color.

Performance :

- a. Height : 1U(43.65mm) Width : 19"(482.6mm) Depth : 10"(255.0mm)
- b. Shelf Mounting Adjustment Range : 0~245.0mm
- c. Net Weight :
- d. SC to SC Duplex Type.
- e. Durability : 500 cycles.
- f. Tensile Strength : 10 kgf.
- g. Insertion Loss : <0.3 dB(Multimode).
- h. Operating Temperature : -20°C to +70°C.
- i. Storage Temperature: -40°C to +80°C.

"#": Matching DIM.
 "※": Important DIM.
 Others General DIM.

GENERAL TOLERANCE OF DIMENSIONS

X.XXX	±0.005
X.XX	±0.05
X.X	±0.1

DRAWING	26.AUG.2016	LJM	AE
CHECK	26.AUG.2016	DAY	
APPROVAL	26.AUG.2016	JAIMY	
DATE		NAME	ITEM NO.: FA2039
SCALE	1/5 (A4)	UNIT	mm
DRAWING NO.		Fiber panel 24 x duplex SC multimode OM3(S01)	
DRAWING CLASSIFICATION		S	SHEET 1 OF 1

