


| DATE | REV | DESCRIPTION | BY | CHKD |
|------|-----|-------------|----|------|
|      |     |             |    |      |
|      |     |             |    |      |
|      |     |             |    |      |

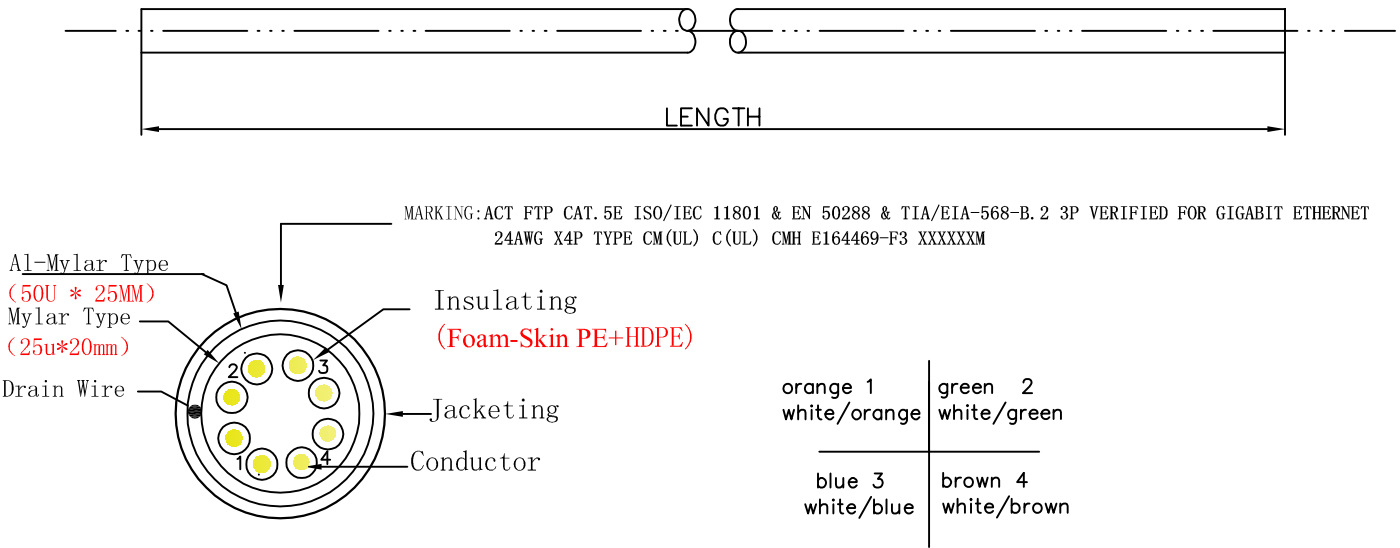

|            |  |
|------------|--|
| Conductor  | Bare Copper<br>24AWG 1/0.52±0.005mm  |
| Insulation | Thickness:MIN at any point:0.15mm<br>MAX AVG:0.25mm<br>Diameter:1.04±0.06mm      |
| Jacketing  | PVC<br>Thickness:MIN at any point:0.50mm<br>MAX AVG:0.60mm<br>Diameter:6.0±0.2mm |

|           |                          |
|-----------|--------------------------|
| WIRE      | CAT. 5E FTP SLD 24AWG*4P |
| LENGHT    | 100M                     |
| WIRECOLOR | Ivory like FP305B        |
| NVP       | 69%                      |

RoHS Compliant

Unless specified on the drawing, tolerances are per the follows:  
. ± 1  
.X ± 0.2  
.XX ± 0.05



|            |    |         |        |                 |
|------------|----|---------|--------|-----------------|
|            |    |         |        |                 |
| DRAW.NO    |    | ITEM    | FS100H |                 |
| DEPARTMENT |    | DRAW    | WZY    | DATE 2007/10/12 |
| SCALE      |    | CHECKER |        | APPROVAL        |
| UNIT       | MM | SHEET   | 1 OF   | 1               |