

REF : COUPLK6AFS

Shielded coupler RJ45 type Keystone female/female Category 6A



Descriptions

- Shielded RJ45 coupler for connection of two RJ45 patch cords
- Connection without tool
- Format type Keystone

Standards

- EIA/TIA 568-C.2
- IEC 60603-7-51
- ISO/EIC 11801 Ed 2
- EN 50173

Technical and Electrical properties

Electrical properties	
Current rating	1.5 A
Insulation resistance	500 MΩ
Contact resistance	20 MΩ
DC resistance	0.1 MΩ
Mechanical properties	
Plug insertion life	750 cycles min
Temperature	-40 to 68°C


Physical properties

Housing	High impact flame retardant plastic
Shielded	0.25mm thickness electrolytic tin plate
Bracket	0.3t SUS 301
Jack wiring	Phosphor bronze Gold over Nickel plated

REF : COUPLK6AFS

Shielded coupler RJ45 type Keystone female/female Category 6A

3D picture

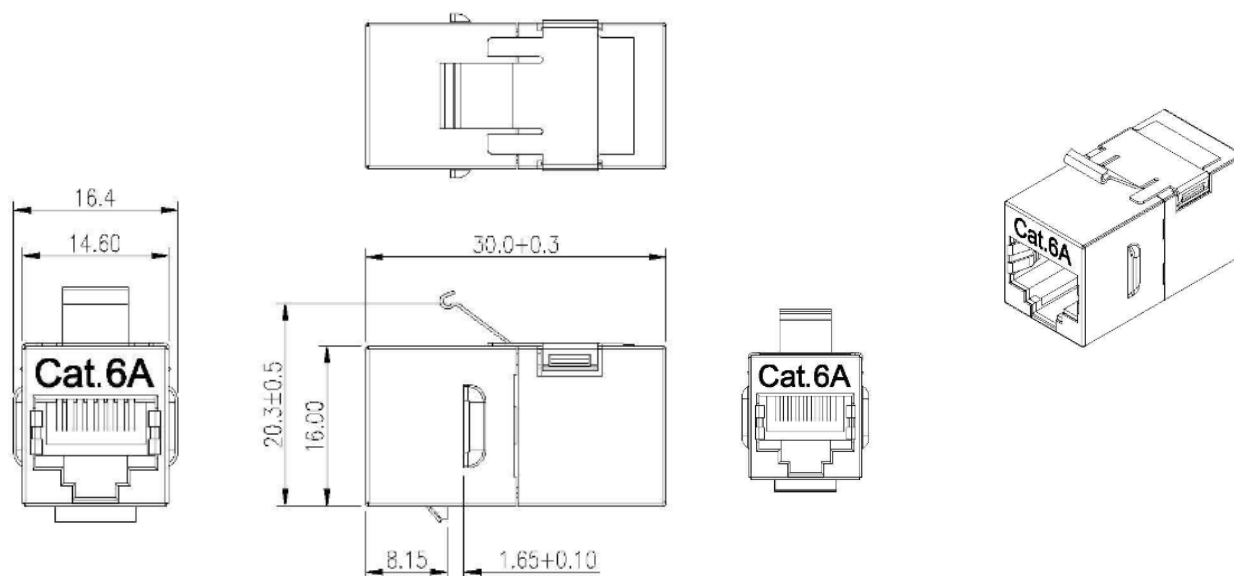

Ordering information

Item No	Designation	Packaging
COUPLK6AFS	Shielded coupler RJ45 female/female CAT6A	Unit