FEATURES AND SPECIFICATIONS



Features and Benefits


Cable Management Panels provide cable dressing during installation or changes and provide an organized format for system maintenance. Panels are comprised of black Lexan rings mounted on graphite grey, powdercoat panels and include mounting screws and washers.


PANEL CONSTRUCTION


Material	CRS (Cold Rolled Steel)	
	(p/n 25-206 is clear anodized aluminum)	
Thickness	.060" (1.52mm)	
Finish	Graphite grey powdercoat	

RING CONSTRUCTION

Material Black Lexan 943A-701



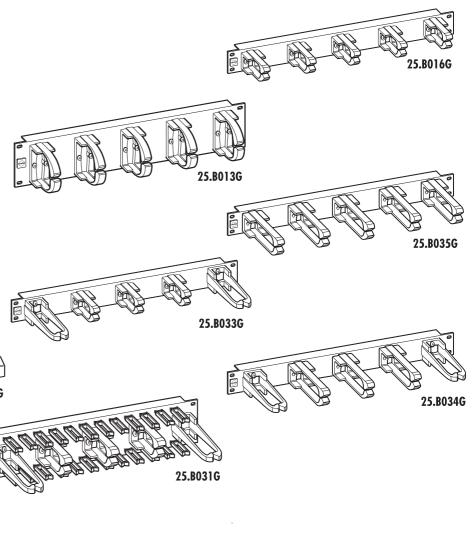



ORDERING INFORMATION

Order No.	Description	Dimensions	Weight
25.B016G	1 Pos. Ring Run	44mm x 483mm x 64mm	610g
25.B013G	2 Pos. Ring Run	88mm x 483mm x 67mm	936g
25.B035G	1 Pos. Deep Ring Run	44mm x 483mm x 127mm	695g
25.C001G	1 Pos. Cable Mgmt Panel	44mm x 483mm x 60mm	595g
25.B033G	1 Pos. Horiz/Vert Ring Run	44mm x 483mm x 127mm	665g
25.B034G	1 Pos. Deep Horiz/Vert Ring Run	44mm x 483mm x 127mm	665g
25.B032G	2 Pos. Horiz/Vert Ring Run	88mm x 483mm x 127mm	1035g
25.B031G	2 Pos. High Density Ring Run	88mm x 483mm x 127mm	1021g
CMA-00007	Rear Mt Strain Relief	25mm x 483mm x 38mm	170g

This information is correct as at the time of publication, specifications are subject to change

Corporate Headquarters Tel: 630 969 4550 www.molexpn.com European Headquarters Tel: 44 (0) 1489 572111 www.molexpn.co.uk Pacific Rim Headquarters Tel: 61 3 9971 7111 www.molexpn.com.au