


REV.	REVISION	DATE

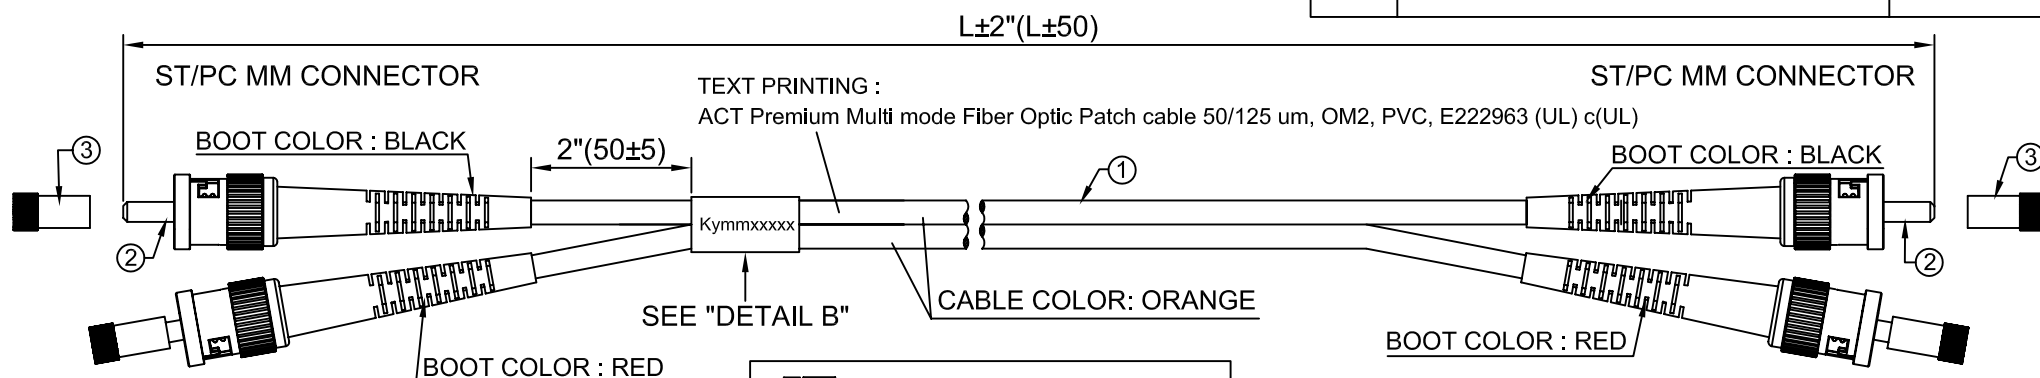

NOTE:


1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
5. TENSILE STRENGTH: 10Kg.
6. PACKING:

SEE TABLE "DESCRIPTION 1"

PO/NO:

SEE TABLE "DESCRIPTION 2"

ROUND CABLE METHOD SEE "DETAIL A"			
	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE
EACH LARGE POLYBAG IN AN OUTER CARTON			

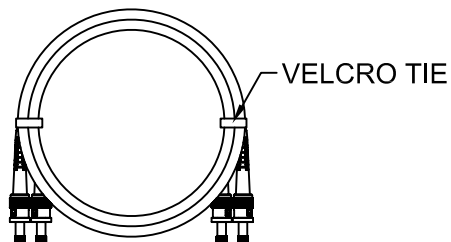

DETAIL A

ACT Fiber Optical Patchcord

ST/PC to ST/PC Duplex Multimode 50/125, OM2, $\Phi 3.0\text{mm}$ xxM-RoHS

Model: xxxxx-xxxxxx


Lot number: 

Performance: (@23°C) $\lambda=850/1310 \pm 20\text{nm}$

Serial No	Insertion Loss $\leq 0.3\text{dB}$	
	850nm	1310nm
Kymmxxxxx	A	
	B	
	C	
	D	

Prepared By: _____ Date: _____

DETAIL C



DETAIL B

y: Year; mm: Month
xxxxx: Serial Number

RL1530	30	30	98.4'(30000)	113230-RL1530	8716065223590
RL1520	20	20	65.6'(20000)	113220-RL1520	8716065223583
RL1515	15	15	49.2'(15000)	113215-RL1515	8716065223576
RL1510	10	10	32.8'(10000)	113210-RL1510	8716065223569
RL1505	05	5	16.4'(5000)	113205-RL1505	8716065223552
RL1503	03	3	9.84'(3000)	113203-RL1503	8716065223545
RL1502	02	2	6.56'(2000)	113202-RL1502	8716065223538
RL1501	01	1	3.28'(1000)	113201-RL1501	8716065223521
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2

CUSTOMER APPROVAL:

DATE:



	UNIT: Inches[mm]	TITLE: PATCHCORD ST-ST MULTIMODE DUPLEX 50/125, OM2, 3.0mm, ORANGE.		
	DATE 2007/10/4	CUSTOMER PART NO. RL15**		
DRAWN BY Catherine	DATE	DRAWING NO. PK709002	Ref. NO.	REV. A
CHECKED BY	DATE	TRENDX PART NO.		
APPROVED BY	DATE			
SALE BY	DATE			

3	4PCS		ST DUST COVER, CLEAR.
2	4SETS		CONNECTOR: ST/PC MM, WITH BLACK & RED BOOT.
1	1PC		CABLE: MULTIMODE, 50/125um, 3.0mm ZIPCORD, OFNR, ORANGE JACKET.
ITEM	Q'TY	PART NO.	DESCRIPTION
PART LIST			