


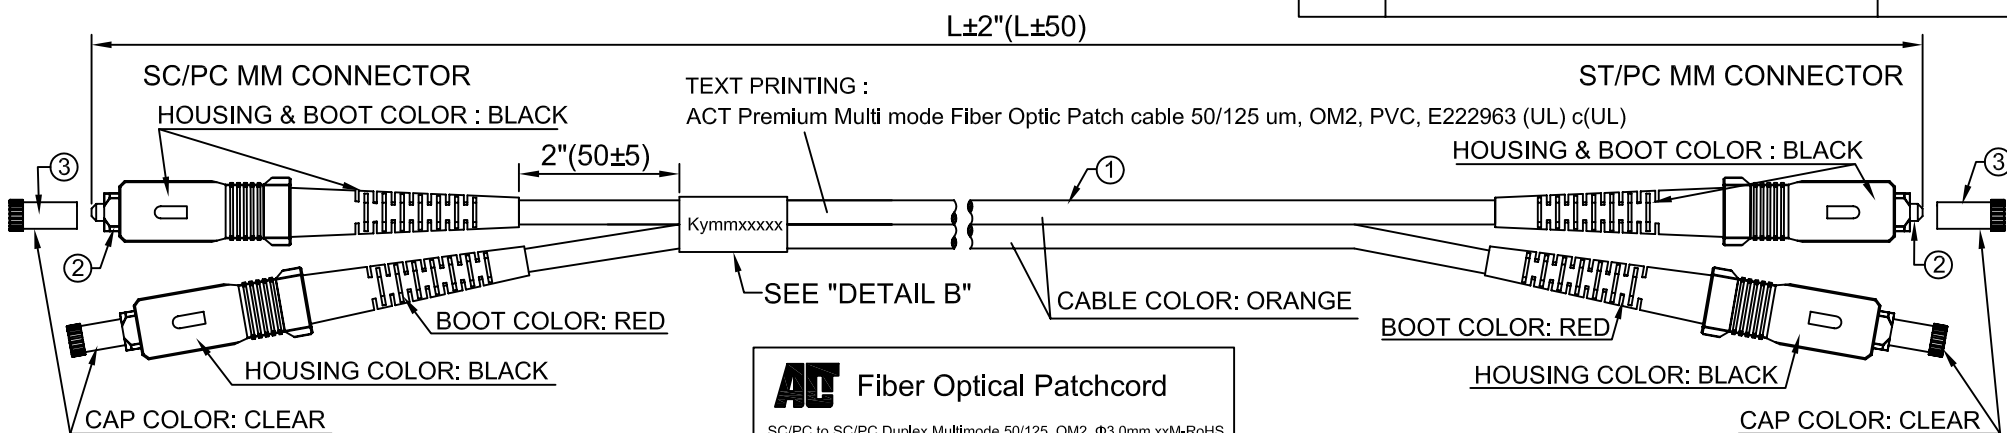


NOTE:

1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
5. TENSILE STRENGTH: 10Kg.
6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"

	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE
EACH LARGE POLYBAG IN AN OUTER CARTON			

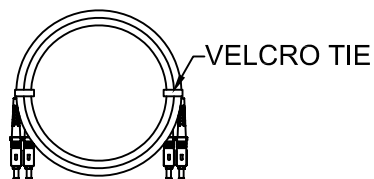

DETAIL A

SEE TABLE "DESCRIPTION 1"

AC Fiber Optical Patchcord

SC/PC to SC/PC Duplex Multimode 50/125, OM2, Ø3.0mm xxM-RoHS

Model: xxxxx -xxxxxx

Lot number: 


PO/NO: _____

Performance: (@23°C) λ=850/1310±20nm

Serial No	Insertion Loss ≤ 0.3dB	
	850nm	1310nm
Kymmxxxxx	A	
	B	
	C	
	D	

Prepared By: _____ Date: _____

DETAIL C



DETAIL B

y: Year; mm: Month
xxxxx: Serial Number


SEE TABLE "DESCRIPTION 2"

RL3550	50	50	164'(50000)	443250-RL3550	8716065223880
RL3520	20	20	65.6'(20000)	443220-RL3520	8716065223873
RL3515	15	15	49.2'(15000)	443215-RL3515	8716065223866
RL3510	10	10	32.8'(10000)	443210-RL3510	8716065223859
RL3505	05	5	16.4'(5000)	443205-RL3505	8716065223842
RL3503	03	3	9.84'(3000)	443203-RL3503	8716065223835
RL3502	02	2	6.56'(2000)	443202-RL3502	8716065223828
RL3551	51	1.5	4.92'(1500)	4432015-RL3551	8716065223811
RL3501	01	1	3.28'(1000)	443201-RL3501	8716065223804
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2

CUSTOMER APPROVAL:

DATE:



	UNIT: Inches[mm]	TITLE: PATCHCORD SC-SC MULTIMODE DUPLEX 50/125, OM2, 3.0mm, ORANGE.			
	DRAWN BY Catherine	DATE 2007/10/4	CUSTOMER	CUSTOMER PART NO. RL35**	
	CHECKED BY	DATE	DRAWING NO. PK709007	Ref. NO.	REV. A
	APPROVED BY	DATE	TRENDEX PART NO.		
	SALE BY	DATE			

3	4PCS		SC DUST COVER, CLEAR.
2	4SETS		CONNECTOR: SC/PC MM, BLACK HOUSING WITH BLACK & RED BOOT.
1	1PC		CABLE: MULTIMODE, 50/125um, 3.0mm ZIPCORDER, OFNR, ORANGE JACKET.

ITEM	Q'TY	PART NO.	DESCRIPTION
------	------	----------	-------------

PART LIST