


REV.	REVISION	DATE


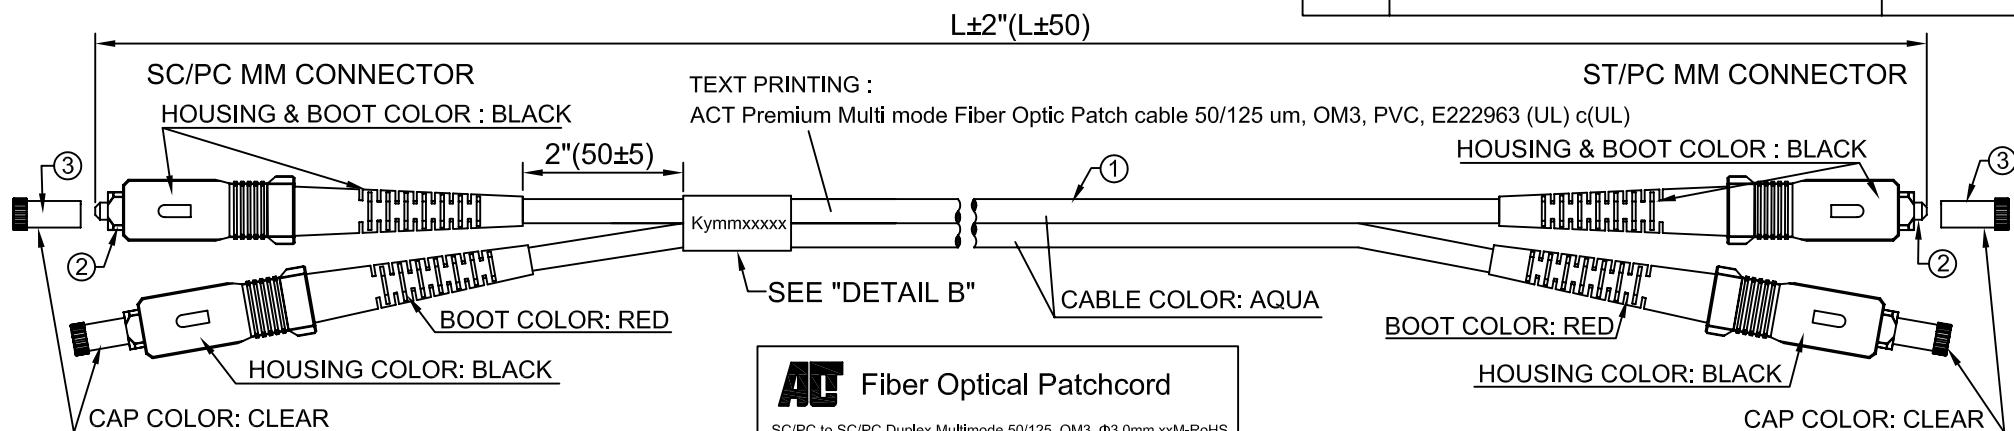


NOTE:


1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
5. TENSILE STRENGTH: 10Kg.
6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"

	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE
EACH LARGE POLYBAG IN AN OUTER CARTON			

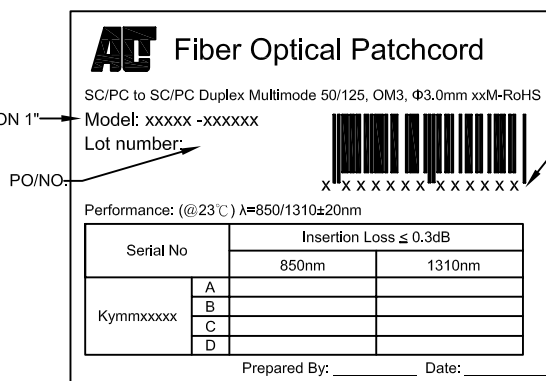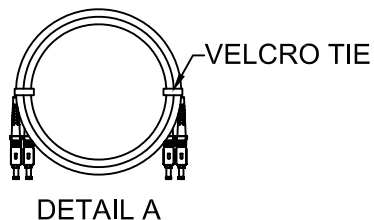

DETAIL C



DETAIL B

y: Year; mm: Month
xxxxx: Serial Number

RL3650	50	50	164'(50000)	444250-RL3650	8716065229240
RL3630	30	30	98.4'(30000)	444230-RL3630	8716065229233
RL3620	20	20	65.6'(20000)	444220-RL3620	8716065229226
RL3615	15	15	49.2'(15000)	444215-RL3615	8716065229219
RL3610	10	10	32.8'(10000)	444210-RL3610	8716065229202
RL3605	05	5	16.4'(5000)	444205-RL3605	8716065229196
RL3603	03	3	9.84'(3000)	444203-RL3603	8716065229189
RL3602	02	2	6.56'(2000)	444202-RL3602	8716065229172
RL3651	51	1.5	4.92'(1500)	4442015-RL3651	8716065229165
RL3601	01	1	3.28'(1000)	444201-RL3601	8716065229158
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2

CUSTOMER APPROVAL:

DATE:



	UNIT: Inches[mm]	TITLE: PATCHCORD SC-SC MULTIMODE DUPLEX 50/125, OM3, 3.0mm, AQUA		
	DATE 2008/3/3			
DRAWN BY Catherine	CHECKED BY	CUSTOMER	CUSTOMER PART NO. RL36**	
APPROVED BY	DATE	DRAWING NO. PK802001	Ref. NO.	REV. A
SALE BY	DATE	TRENDX PART NO.		

3	4PCS		SC DUST COVER, CLEAR.
2	4SETS		CONNECTOR: SC/PC MM, BLACK HOUSING WITH BLACK & RED BOOT.
1	1PC		CABLE: MULTIMODE, 50/125um, 3.0mm ZIPCORDER, OFNR, AQUA JACKET.
ITEM	Q'TY	PART NO.	DESCRIPTION
PART LIST			