




REV.	REVISION	DATE

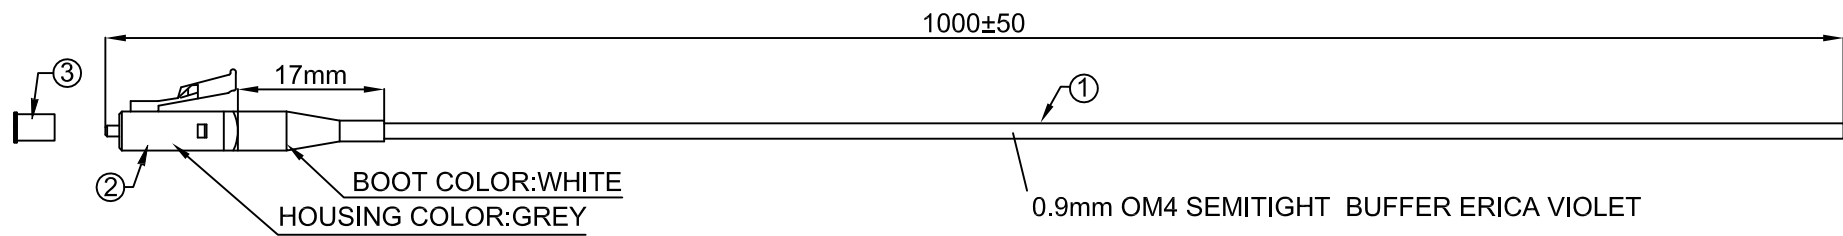

LC/UPC MM CONNECTOR

Remark:

1.Insertion Loss Typical:0.10 dB

Insertion Loss Max.: 0.20dB


2.Return Loss Min.:35dB

3.3D of UPC

Radius of Curvature:7~12mm

Vertex Offset:0um~40um

Fiber Height Spherical:-30nm~30nm

CUSTOMER APPROVAL:		DATE:		
AT				
		UNIT: mm	TITLE: PIGTAIL LCUPC MULTIMODE SIMPLEX OM4, 0.9mm SEMITIGHT BUFFER PVC ERICA VIOLET.	
DRAWN BY Vernon	DATE 2017.04.12	CUSTOMER	CUSTOMER PART NO.	
CHECKED BY Wale	DATE 2017.04.12			
APPROVED BY David	DATE 2017.04.12	DRAWING NO.	Ref. NO. RL3795	REV. C
SALE BY	DATE	TRENDEX PART NO.		

3	1PC		LC DUST COVER,WHITE.
2	1SET		CONNECTOR:LC/UPC MM,GREY HOUSING WITH WHITE BOOT.
1	1PC		CABLE:MULTIMODE,OM4,0.9mm SEMITIGHT BUFFER,PVC ERICA VIOLET.
ITEM	Q'TY	PART NO.	DESCRIPTION
PART LIST			