


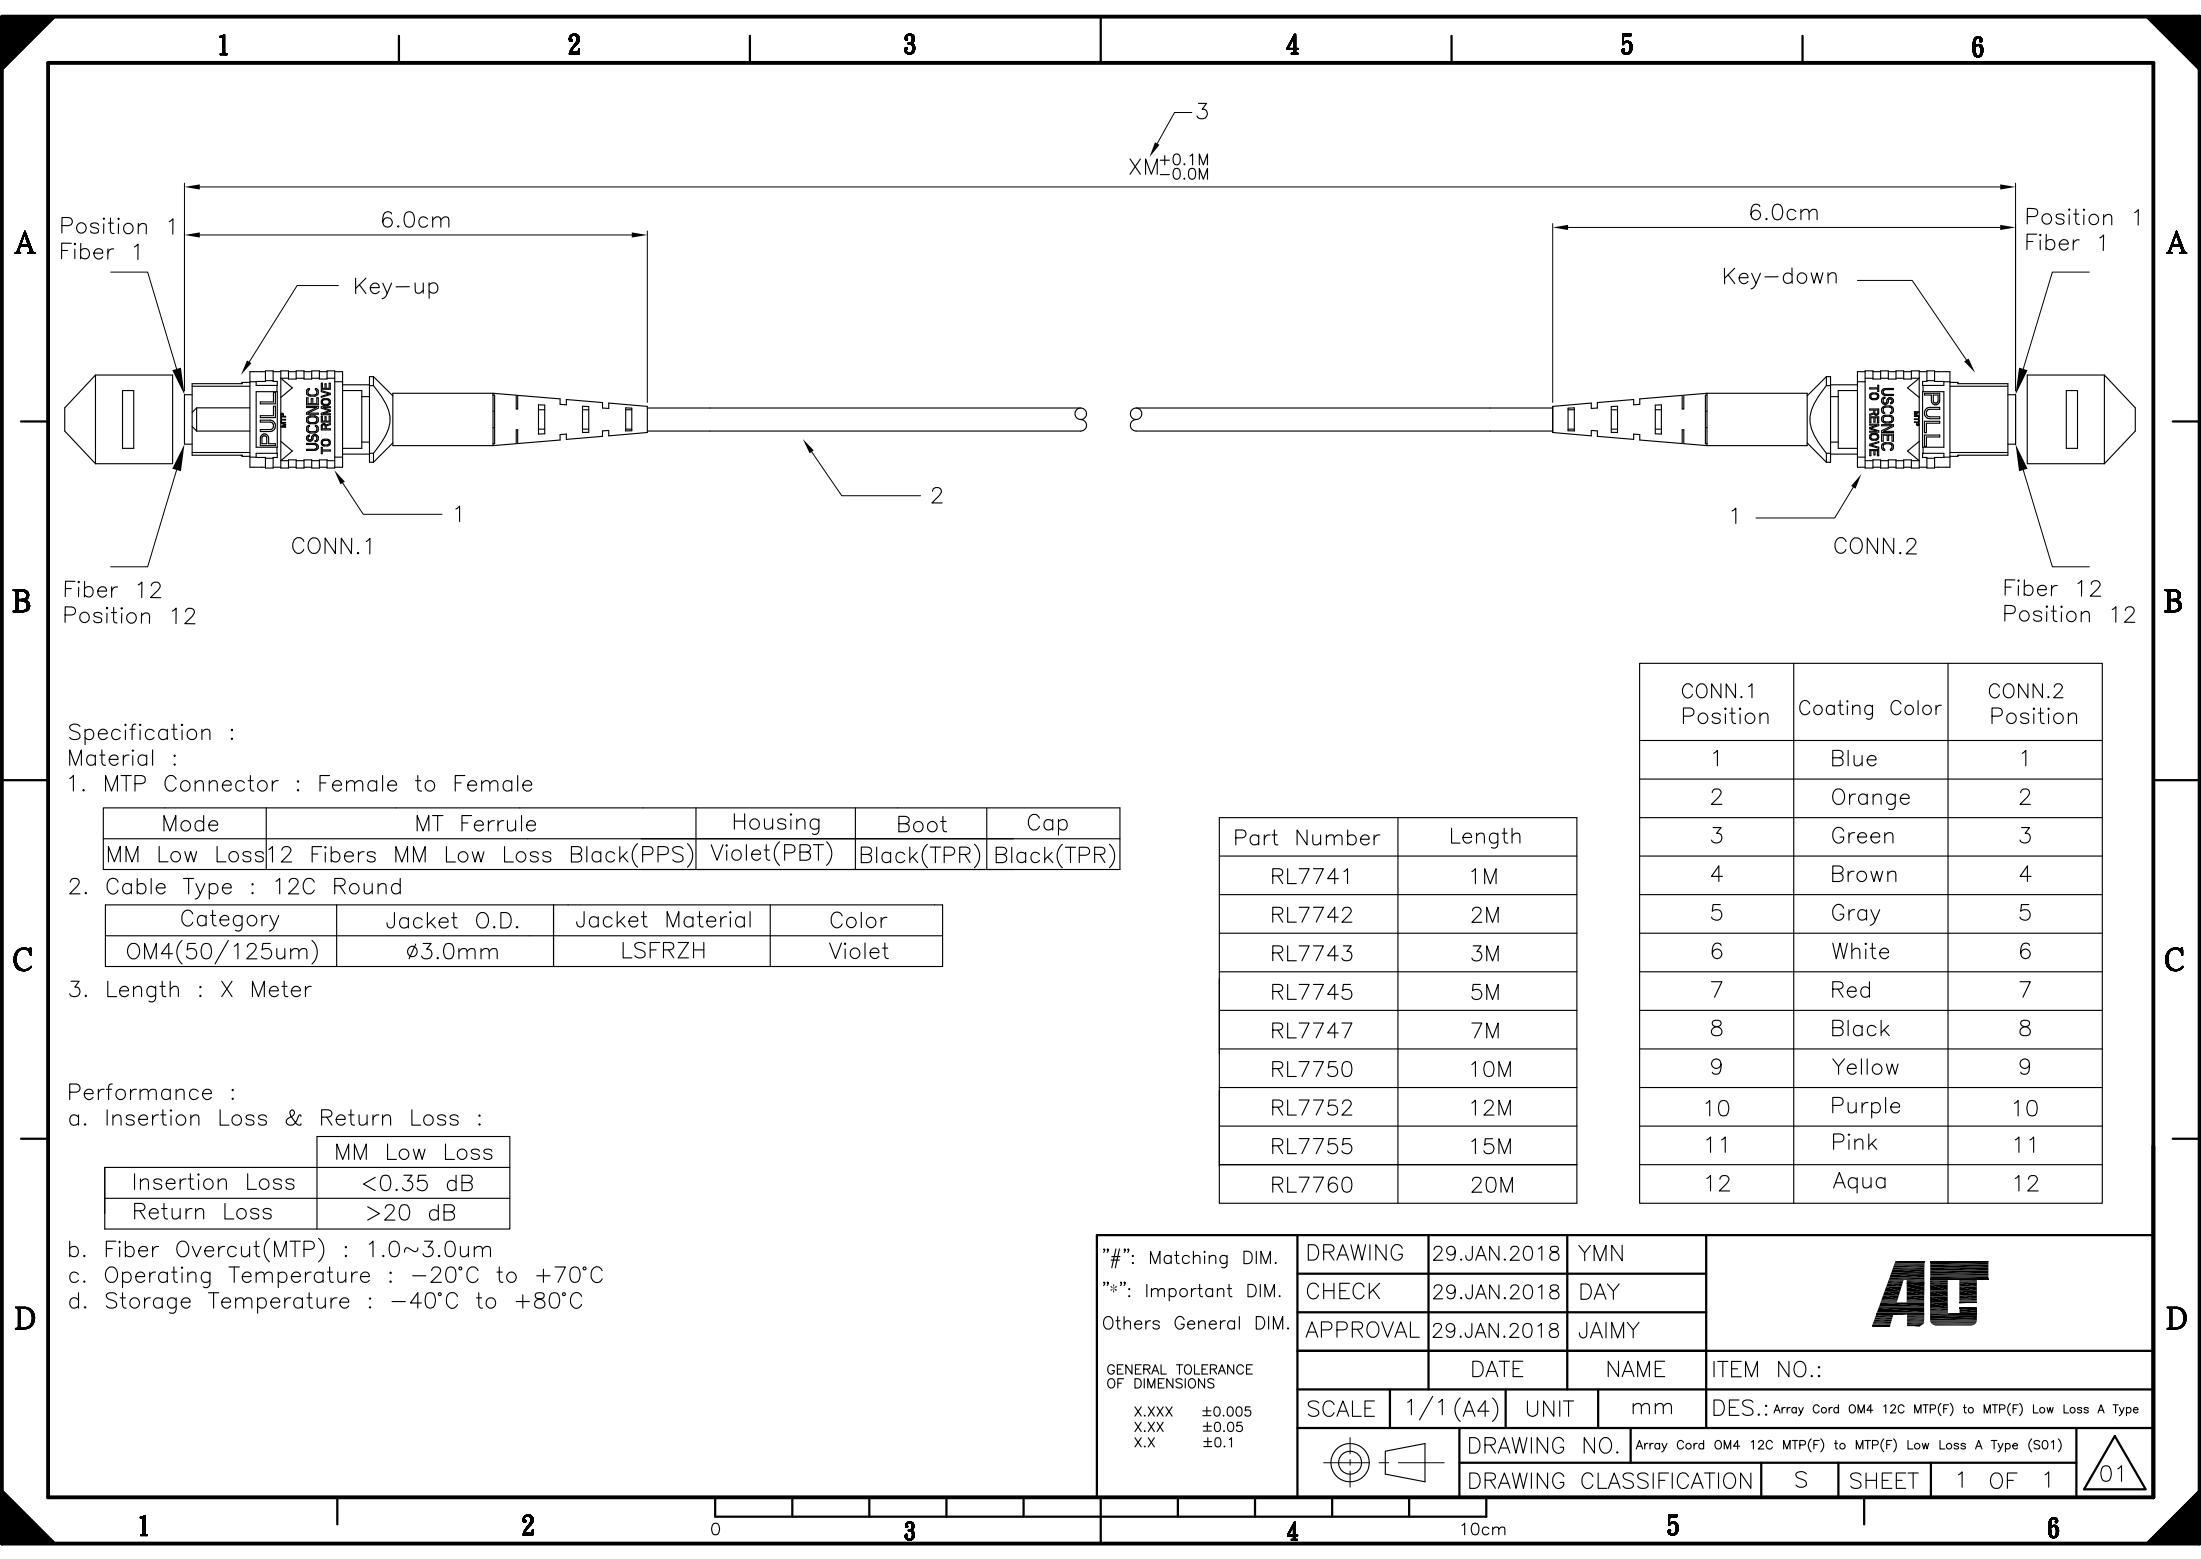

Specification :
Material :
1. MTP Connector : Female to Female

Mode	MT Ferrule	Housing	Boot	Cap
MM Low Loss	12 Fibers MM Low Loss Black(PPS)	Violet(PBT)	Black(TPR)	Black(TPR)

2. Cable Type : 12C Round

Category	Jacket O.D.	Jacket Material	Color
OM4(50/125um)	ø3.0mm	LSFRZH	Violet

3. Length : X Meter

Performance :
a. Insertion Loss & Return Loss :

	MM Low Loss
Insertion Loss	<0.35 dB
Return Loss	>20 dB

b. Fiber Overcut(MTP) : 1.0~3.0um
c. Operating Temperature : -20°C to +70°C
d. Storage Temperature : -40°C to +80°C

Part Number	Length
RL7741	1M
RL7742	2M
RL7743	3M
RL7745	5M
RL7747	7M
RL7750	10M
RL7752	12M
RL7755	15M
RL7760	20M

CONN.1 Position	Coating Color	CONN.2 Position
1	Blue	1
2	Orange	2
3	Green	3
4	Brown	4
5	Gray	5
6	White	6
7	Red	7
8	Black	8
9	Yellow	9
10	Purple	10
11	Pink	11
12	Aqua	12

#: Matching DIM. *: Important DIM. Others General DIM.	DRAWING	29.JAN.2018	YMN		
	CHECK	29.JAN.2018	DAY		
	APPROVAL	29.JAN.2018	JAIMY		
	DATE		NAME	ITEM NO.:	
SCALE		1/1 (A4)	UNIT	mm	DES.: Array Cord OM4 12C MTP(F) to MTP(F) Low Loss A Type
		DRAWING NO.			Array Cord OM4 12C MTP(F) to MTP(F) Low Loss A Type (S01)
		DRAWING CLASSIFICATION			S SHEET 1 OF 1
GENERAL TOLERANCE OF DIMENSIONS					
X.XXX ±0.005					
X.XX ±0.05					
X.X ±0.1					
					01