


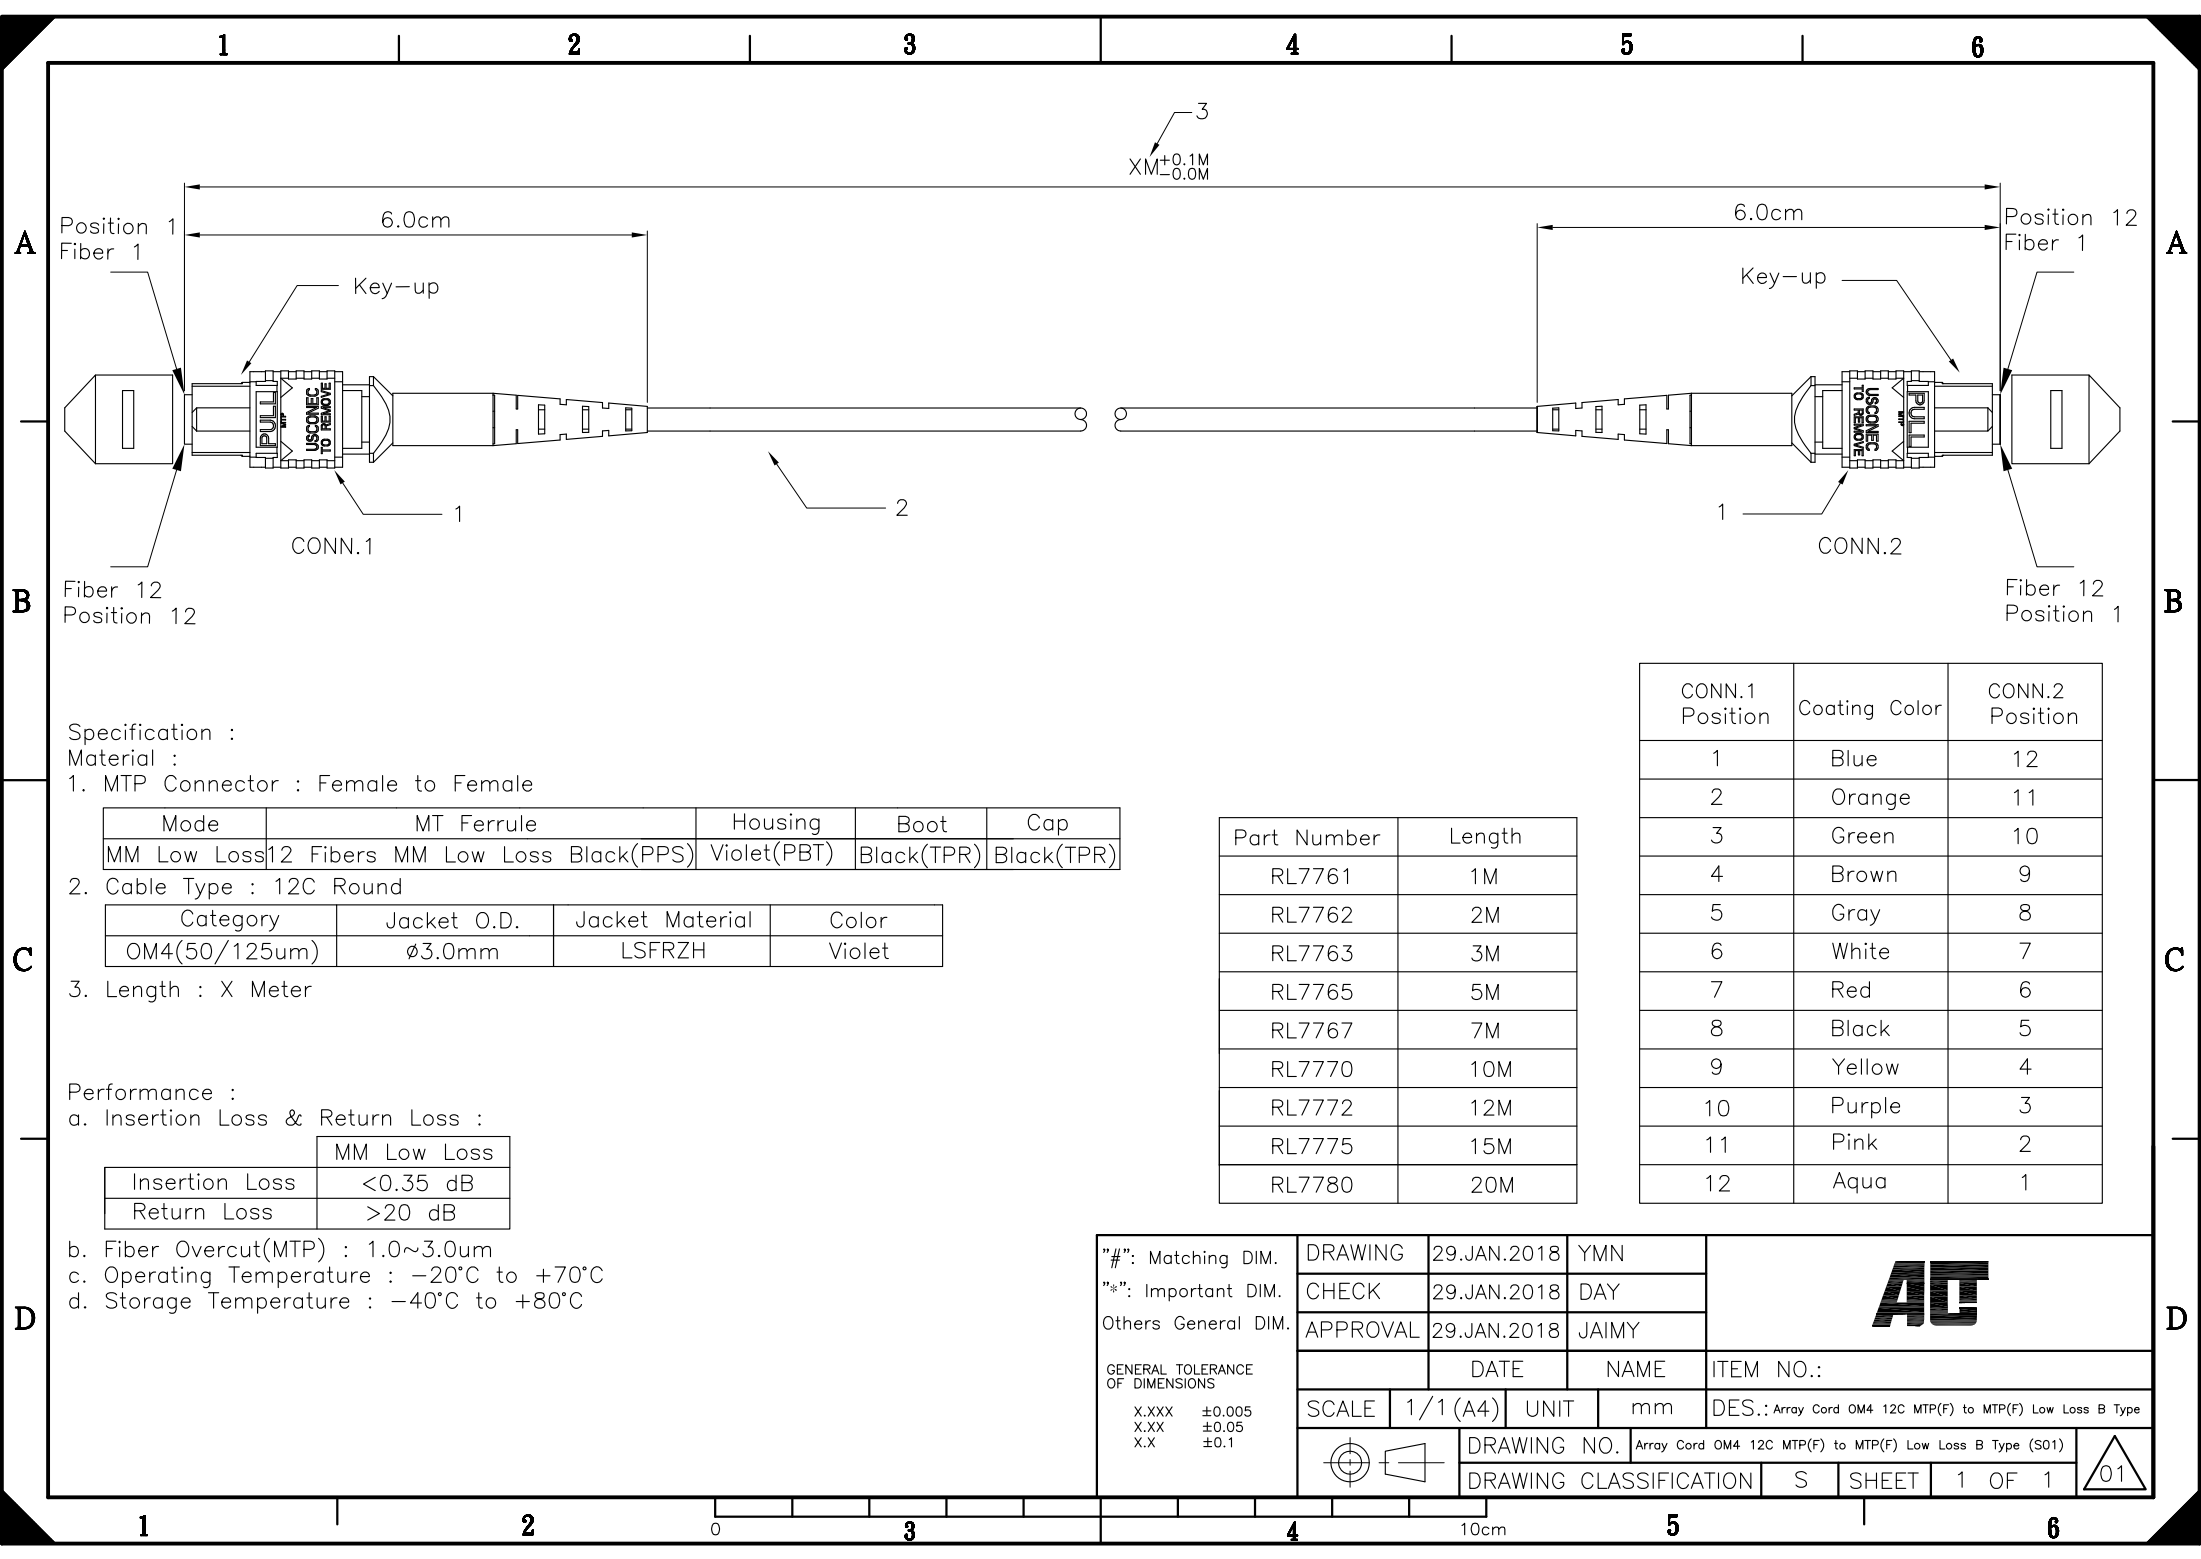

Specification :
Material :
1. MTP Connector : Female to Female

Mode	MT Ferrule	Housing	Boot	Cap
MM Low Loss	12 Fibers MM Low Loss Black(PPS)	Violet(PBT)	Black(TPR)	Black(TPR)

2. Cable Type : 12C Round

Category	Jacket O.D.	Jacket Material	Color
OM4(50/125um)	ø3.0mm	LSFRZH	Violet

3. Length : X Meter


Performance :
a. Insertion Loss & Return Loss :

	MM Low Loss
Insertion Loss	<0.35 dB
Return Loss	>20 dB

b. Fiber Overcut(MTP) : 1.0~3.0um
c. Operating Temperature : -20°C to +70°C
d. Storage Temperature : -40°C to +80°C

Part Number	Length
RL7761	1M
RL7762	2M
RL7763	3M
RL7765	5M
RL7767	7M
RL7770	10M
RL7772	12M
RL7775	15M
RL7780	20M

CONN.1 Position	Coating Color	CONN.2 Position
1	Blue	12
2	Orange	11
3	Green	10
4	Brown	9
5	Gray	8
6	White	7
7	Red	6
8	Black	5
9	Yellow	4
10	Purple	3
11	Pink	2
12	Aqua	1

#": Matching DIM. ": Important DIM. Others General DIM.	DRAWING		29.JAN.2018		YMN					
	CHECK		29.JAN.2018		DAY					
	APPROVAL		29.JAN.2018		JAIMY					
GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1			DATE		NAME		ITEM NO.:			
	SCALE	1/1 (A4)		UNIT	mm		DES.: Array Cord OM4 12C MTP(F) to MTP(F) Low Loss B Type			
			DRAWING NO.		Array Cord OM4 12C MTP(F) to MTP(F) Low Loss B Type (S01)					
			DRAWING CLASSIFICATION			S	SHEET	1 OF 1		