




REV.	REVISION	DATE

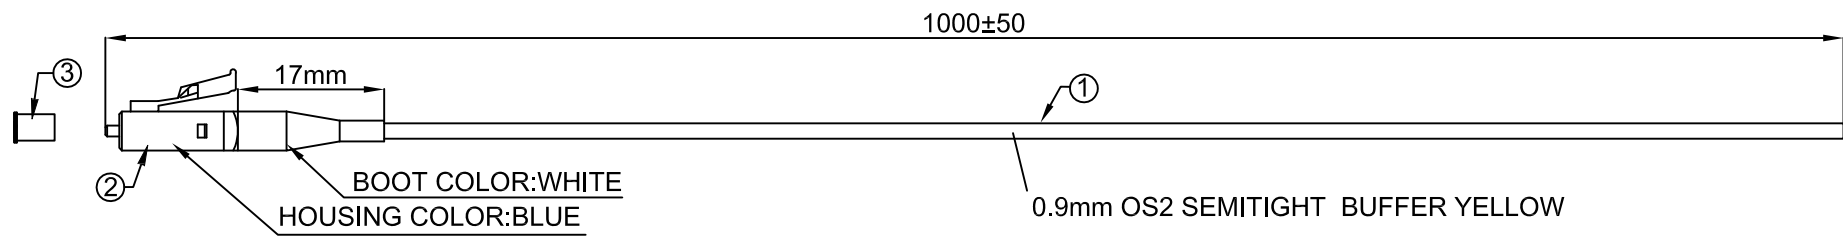

LC/UPC SM CONNECTOR

Remark:

1.Insertion Loss Typical:0.10 dB

Insertion Loss Max.: 0.20dB

2.Return Loss Min.:55dB


3.3D of UPC

Radius of Curvature:7~12mm

Vertex Offset:0um~40um

Fiber Height Spherical:-30nm~30nm

4.Fiber Type:R15 G657.A1 (Sumitomo)

CUSTOMER APPROVAL:			DATE:		
AC					
		UNIT: mm	TITLE: PIGTAIL LCUPC SINGLEMODE SIMPLEX OS2, 0.9mm SEMITIGHT BUFFER PVC YELLOW.		
DRAWN BY Vernon		DATE 2017.04.12			
CHECKED BY Wale		DATE 2017.04.12	CUSTOMER	CUSTOMER PART NO.	
APPROVED BY David		DATE 2017.04.12	DRAWING NO.	Ref. NO. RL9995	REV. C
SALE BY		DATE	TRENDEX PART NO.		

3	1PC		LC DUST COVER,WHITE.
2	1SET		CONNECTOR:LC/UPC SM,BLUE HOUSING WITH WHITE BOOT.
1	1PC		CABLE:SINGLEMODE,OS2,0.9mm SEMITIGHT BUFFER,PVC YELLOW .
ITEM	Q'TY	PART NO.	DESCRIPTION
PART LIST			