
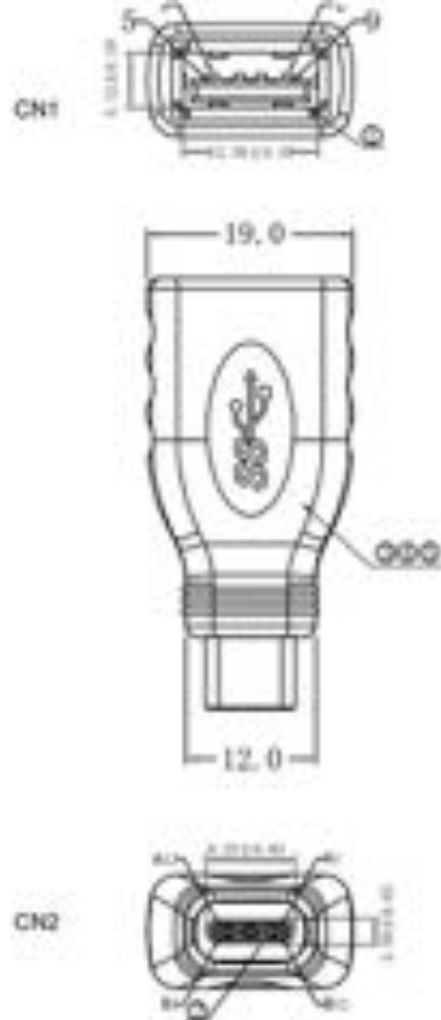


PIN CONNECTION

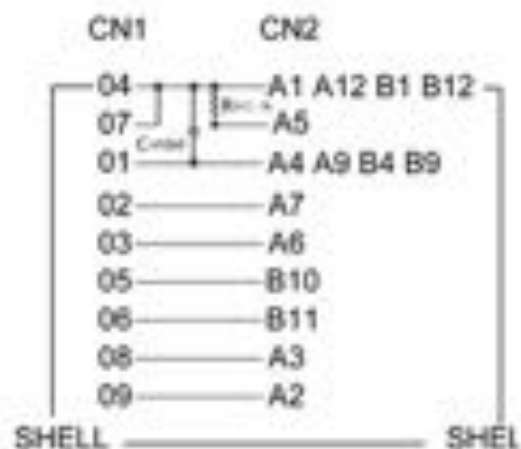

Mark:

- 1.100% open&short testing.
- 2.It supports charging,data transferring and OTG.
- 3.It used PCB connection,not Electronic wire.

1	Out-Mold	PVC,black	USB-13	4.8G
1	In-Mold	PE	USB-14	2.8G
1	In-Con	PCB,7x0.8mm,Rx5.5KΩ,Cx1Dnf	JH-001	1PCS
2	Connector	USB 3.1 Type C M,nickel-plated,gold pin	DT07015	1PCS
1	Connector	USB 3.0 AF,nickel-plated,blue rubber	DT06011	1PCS
NO	ITEM	Description	Item No	QTY

				USB 3.0 AF to Type C Adapter		
品名规格				单位	MM	
客户编号		版次		比例	NONE	
图纸编号	580037			日期		
核准			审核			制作