

# SPP1301010xx – SFP+ Dual Fibre

1310nm / 10km / 10x Gigabit Ethernet

For your product safety, please read the following information carefully before any manipulation of the transceiver:



## ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 / JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



## LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

The optical ports of the module need to be terminated with an optical connector or with a dust plug in order to avoid contamination.


## 1. Overview

SPP1301010xx is a high-performance transceiver module for up to 10x Gigabit Ethernet data links over a single mode fibre pair. The maximum reach<sup>1</sup> is 10 km, with 6.2 dB end of life (EOL) power budget. The transmitter is a 1310 nm DFB laser, the receiver is a PIN photodiode.

This transceiver module is compliant with the Small Form-factor Pluggable (SFP+) Multisource Agreement (MSA) and hot pluggable. Always contact SkyLane Optics® commercial agents for compatibility with different equipment platforms.

## 2. Features

- SFP+ Multi-Source Agreement compliant (SFF-8431)
- Hot pluggable SFP+ footprint
- Serial ID functionality supported according to (SFF-8472)
- Class 1 laser safety standard IEC 60825 compliant
- Dual LC connector
- 1310 nm DFB transmitter
- 10 km point-to-point transmission on single mode fibre
- Operating temperature range 0°C to 70°C or -40°C to 85°C
- Low power dissipation (< 1W)
- Digital diagnostics monitoring (DDM)

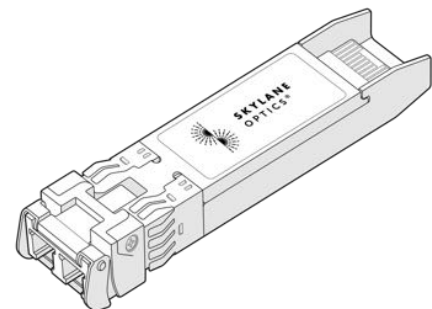

**Figure 1. SFP+ Dual Fiber**  
(non-binding illustration)

## 3. Applications

- 10x Gigabit Ethernet
- 9.83 Gbps CPRI
- 8x Fiber Channel
- 4x Fiber Channel
- 2x Fiber Channel

## 4. Optical Interface

P/N	Wavelength [nm]	Optical Output Power <sup>2</sup> [dBm]	Receiver Sensitivity <sup>3</sup> [dBm]	Dispersion Penalty [dB]	Receiver Overload <sup>4</sup> [dBm]	Power Budget <sup>2</sup> [dB]
<b>SPP1301010xx</b>	1310	-8.2 to 0.5	≤ -14.4	3.2	0	≥ 6.2

1. Distance is estimated assuming typical optical losses after decent quality fibre deployment; Only optical budget value is guaranteed.

2. EOL, over operating temperature range

3. Measured at 10.3125Gbps, PRBS 2<sup>31</sup>-1, BER≤10<sup>-12</sup>

4. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers (optical loop back) before ensuring that proper optical attenuation is used

## 5. Technical Parameters

### 5.1. Recommended Operating Conditions

Parameter	Min	Typ	Max	Unit	Notes
Storage temperature	-40		85	°C	
Operating Case Temperature	0		70	°C	SPP13010100D, SPP13010100B, SPP1301010GD, SPP1301010AD
	-40		85	°C	SPP13010102D, SPP13010102B
Relative Humidity	5		95	%	Non condensing
Power Supply Voltage	3.15	3.3	3.45	V	
Power Supply Current			300	mA	

### 5.2. Transmitter Optical Specifications

Parameter	Min	Typ	Max	Unit	Notes
Average Output Power	-8.2		0.5	dBm	5
Centre Wavelength	1270	1310	1355	nm	
Spectral Width (-20dB)			1	nm	
Extinction Ratio	3.5			dB	
Dispersion Penalty			3.2	dB	

5. Output power coupled into a 9/125 µm single-mode fibre

### 5.3. Receiver Optical Specifications

Parameter	Min	Typ	Max	Unit	Notes
Receiver Sensitivity			-14.4	dBm	6
Receiver Overload	0			dBm	6
Receiver Operating Range	1260		1565	nm	

6. Measured with 10.3125Gbps PRBS 2<sup>31</sup>-1, BER≤10<sup>-12</sup>

## 6. Transceiver Electrical Pad Layout

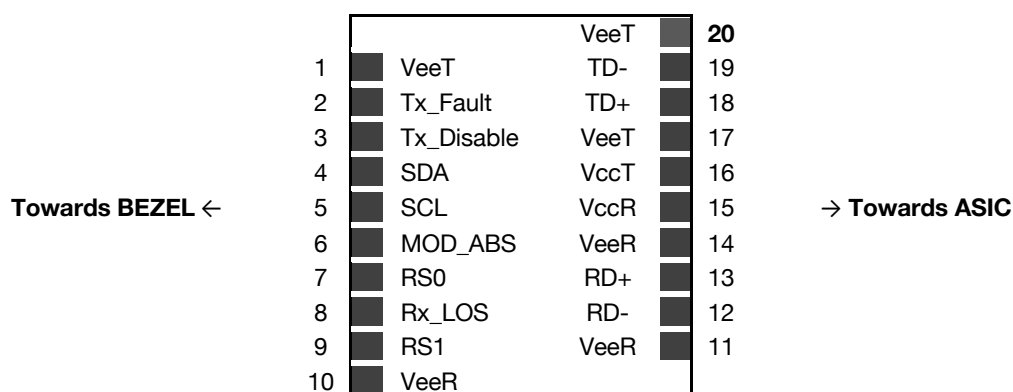


Figure 2. Transceiver Electrical Pad Layout

## 7. Module Electrical Pin Definition



## SFP+ MSA (SFF-8431)

Pin Number	Name	Function
1	VeeT	Module Transmitter Ground
2	Tx_Fault	Module Transmitter Fault
3	Tx_Disable	Transmitter Disable
4	SDA	2-Wire Serial Interface Data
5	SCL	2-Wire Serial Interface Clock
6	Mod_ABS	Module Absent
7	RS0	Not Used
8	Rx_LOS	Receiver Loss of Signal
9	RS1	Not Used
10	VeeR	Module Receiver Ground
11	VeeR	Module Receiver Ground
12	RD-	Receiver Inverted Data Output
13	RD+	Receiver Non-Inverted Data Output
14	VeeR	Module Receiver Ground
15	VccR	Module Receiver 3.3V Supply
16	VccT	Module Transmitter 3.3V Supply
17	VeeT	Module Transmitter Ground
18	TD+	Transmitter Non-Inverted Data Input
19	TD-	Transmitter Inverted Data Input
20	VeeT	Module Transmitter Ground

## 8. EEPROM

### SFP+ MSA (SFF-8472)

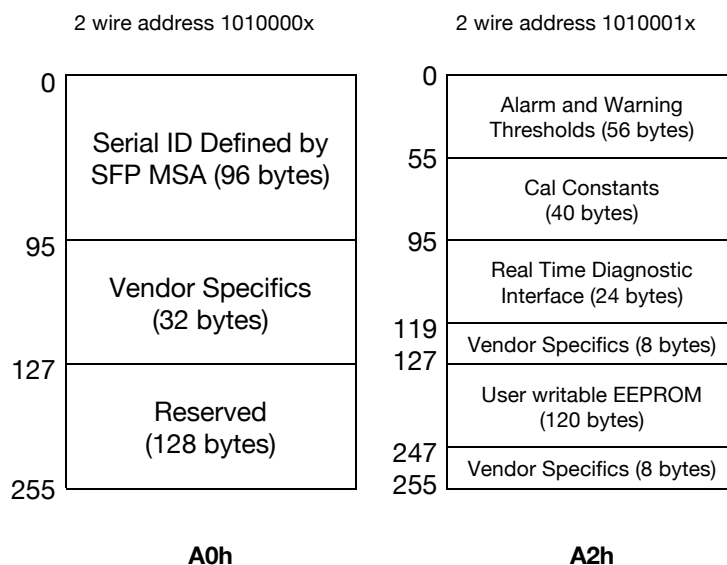


Figure 3. EEPROM of a SFP+

## 9. Ordering Information

Part Number	Description
<b>SPP13010100D</b>	SFP+ Dual Fibre, Tx 1310 nm (DFB), Rx (PIN), maximum distance 10 km, power budget 6.2 dB, 10x Gigabit Ethernet, LC connector, <b>0°C to 70°C</b> , DDM
<b>SPP13010100B</b>	SFP+ Dual Fibre, Tx 1310 nm (DFB), Rx (PIN), maximum distance 10 km, power budget 6.2 dB, 10x Gigabit Ethernet, LC connector, <b>Gen B, 0°C to 70°C</b> , DDM
<b>SPP13010102D</b>	SFP+ Dual Fibre, Tx 1310 nm (DFB), Rx (PIN), maximum distance 10 km, power budget 6.2 dB, 10x Gigabit Ethernet, LC connector, <b>-40°C to 85°C</b> , DDM
<b>SPP13010102B</b>	SFP+ Dual Fibre, Tx 1310 nm (DFB), Rx (PIN), maximum distance 10 km, power budget 6.2 dB, 10x Gigabit Ethernet, LC connector, <b>Gen B, -40°C to 85°C</b> , DDM
<b>SPP1301010GD</b>	SFP+ Dual Fibre, Tx 1310 nm (DFB), Rx (PIN), maximum distance 10 km, power budget 6.2 dB, 10x Gigabit Ethernet, LC connector, <b>0°C to 70°C</b> , DDM, Specific Firmware
<b>SPP1301010AD</b>	SFP+ Dual Fibre, Tx 1310 nm (DFB), Rx (PIN), maximum distance 10 km, power budget 6.2 dB, 10x Gigabit Ethernet, LC connector, <b>0°C to 70°C</b> , DDM, Specific Firmware

## 10. Document Revision Information

Revision	Description
<b>A</b>	Initial release
<b>B</b>	Specification updated to include 8x Fiber Channel compatibility
<b>C</b>	Ordering information table updated with the “G” and “A” versions
<b>D</b>	Specification updated to include CPRI compatibility
<b>E</b>	Gen B variants added

Skylane Optics® supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact:  
**support@skylaneoptics.com**

**Beyond  
Quality**

**Reliable  
Alliance**

**Performing  
Smartly**