

REV	DATE	MODIFICATION	DRAWN
	25/12/09		

SPECIFICATIONS

1.ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.

DIELECTRIC WITHSTANDING VOLTAGE : 500 VOLTS AC.

INSULATION RESISTANCE: 100 M Ω .

TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.

2.MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH : 20POUND MIN.

DURABILITY : 200 MATING CYCLES.

3.MATERIAL & FINISH:

HOUSING: POLYCARBONATE, UL94V-2 OR UL94V-0.

COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.

CONTACT BLADE: COPPER ALLOY.

CONDUCTOR : STRANDED & SOLID WIRE , 24AWG, 26 AWG.


GOLD PLATING: 3u"-50u",ARE AVAILABLE.

Round

Flat



DIMENSION IN mm (inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL PC	DWG NO. TD108R
.X $\pm$ 0.20	.X $\pm$ 5°	TITLE	
.XX $\pm$ 0.10	.XX $\pm$ 2°		
APPROVAL 沈红波	CHECKED 钟均江	DRAWN LiJing	SCALE 2/1 SHEET 1/1 PROJ. REV A

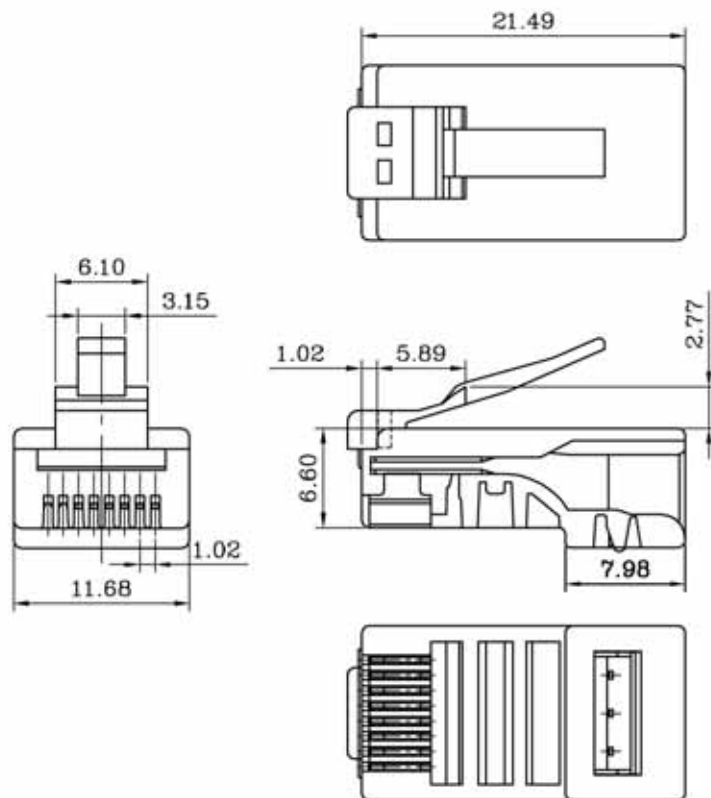

BLADE:	E				
Drawing			CABLE TYPE	ROUND	
Mark	✓		Mark	✓	
GOLD PLATING					
Mark					✓