



EASY RJ45 Plug Crimping Tool


Installation Instructions

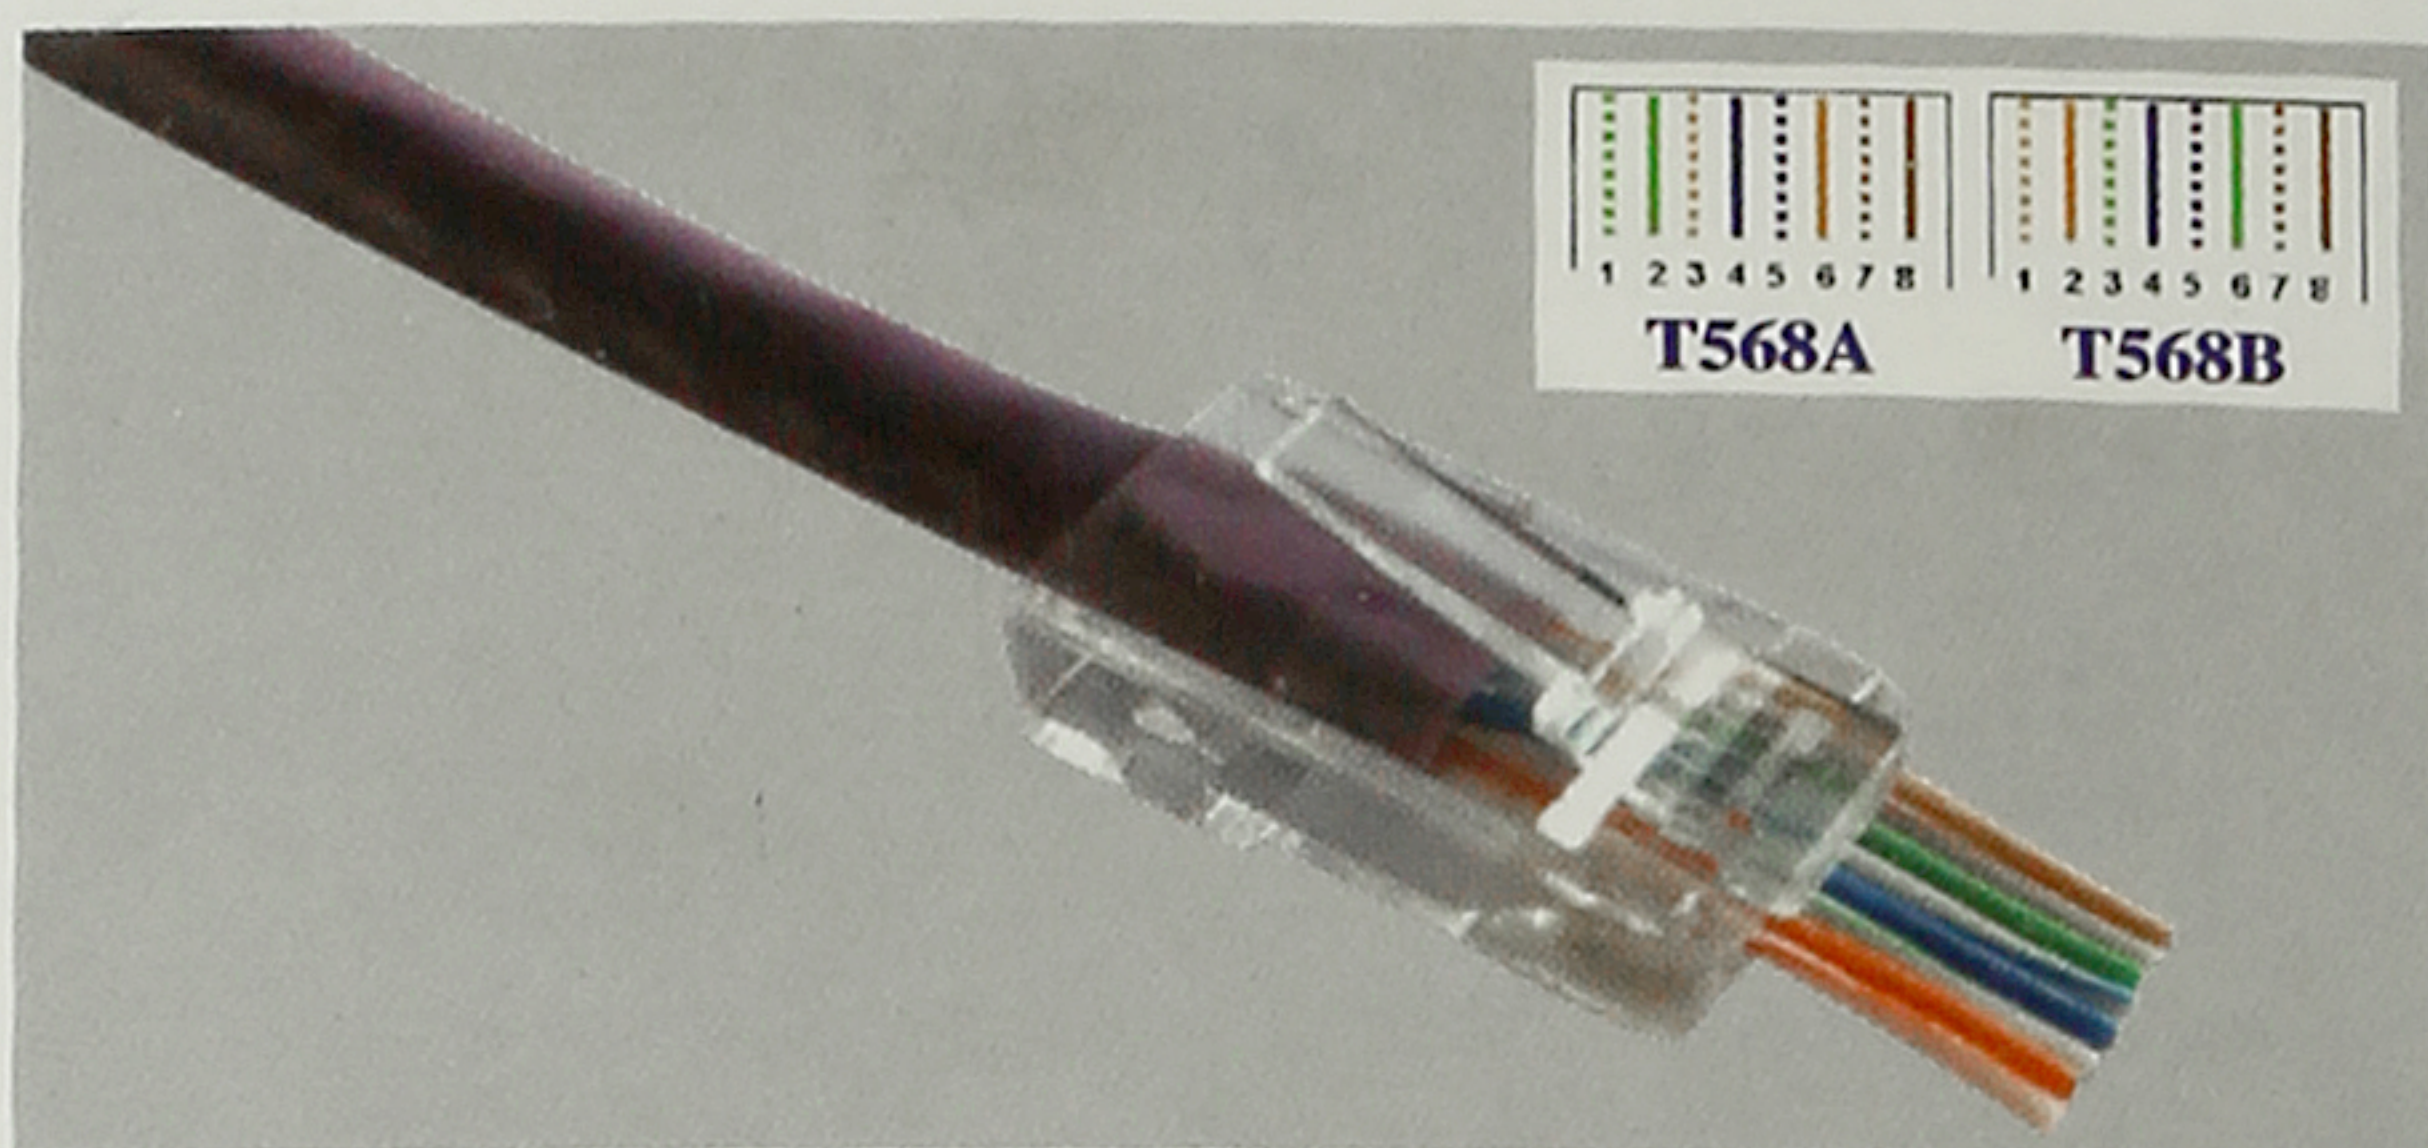

1.Assemble the cable with EASY RJ45 plug. (wiremap 568A/568B)

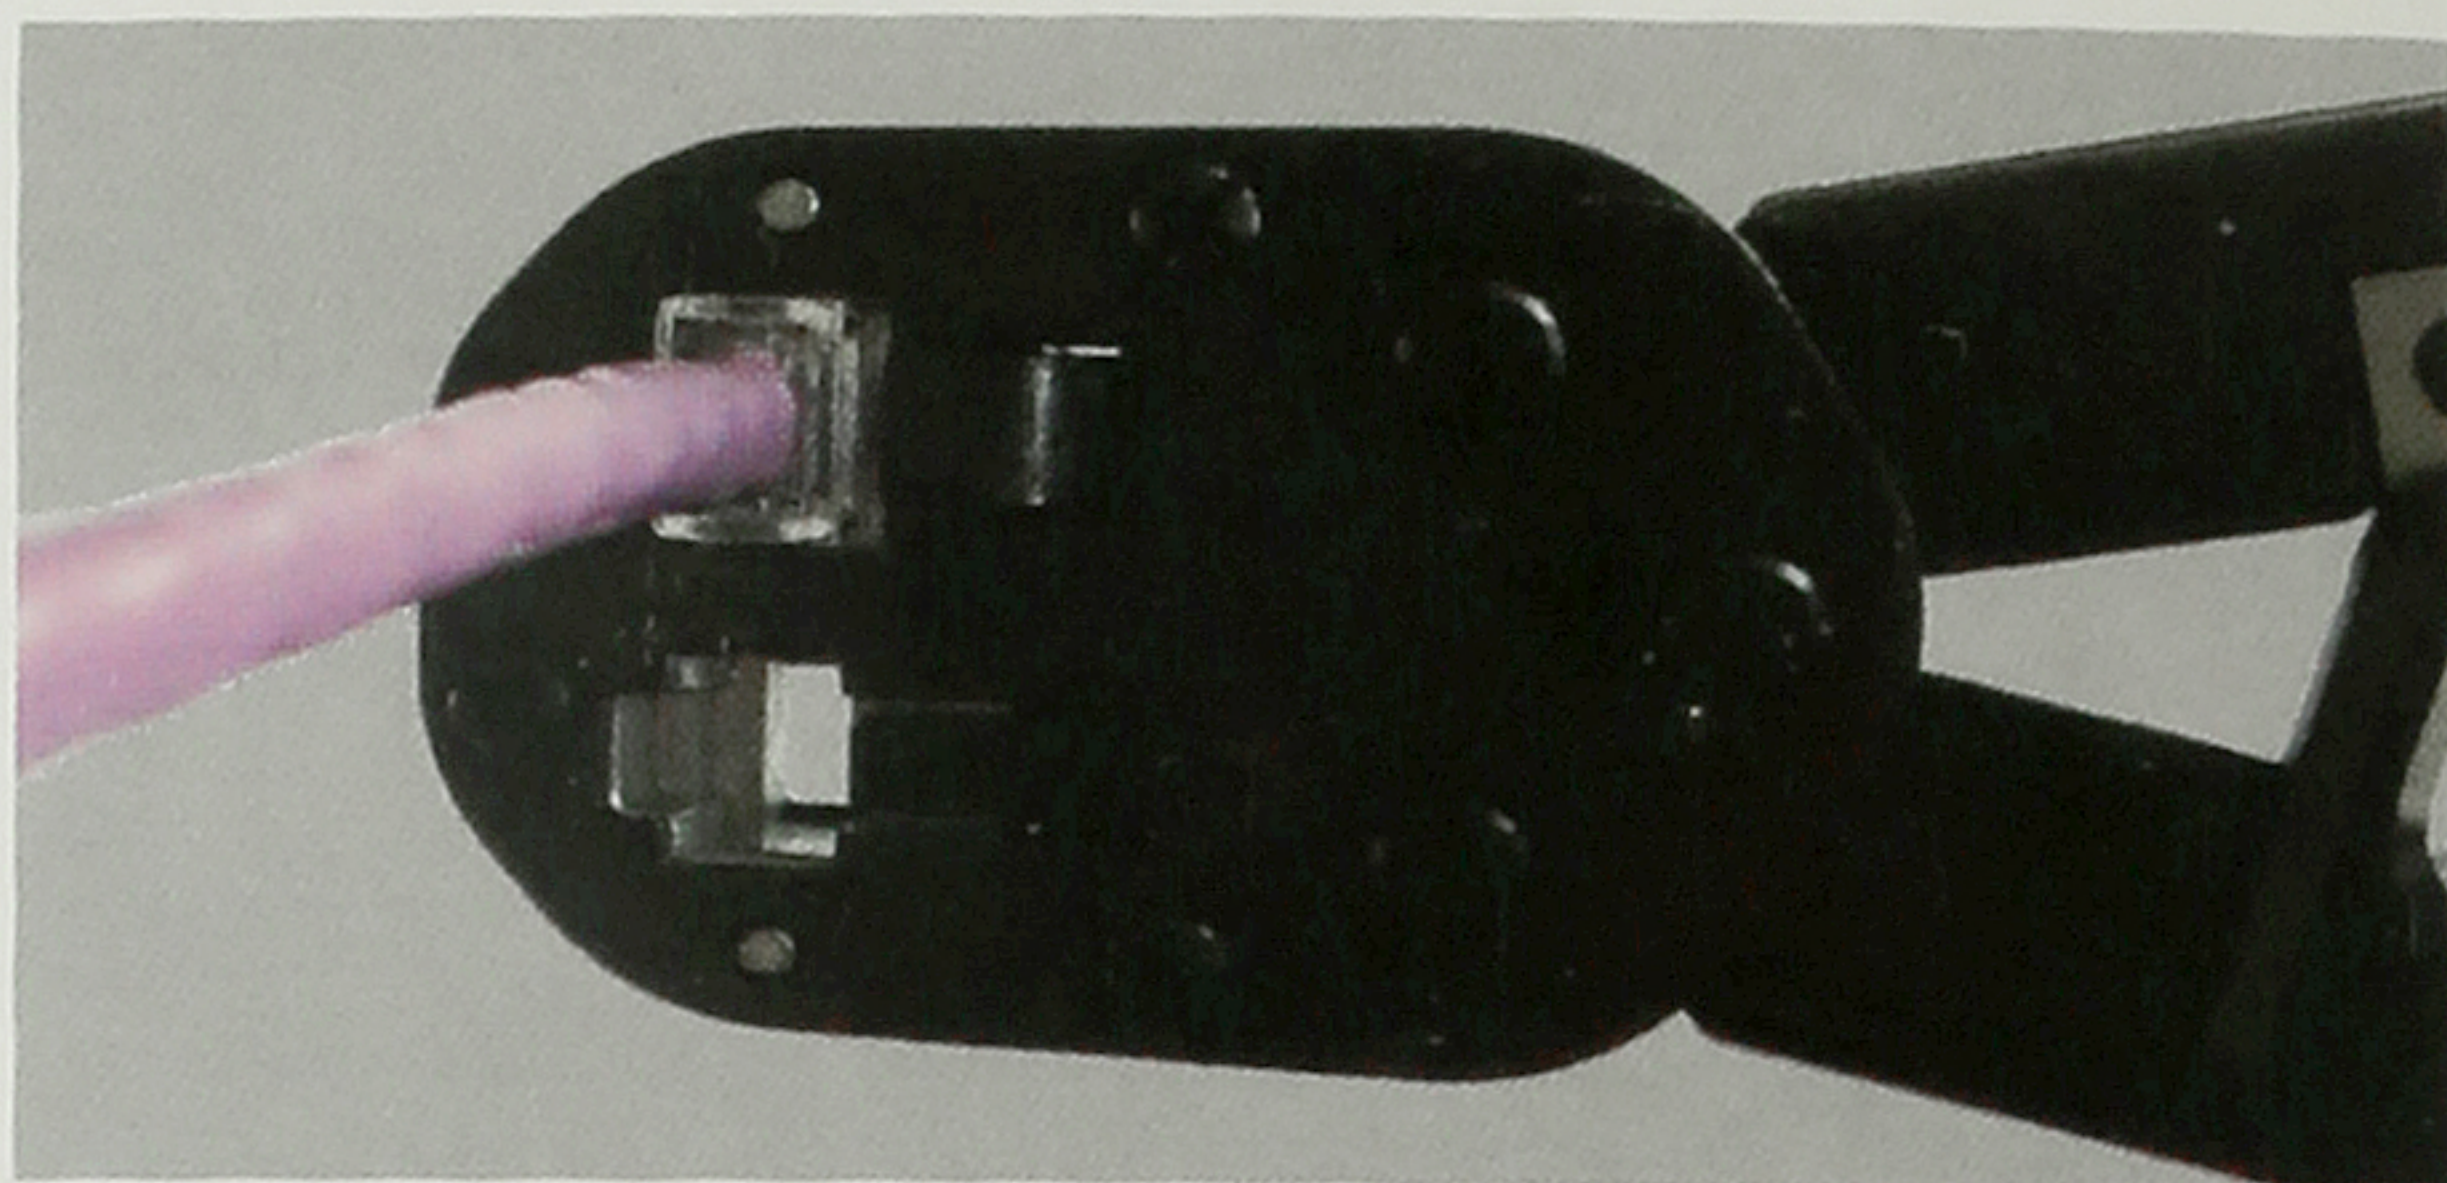


2.Insert the plug into the correct position of the crimping tool.

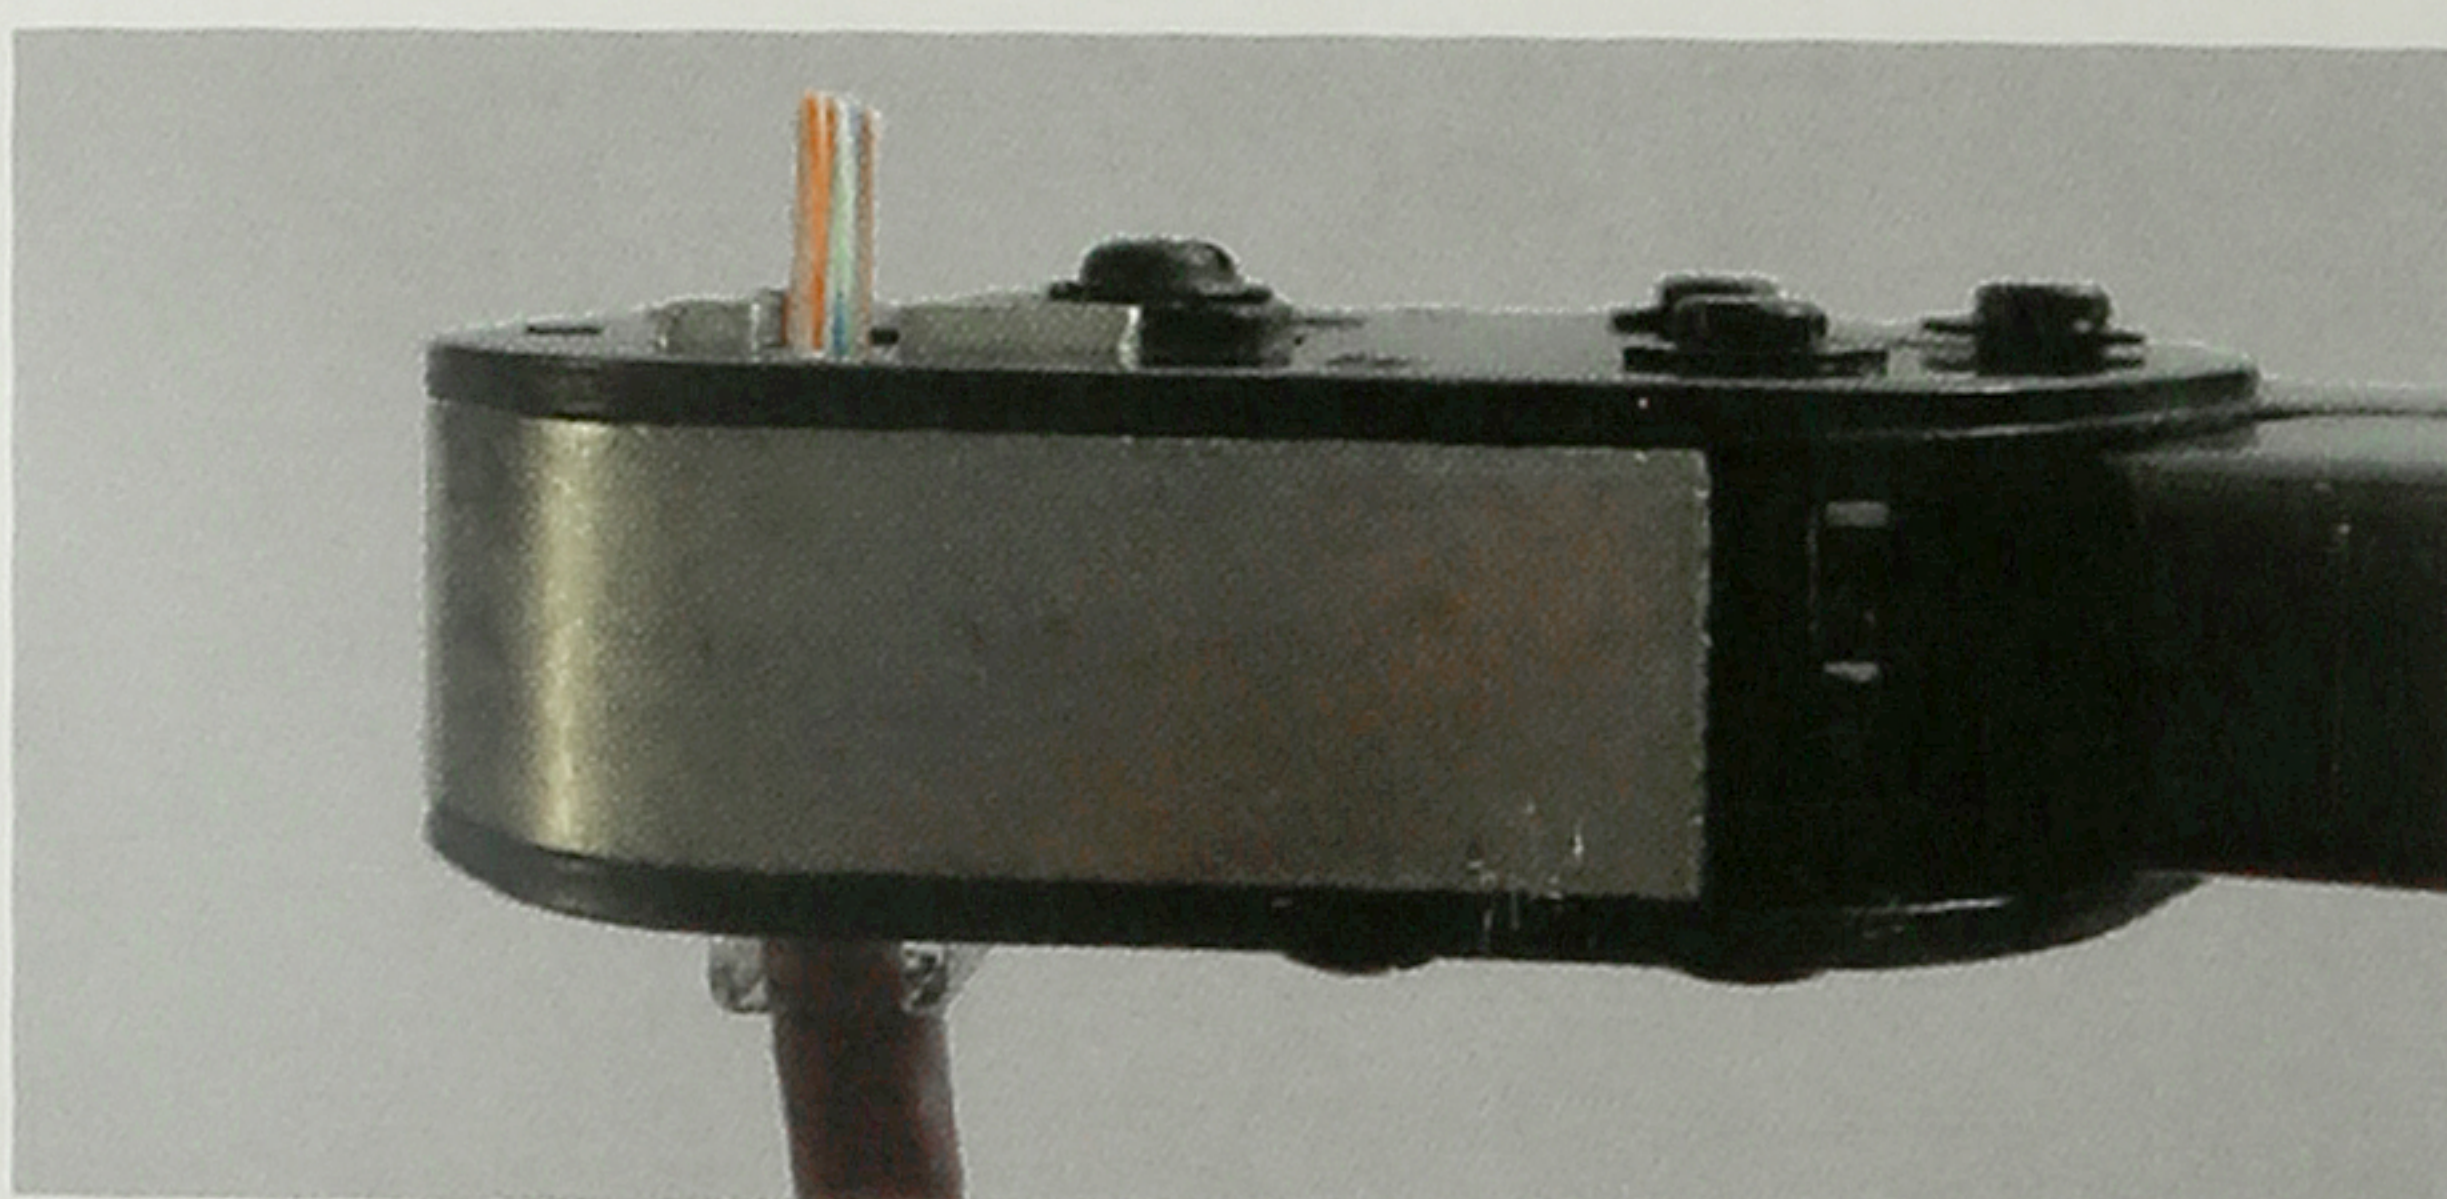


3.Make sure the plug is inserted completely.




4.Squeeze the tool and cut the wires.

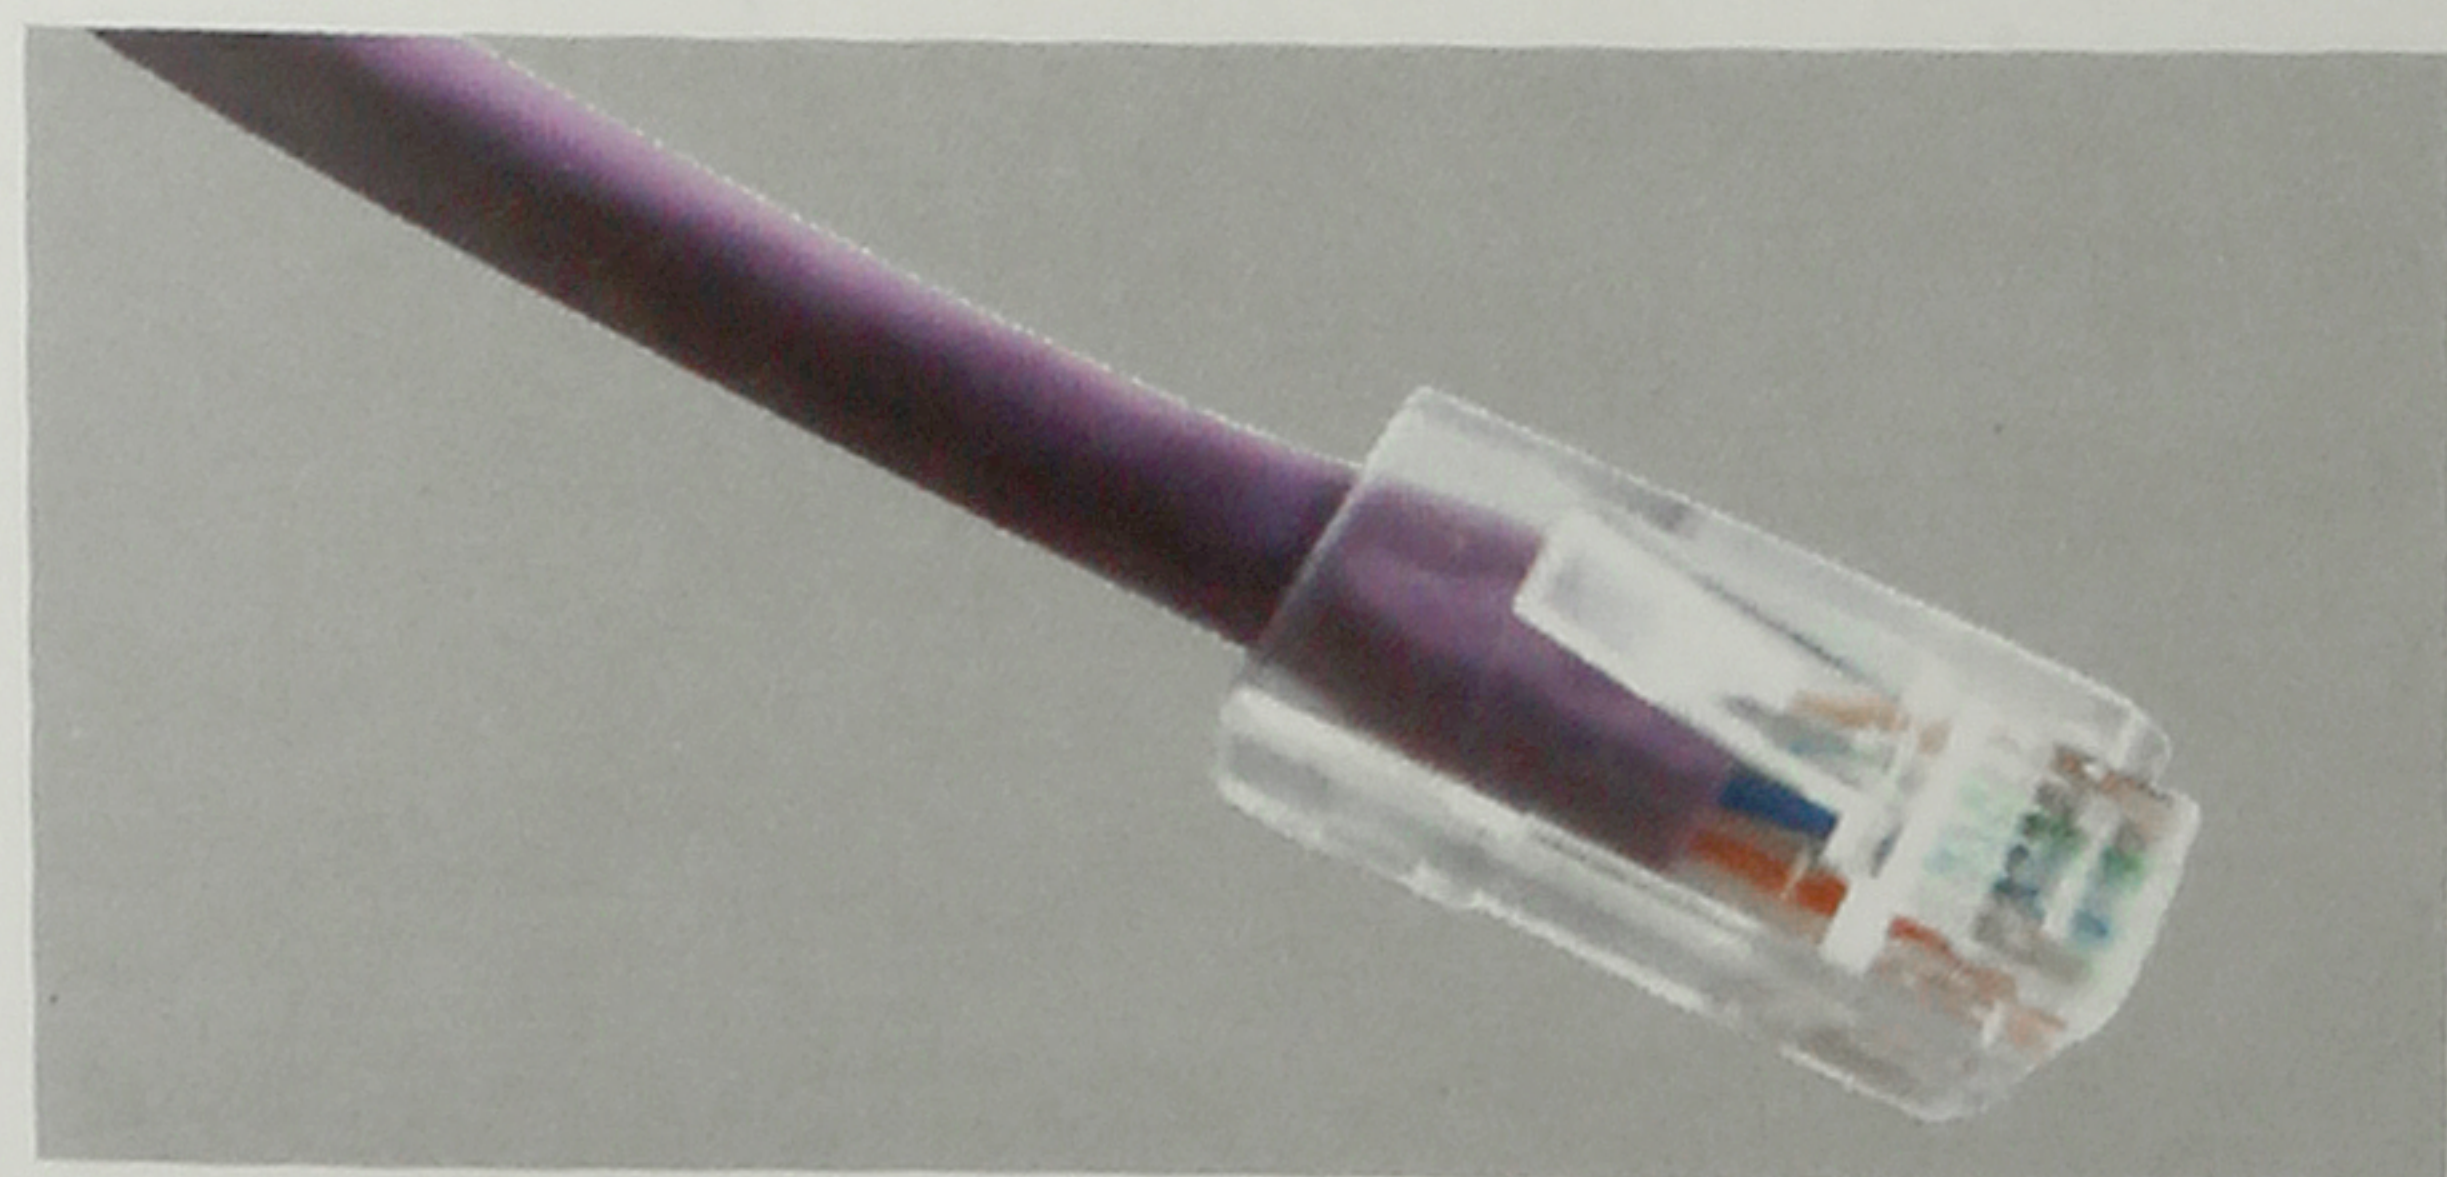

5.Completion.

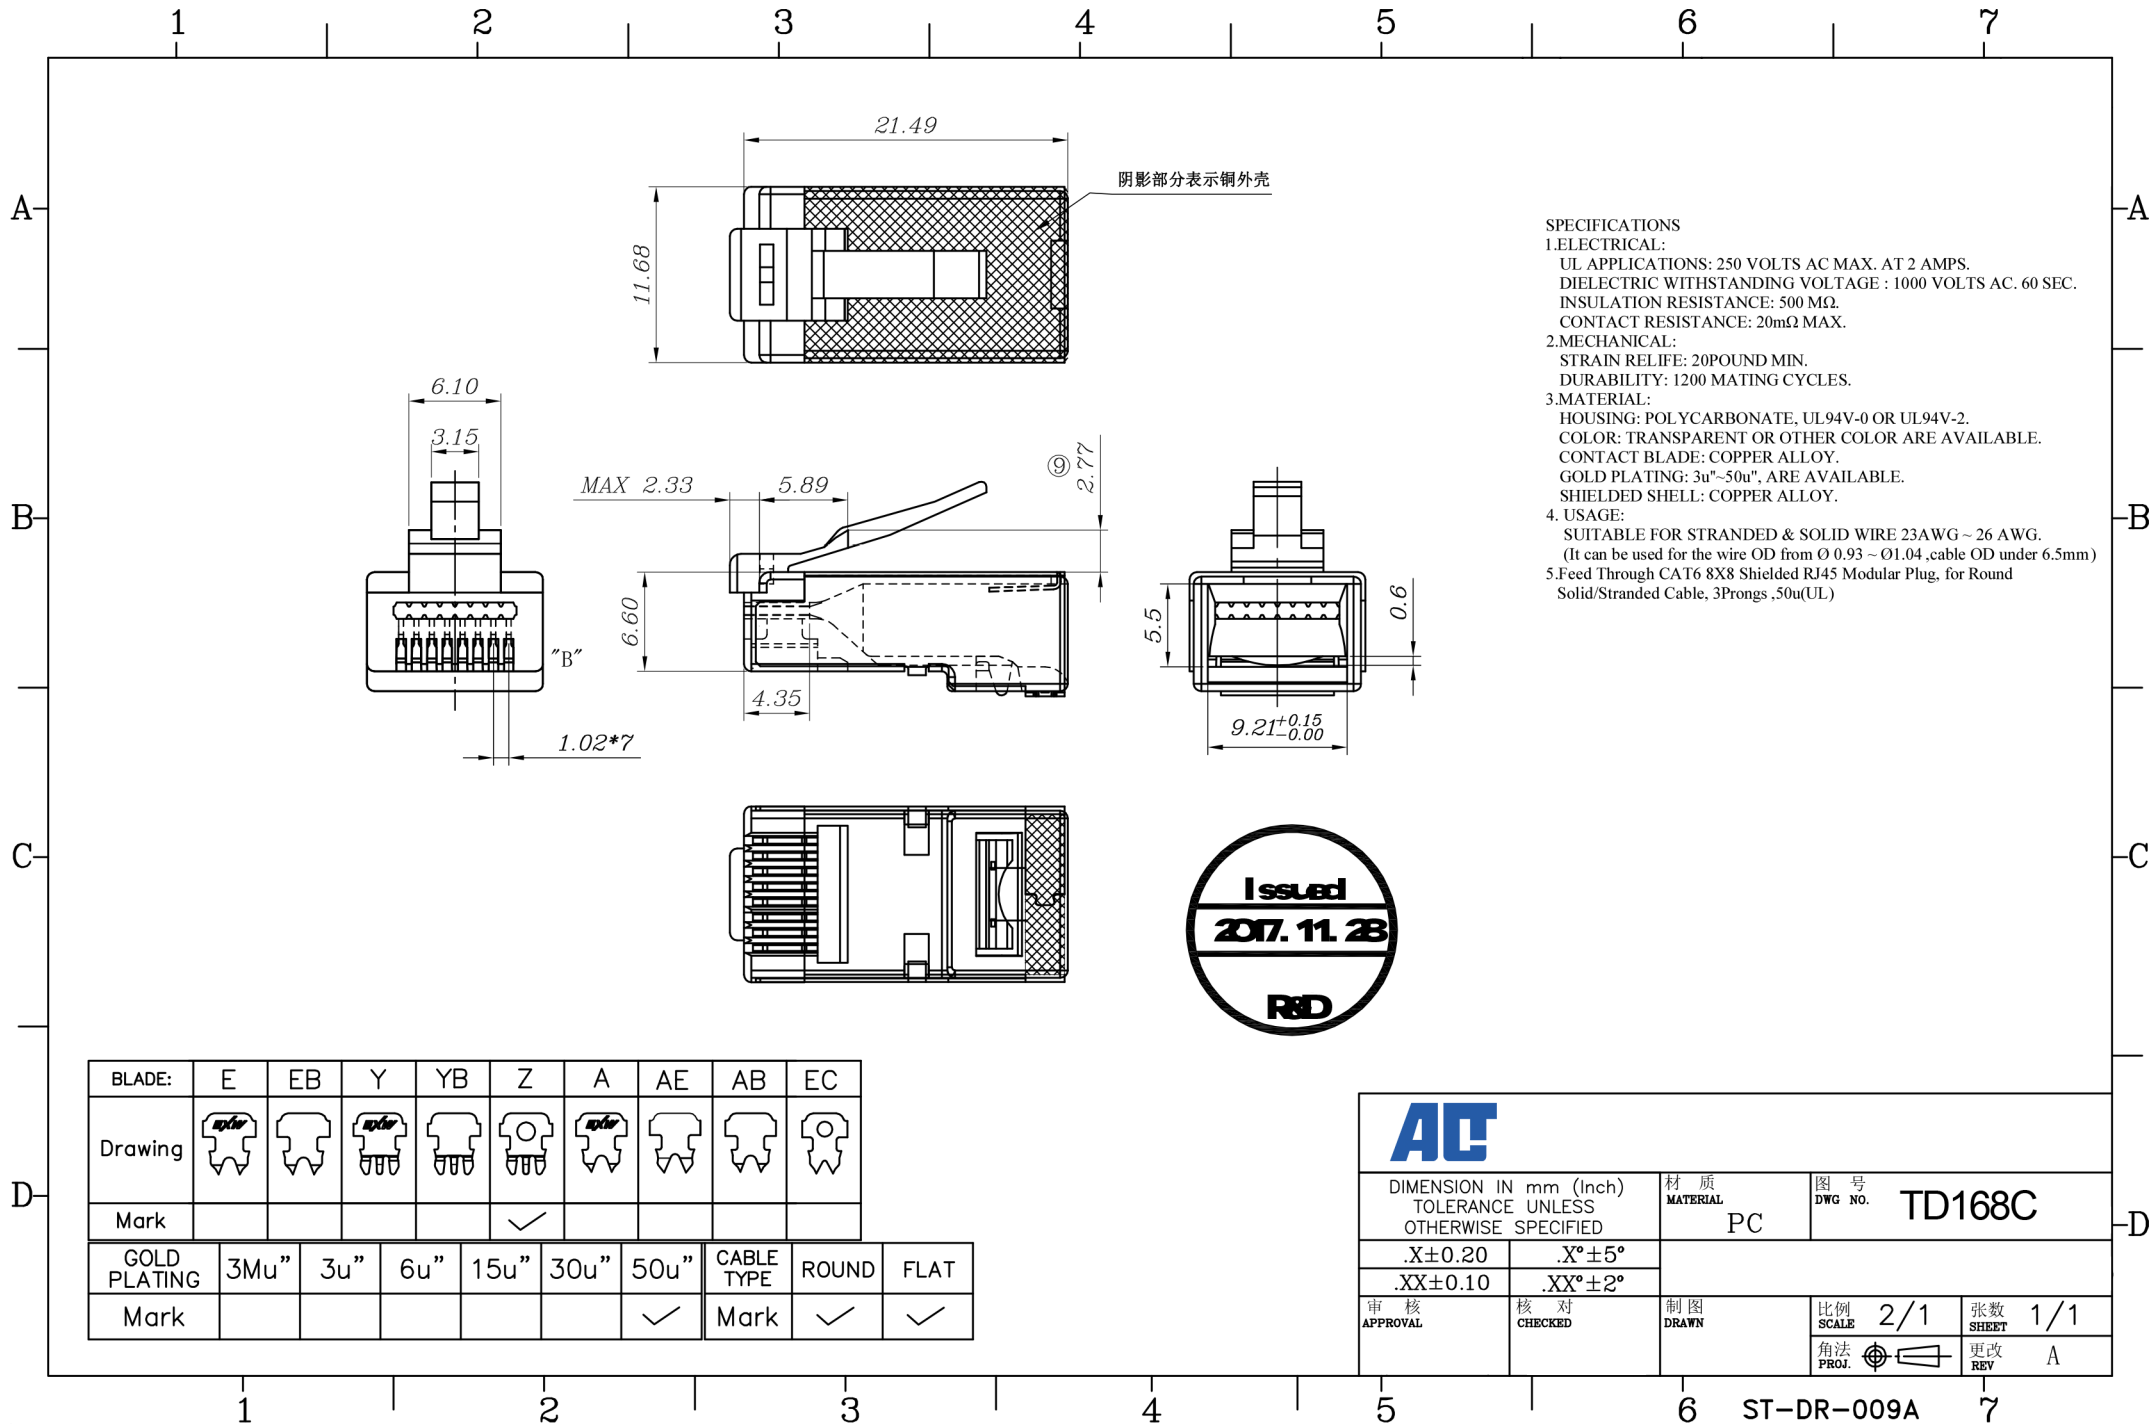

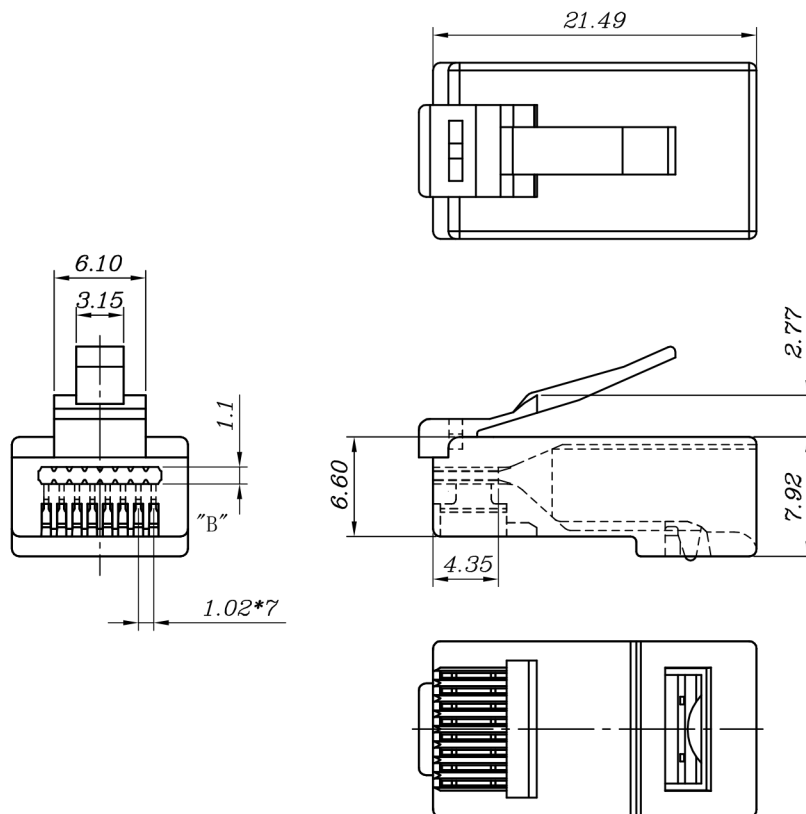

SPECIFICATIONS

1.ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 VOLTS AC. 60 SEC.
INSULATION RESISTANCE: 500 MΩ.
CONTACT RESISTANCE: 20mΩ MAX.

2.MECHANICAL:

STRAIN RELIEF: 20POUND MIN.
DURABILITY: 1200 MATING CYCLES.

3.MATERIAL:

HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: COPPER ALLOY.
GOLD PLATING: 3u"~50u", ARE AVAILABLE.

4. USAGE:

SUITABLE FOR STRANDED & SOLID WIRE 23AWG ~ 26 AWG.
(It can be used for the wire OD from Ø 0.93 ~ Ø1.04, cable OD under 6.5mm)
5.Feed Through CAT6 8X8 RJ45 Modular Plug, for Round Solid / Stranded Cable, 3Prongs .50u(UL)



BLADE:	E	EB	Y	YB	Z	A	AE	AB	EC
Drawing									
Mark					✓				
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"	CABLE TYPE	ROUND	FLAT
Mark						✓	Mark	✓	✓

AC		材 质 MATERIAL	图 号 DWG NO.
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		PC	TD168B
.X±0.20	.X°±5°		
.XX±0.10	.XX°±2°		
审 核 APPROVAL	核 对 CHECKED	制 图 DRAWN	比例 SCALE 2/1
			张数 SHEET 1/1
			更改 REV B

ST-DR-009A