



PIN OUT

USB A female

USB A female

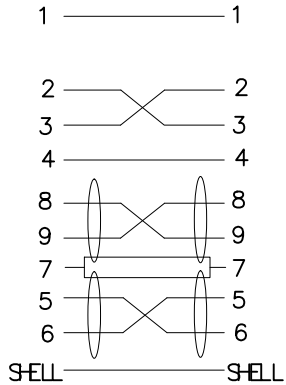

ACT Label Polybag 80x80mm

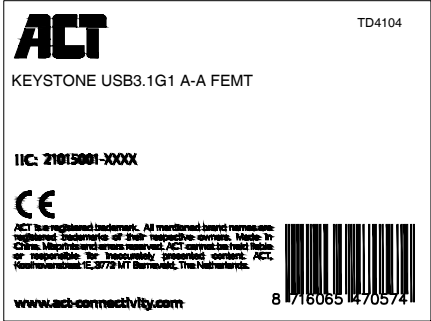

NOTES:

- 1.Electrical test:

(1).100% open short & miss wire test;

(2).Insulation resistance:DC 300V 10MΩ Min;

(3).Contactor resistance:3Ω Max;

Data Transfer: 5Gbps Voltages:5V Current:900mA

RoHS 3.0 and REACH Compliant

Packing:1PCS/PE Bag+Label

MATERIAL LIST:

②	SHELL	ABS/BLACK	1	
①	Connector	USB 3.0 A Female,Blue insulation The Pin Gold Plating,the Shell For Nickel plating	2	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW	21. May. 2021	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

"#":Matching DIM. "*":Important DIM. Others General DIM. GENERAL TOLERANCE OF DIMENSIONS X:XXX ±0.005 X:XX ±0.05 X:X ±0.1	DRAWING	21. May. 2021	Alvan	ACT	
	CHECK	21. May. 2021	Alvan		
	APPROVAL				
		DATE	NAME	ITEM NO. :TD4104	
	SCALE	1/1 (A4)	UNIT	mm	DES. :255312S
		DRAWING NO.		USB 3.1 GEN 1 A Female to A Female Keystone Type Adapter	
		DRAWING CLASSIFICATION		S	SHEET 1 OF 1