
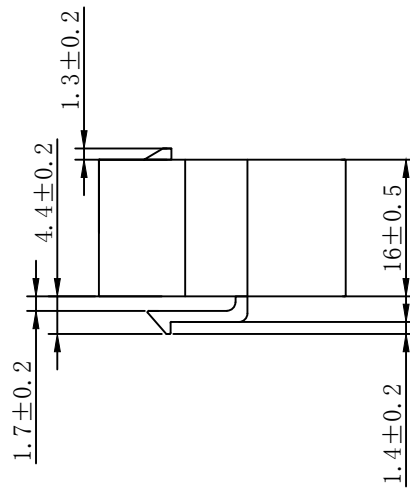



PIN OUT

A1	A1	B1	B1
A2	A2	B2	B2
A3	A3	B3	B3
A4	A4	B4	B4
A5	A5	B5	B5
A6	A6	B6	B6
A7	A7	B7	B7
A8	A8	B8	B8
A9	A9	B9	B9
A10	A10	B10	B10
A11	A11	B11	B11
A12	A12	B12	B12

NOTES:

- Electrical test:
 - 100% open short & miss wire test;
 - Insulation resistance:DC 300V 10MΩ Min;
 - Contact resistance:3Ω Max;
- Data Transfer: 10Gbps Voltages:5V Current:3A, RoHS 2.0 and REACH Compliant;
- Packing:1PCS/PE Bag+Label

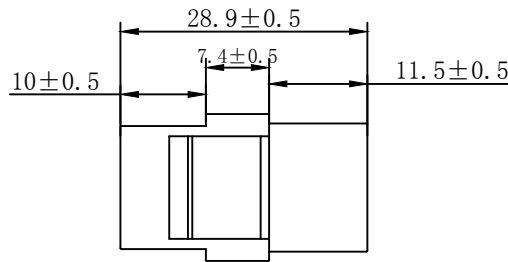

ACT Label Polybag 80x60mm



ITEM NO. :	ITEM NO. :	Color
76201Z	255332S	Black
	255332	White

MATERIAL LIST:

②	Housing	ABS	1	
①	Connector	USB C Female,Black insulation The Pin Gold Plating,the Shell For Nickel plating	2	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW	21. May. 2021	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

"#":Matching DIM. "*":Important DIM. Others General DIM. GENERAL TOLERANCE OF DIMENSIONS X:XXX ±0.005 X:XX ±0.05 X:X ±0.1	DRAWING	21. May. 2021	wbs	
	CHECK	21. May. 2021	Alvan	
	APPROVAL			
	SCALE	1/1 (A4)	UNIT mm	ITEM NO. : TD4105
				DES. :
	DRAWING NO.	USB 3.1 GEN2 Type C male to C Female Adapter keystone Type		
	DRAWING CLASSIFICATION	S	SHEET 1 OF 1	04