



KVMA switch to share Video and USB between multiple sources

ADDERVIEW 4PRO-VGA MS

Ultimate flexibility for sharing high-res screens and USB peripherals

PRODUCT IN BRIEF

The AV4PRO-VGA-MS is designed to enable four multihead computers to be controlled from a single high resolution KVM console using high definition analogue VGA video links. The switch makes use of Adder's True Emulation technology which enables USB HID devices to be continuously emulated to each computer. This unique technology enables instantaneous and reliable hot key switching whilst also supporting the extra keys and features of enhanced keyboards and mice. Furthermore, the ADDERView includes two independently switchable USB 2.0 channels and an audio channel, giving the user the flexibility to attach selected peripherals to different computers. Models are available supporting single, dual, triple or quad head VGA computers.

FEATURES

USB keyboard and mouse control

The ADDERView Pro MultiScreen features high resolution VGA video with extended DDC EDID profile. The extended DDC EDID profile ensures that the switched graphics card is always optimized to work with your screen. The VGA capabilities enable users to work at high resolutions on each head for resolution intensive applications such as media/graphic design or detailed medical imaging.

True Emulation USB 2.0 technology

The AV4PRO-VGA-MS belongs to the first KVMA range of switches to feature Adder's advanced True USB Emulation technology. Emulated USB provides an instantaneous and reliable switching action and makes keyboard hot key and mouse switching possible. Previous implementations have used generic emulations and consequently have only been able to support the most basic keyboard and mouse features. Adder's revolutionary True Emulation technology overcomes this frustrating limitation by emulating the true character of the connected devices to all the computers simultaneously. This means that you can now use the extra function keys, wheels, buttons and controls that are commonly found on modern keyboards and mice.

Independent simultaneous device selection

Flexibility is key to the ADDERView Pro. The switch enables you to use the KVMA console to work on one computer whilst your USB peripherals are connected to

other computers and your speakers are playing music from yet another. You can of course still switch all connected devices to any one of the connected computers as with any other KVM switch.

Channel selection options

The ADDERView Pro can be switched using selectable keyboard hot keys, 3 button mice or the front panel controls. Optionally, you can also use the RC4 remote switch to make your selection. These switching options allow you to rapidly reassign connected devices to any of the connected computers.


Broad USB 2.0 Hi Speed device support

A vast range of USB devices can be connected to the ADDERView Pro, from non standard human interface devices to printers and scanners. This gives great flexibility. For example, you could be scanning a set of documents onto one computer whilst working on another and printing from yet another, all at the same time. The USB 2.0 switching action has been carefully engineered to ensure maximum computer reliability when connecting and disconnecting USB devices.

Options port for control, synchronisation and upgrade

An 'Options' port enables the AV4PRO-VGA-MS to be remotely switched using simple ASCII codes. When the channel is switched, the same ASCII codes are echoed to the 'Options' port and so,

FEATURES continued...

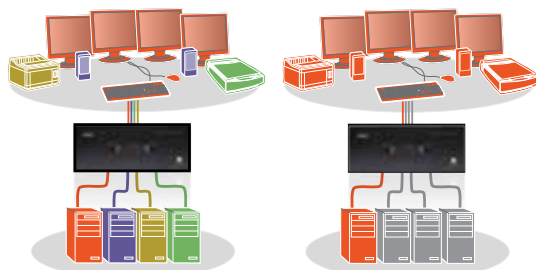

Independent simultaneous device selection

Switching all connected devices to a single computer

ADDERVIEW 4PRO-VGA MS

Ultimate flexibility for sharing high-res screens and USB peripherals

by linking 'Options' ports, two or more units can be switched in synchrony to switch more than 4 video heads. The port enables a 4 button switch unit (RC4) to be used with the ADDERView Pro. The same port can also be used to upgrade the firmware to guarantee that your hardware investment continues to deliver real value well into the future.

ABOUT ADDER

Adder is a leading developer and thought leader in connectivity solutions. Adder's advanced range of KVM switches, extenders and IP solutions enable the control of local, remote and global IT systems across the enterprise.

To find out more, visit:
<http://www.adder.com>

RELATED PRODUCTS

Adder offer a vast range of products to suit your needs. Other products you may be interested in include:

ADDERView 4PRO
AV4PRO-VGA



ADDERView 4PRO
AV4PRO-DVI



ADDERView 4PRO
MultiScreen
AV4PRO-DVI-QUAD



ADDERView 4PRO
DisplayPort
AV4PRO-DP



TECHNICAL SPECIFICATIONS

Hardware compatibility

All computers with USB interfaces

Software compatibility

Operates with all known software and operating systems including Windows (all), DOS, Linux, Unix, BSD, all Sun OS, all Mac OS, NetWare etc.

Computer connections at switch

USB 2.0 type B, Hi Res VGA (up to 4 per connection), 3.5mm stereo jack

Local KVM console connection:

- Video: VGA (Dual x 2, Triple x 3 or Quad x 4)
- Keyboard/Mouse: 2 x USB type A
- Switched USB: 2 x USB 2.0 type A
- USB True Emulation: Emulates keyboard and mouse on each port. Low speed HID USB 2.0 devices supported
- Audio: 3.5mm stereo jack
- Other Connections: Options (flash upgrade, sync with other AV4PRO-VGA-MS and RS232 triggered power switches): Modular 10P10C

Physical design

2.5U high metal case
260mm (w), 150mm (d), 100mm (h)

Power connection

2.5mm DC jack (power adapter included), 100-240VAC 50/60Hz input to power adapter, 5VDC 2A output from power adapter

Operating temperature

0 to 40°C / 32 to 104°F

Approvals

CE, FCC

ORDERING INFORMATION

ADDERView PRO 4 port version:

AV4PRO-VGA-DUAL-XX: Dual head

AV4PRO-VGA-TRIPLE-XX: Triple head

AV4PRO-VGA-QUAD-XX: Quad head

XX	= Mains Lead Country Code:
UK	= United Kingdom
US	= United States
EURO	= Europe
AUS	= Australia

ADDITIONAL ACCESSORIES

RMK5PROMS: Rack Mount Kit

VSC18: 2m VGA analog video cable

VSC18: 2m USB cable (type A to B)

VSC22: 2m Audio cable

VSC40: Flash upgrade adapter plus standard 3m patch lead

RC4-8P8C: RC4 remote control plus standard 3m patch lead



© Copyright 2012 Adder Technology Ltd. All brand names and trademarks are the property of their respective owners. LMav4pro_vga_ms_v3.indd

ADDER TECHNOLOGY

Saxon Way, Bar Hill,
Cambridge, CB23 8SL UK
Tel: +44 (0)1954 780044 Fax: +44 (0)1954 780081
email: sales@adder.com www.adder.com

ADDER CORPORATION

350R Merrimac St.
Newburyport, MA 01950 USA
Tel: +1 888 932 3337 Fax: +1 888 275 1117
email: usasales@adder.com www.adder.com

ADDER TECHNOLOGY ASIA PACIFIC

8 Burn Road
#04-10 Trivex, Singapore 369977
Tel: +65 6288 5767 Fax: +65 6284 1150
email: asiasales@adder.com www.adder.com



ADDER®