

SST™ Central Tube Steel Armour Outdoor Cable

12F E9 SMF-28e+® ITU G652.D CT 3.0

CORNING

Corning central tube cables with corrugated steel armouring are designed for outdoor use for campus, city and intercity backbones in duct and direct burial installations.

The central tube cable construction, by isolating the fibres from installations and environmental rigors, provides stable and highly reliable transmission parameters. The fibres are colour coded for quick and easy identification.

The cable construction, based on a central buffer tube, is very compact, light, flexible and ideal for connections requiring a moderate fibre count.

These cables are designed for installation in conduits, ducts and for direct burial.

Features and Benefits

Waterblocking technology

Outside Plant (OSP) applications

UV and microbe resistant

Can be directly buried or installed in ducts

Corrugated steel armouring


Rodent, mechanical protection and direct buried applications

Small diameter and bend radius

Easy installation in space-constrained areas

Fibres colour coding to Telcordia-Bellcore

Easy identification of the individual fibres

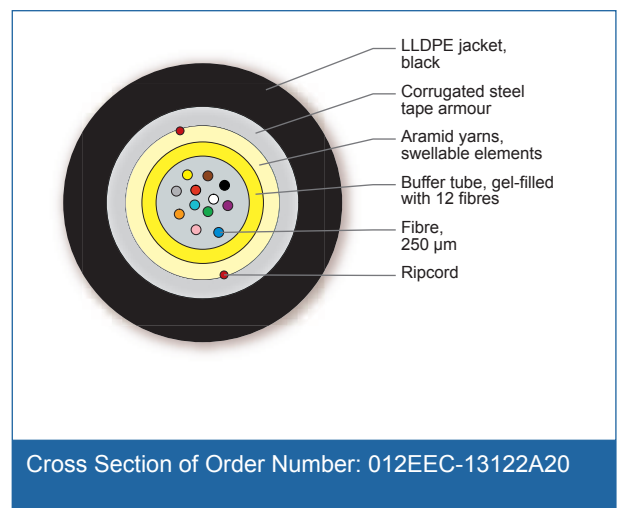

Standards

Waterblocking IEC 60794-1-2 F5

Specifications

General Specifications	
Environment	Outdoor
Application	Direct Buried, Duct
Cable type	Central Tube
Product type	Corrugated steel armour

SST™ Central Tube Steel Armour Outdoor Cable

12F E9 SMF-28e+® ITU G652.D CT 3.0

CORNING

General Specifications

Fibre Category	SM (OS2)
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	A-DQ(ZN)(SR)2Y
Previous part number	FWCT01-S0012-U003
Previous coding following DIN VDE 0888-3	A-DQ(ZN)(SR)2Y

Temperature Range

Installation and assembly	-5 °C to 50 °C
Operation	-20 °C to 60 °C
Storage	-25 °C to 70 °C

Cable Design

Fibre Count	12
Fibre colouring	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Violet, Pink, Turquoise
Buffer tube diameter	3 mm
Buffer tube colour	Yellow
Number of ripcords	2
Tensile Strength Elements and/or Armouring - Layer 1	Corrugated steel tape armour with dielectric strength elements (aramid yarns) and swellable elements
Outer jacket material	Linear Low Density Polyethylene (LLDPE)
Outer jacket colour	Black
Outer jacket nominal thickness	1.5 mm
Cable marking	Metre - Handset - Sine - CORNING - Year - SST (TM) A-DQ(ZN)(SR)2Y 12F E9 CT 3.0

Mechanical Characteristics Cable

Nominal Outer Diameter	7.5 mm
Weight	60 kg/km
Min. Bend Radius Installation	150 mm
Min. Bend Radius Operation	110 mm
Max. tensile strength for installation	1000 N
Crush resistance (reversible)	2000 N/10 cm

SST™ Central Tube Steel Armour Outdoor Cable

12F E9 SMF-28e+® ITU G652.D CT 3.0

CORNING

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Ordering Information

Part Number	012EEC-13122A20
Product Description	SST™ Central Tube Steel Armour Outdoor Cable 12F E9 SMF-28e+® ITU G652.D CT 3.0
EAN Code	4042673580775

Shipping Information

Maximum delivery length	6,000 m
-------------------------	---------



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2017 Corning Optical Communications. All rights reserved.