ZYXEL





ZyWALL 1100/310/110 and USG20(W)-VPN

VPN Firewall

Networking brings convenience and efficiency to business environments; however it introduces significant security and safety concerns at the same time. Today, businesses or branch offices really need a complete yet affordable solution that not only bridges communications between two or more remote sites, but also connects multiple VPNs and ensures data security to prevent the network from threats.

Benefits

Safer, more reliable VPN connections

Faster processors today have vastly boosted the capabilities of attackers to decrypt VPN tunnels. Legacy VPN cryptographic algorithms like Message Digest 5 (MD5) and Secure Hash Algorithm 1 (SHA-1) are no longer sufficient to guarantee secure outbound communications. With supports to the more advanced Secure Hash Algorithm 2 (SHA-2), the VPN Firewall provides the safest VPN connections in its class to ensure maximum security for business communications.

The complete range of Zyxel VPN Firewalls deliver reliable, non-stop VPN services with dual-WAN failover and fallback support. With two WAN connections—one primary and one for redundancy—the Zyxel VPN Firewall automatically switches to the backup connection should the primary link fail, and automatically switches back to the primary connection once it is back online.



Robust hybrid VPN (IPSec/ SSL/L2TP over IPSec)



High-performance SPI Firewall



More secure VPN connections with SHA-2 cryptographic



Auto-provisioned client-tosite IPsec setup with Easy VPN



Cloud helper provides the friendly firmware upgrade to ensure its authenticity and reliability.



Device HA Pro dedicated heartbeat port ensures smart handover.



Hotspot management for authentication ,access control and billing.





To support dynamic, mobile business operations in today's BYOD (bring your own device) business environments, the VPN Firewalls offer unlimited business mobility with Layer-2 Tunneling Protocol (L2TP) VPN for mobile devices. The VPN Firewall supports L2TP/IPSec VPN on a wide variety of mobile Internet devices running the iOS, Android and Windows mobile platforms.

Zero-configuration remote access

Virtual private networks provide businesses a secure and convenient way of sharing company resources with partners, customers, or employees on business trips. Yet typical VPN solutions are hard for non-technical users to configure, which greatly reduces their usability and convenience. The Zyxel VPN Firewalls feature Easy VPN to provide auto-provisioned client-to-site IPsec VPN setup. A wizard is available with the Zyxel IPsec VPN client-software that automatically retrieves the VPN configuration file from the remote Zyxel VPN Firewall and completes the IPsec VPN setup in 3 simple steps. Zyxel's Easy VPN lowers administration effort and allows partner, customers, or traveling employees to access company servers, email, or data centers easily and securely.

Best TCO for access expansion

People expect network access regardless of time or location. As a result, hotspots are in demand in an ever-expanding assortment of locations. The Zyxel VPN firewalls integrated with Zyxel AP Controller technology enables users from a centralized user interface. In addition, Zyxel Hotspot Management delivers a unified solution for business networks with user-friendly tools like Billing System, Walled Garden, Multiple Authentication, 3rd Party Social Login and User Agreement. With ZyWALL series businesses can now deploy or expand a managed Wi-Fi network with minimal effort.

Swift and secure firmware upgrades

Locating firmware updates — not to mention identifying correct versions for your device and managing their installation — can be a complex and confusing ordeal. The Zyxel VPN Firewall solves this with its new Cloud Helper service. Cloud Helper provides a simple step to look for up-to-date firmware information. New firmware is immediately made available upon release from our official database to ensure its authenticity and reliability.

Simplified management procedure

Managing complex configuration settings can be confusing and time-consuming. Zyxel USG 20-VPN and USG20W-VPN provides an "easy mode" setting in the GUI for entry-level and SOHO users. Easy mode provides an icon-based feature set and attractive dashboard to simplify management and monitoring of the device. Application and function settings also have integrated wizards for user-friendly setup. Zyxel USG 20-VPN and USG20W-VPN easy mode helps entry-level users and SOHO users effortlessly take advantage of high-speed and secure networking.


Zyxel One Network experience

Aiming for relieving our customers from repetitive operations of deploying and managing a network, Zyxel One Network is designed to simplify the configuration, management, and troubleshooting, allowing our customers to focus on the business priorities. Zyxel One Network presents an easy-to-use tool, Zyxel One Network Utility (ZON Utility), to realize speed network setup. Zyxel Smart Connect allows Zyxel networking equipment to be aware and recognize each other and further facilitating the network maintenance via one-click remote functions such as factory reset or power cycling. Zyxel One Network redefines the network integration across multiple networking products from switch to Wi-Fi AP and to Gateway.

Stay secure and Up-to-Date with OneSecurity

Zyxel provides frequent and timely updates in response to the latest security threats and advisories through OneSecurity — our free online service portal. OneSecurity offers informative network security resources and the know-how to assist businesses and IT administrators in keeping their network operations safe in the digital age. Information and resources can be found with one click via the GUI of Zyxel USG Extreme and ZyWALL series products. IT staff can quickly and easily catch up on the latest threats, and then proceed to walkthroughs and troubleshooting protocols with the help of easy-to-follow FAQs — all provided to help users secure their networks and simplify management of our UTM products.

VPN Firewall Quick Finder

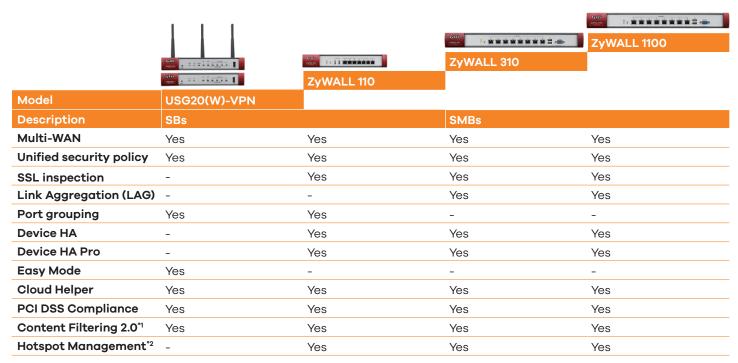

^{*1:} SSL Inspection must be enabled for Content Filtering 2.0 Safe Search to function properly.

License Features







empowers IT professionals to customize the system to meet their individual needs.









-Virus Anti-Spam

Intrusion Detection Application Patrol

Hotspot

The Zyxel VPN Firewall Series provides a complete feature set to perfectly fit different business requirements as well as to enable the maximum performance and security with an all-in-one appliance. Comprehensive network modularity also

Notes:

- 1. USG20(W)-VPN provides Anti-Spam & Content Filtering 2.0 only
- 2. Hotspot Management supports for ZyWALL 310 and ZyWALL 1100 in firmware ZLD4.20 or later; and for ZyWALL 110 in firmware ZLD4.25 or later.

^{*2:} Hotspot Management supports for ZyWALL 310 and ZyWALL 1100 in firmware ZLD4.20 or later; and for ZyWALL 110 in firmware ZLD4.25 or later.


Key Applications

VPN application

- Branch offices, partners and home users can deploy Zyxel USGs/ZyWALLs for site-to-site IPSec VPN connections
- Branch offices/In-house staff can additionally deploy IPSec VPN HA (load balancing and failover) for always online VPN connectivity
- Remote users can securely access company resources with their computers or smartphones via SSL, IPSec and L2TP over IPSec VPN
- The headquarter USG/ZyWALL can also establish an IPSec VPN connection with Microsoft Azure for secured access to a variety of cloud-based applications

Hotspot Management

- High speed internet access
- Tier of service
- Log record for regulatory compliance
- Premium security control
- Various Network access control (free or paid access, social login)
- *Hotspot Management supports for ZyWALL 310 and ZyWALL 1100 in firmware ZLD4.20 or later; and for ZyWALL 110 in firmware ZLD4.25 or later.

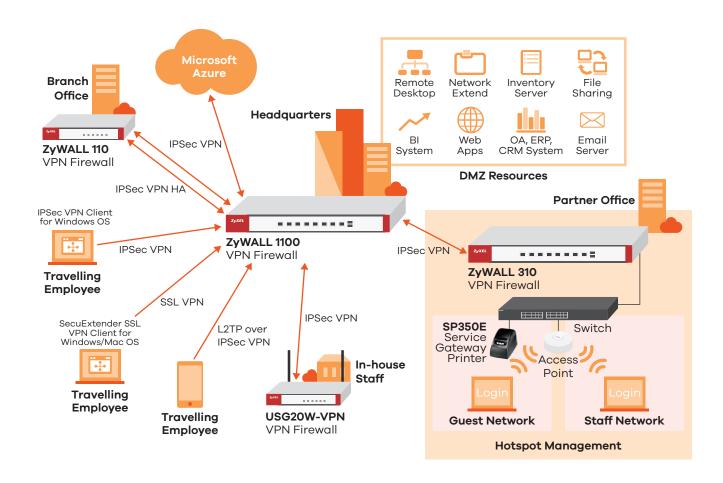

Specifications

Model	ZyWALL 1100	ZyWALL 310	ZyWALL 110	USG20-VPN	USG20W-VPN
Product photo					
		· 直直直接直接直接 ·	TABLE TO BE STATE OF THE STATE	om . sa llaga I	total
Hardware Specifications					
10/100/1000 Mbps RJ-45 ports	8 (configurable)	8 (configurable)	2 x WAN, 1 x OPT, 4 x LAN/DMZ	1 x WAN, 1 x SFP, 4 x LAN/DMZ	1 x WAN, 1 x SFP, 4 x LAN/DMZ
USB ports	2	2	2	1	1
Console port	Yes (DB9)	Yes (DB9)	Yes (DB9)	Yes (RJ-45)	Yes (RJ-45)
Rack-mountable	Yes	Yes	Yes	-	-
Fanless	-	-	-	Yes	Yes
System Capacity & Performanc	e*1				
SPI firewall throughput (Mbps) ²	6,000	5,000	1,600	350	350
VPN throughput (Mbps)*3	800	650	400	90	90
Concurrent Devices (default/max.)	800/1500	500/800	200/300	64	64
Max. TCP concurrent sessions*4	500,000	200,000	60,000	20,000	20,000
Max. concurrent IPsec VPN tunnels*5	1,000	300	100	10	10
Concurrent SSL VPN user no. (default/max.)	250/500	50/150	25/150	5/15	5/15
Customizable zones	Yes	Yes	Yes	Yes	Yes
IPv6 support	Yes	Yes	Yes	Yes	Yes
VLAN interface	128	64	16	8	8
WLAN Management					
AP controller (APC) Support	Yes	Yes	Yes	-	-
Managed AP number (default/max.)	2/66	2/34	2/34	-	-
Key Software Features					
Firewall	Yes	Yes	Yes	Yes	Yes
Virtual private network (VPN)	Yes (IPSec, SSL, L2TP over IPSec)		Yes (IPSec, SSL, L2TP over IPSec)	Yes (IPSec, SSL, L2TP over IPSec)	Yes (IPSec, SSL, L2TP over IPSec)
Bandwidth Management	Yes	Yes	Yes	Yes	Yes
Logging and Monitoring	Yes	Yes	Yes	Yes	Yes
SSL (HTTPS) inspection	Yes	Yes	Yes	-	-
Unified Security Policy	Yes	Yes	Yes	Yes	Yes
EZ Mode	-	-	-	Yes	Yes
Cloud Helper	Yes	Yes	Yes	Yes	Yes
Device HA	Yes	Yes	Yes	-	-
Licenses Features (E-iCard requ	uired)				
Anti-Virus (AV)	Yes	Yes	Yes	_	-
Intrusion detection and prevention (IDP) & Application Patrol	Yes	Yes	Yes	-	-
Anti-Spam	Yes	Yes	Yes	Yes	Yes
Content Filtering 2.0 (CF2.0)*6	Yes	Yes	Yes	Yes	Yes
Device HA Pro	Yes	Yes	Yes	-	-
Hostpot Management ^{*7}	Yes	Yes	Yes	-	-

Model		ZyWALL 1100	ZyWALL 310	ZyWALL 110	USG20-VPN	USG20W-VPN
Power Requi	rements					
Power input		100 - 240 V AC,	100 - 240 V AC,	12 V DC, 3.33 A	12 V DC, 2.0 A	12 V DC, 2.0 A
		50/60 Hz, 1.3 A	50/60 Hz, 1.3 A	max.	max.	max.
		max.	max.			-
Max. power ((watt)	consumption	58.5	58.5	37.0	12.00	18.0
Heat dissipa	tion (BTU/hr)	199.61	199.61	126.25	40.92	61.38
Physical Spe	cifications					
Item	Dimensions (WxDxH)(mm/in.)	430 x 250 x 44/ 16.93 x 9.84 x 1.73	430 x 250 x 44/ 16.93 x 9.84 x 1.73	300 x 178 x 44/ 11.81 x 7 x 1.73	216 x 143 x 33 / 8.50 x 5.63 x 1.30	216 x 143 x 33 / 8.50 x 5.63 x 1.30
	Weight (kg/lb.)	3.3/7.28	3.3/7.28	2/4.41	1.04/2.29	1.14/2.51 (antenna included)
Packing	Dimensions (WxDxH)(mm/in.)	519 x 392 x 163/ 20.43 x 15.43 x 6.42	519 x 392 x 163/ 20.43 x 15.43 x 6.42	245 x 152 x 351/ 9.65 x 5.98 x 13.82	276 x 185 x 98/ 10.87 x 7.28 x 3.86	276 x 185 x 98/ 10.87 x 7.28 x 3.86
	Weight (kg/lb.)	4.74/10.45	4.74/10.45	2.83/6.24	1.41/3.11	1.50/3.31
Included acc	essories	Power cordRack mounting kit	 Power cord Rack mounting kit 	•	 Power adapter RJ45 -RS232 cable for console connection 	 Power adapter RJ45 -RS232 cable for console connection Antenna
Environment	al Specifications					
Operating	Temperature	0°C to 40°C/ 32°F to 104°F	0°C to 40°C/ 32°F to 104°F			
	Humidify	10% to 90% (non- condensing)	10% to 90% (non- condensing)	10% to 90% (non- condensing)	10% to 90% (non- condensing)	10% to 90% (non- condensing)
Storage	Temperature	-30°C to 70°C/ -22°F to 158°F	-30°C to 70°C/ -22°F to 158°F			
	Humidify	10% to 90% (non- condensing)	10% to 90% (non- condensing)	10% to 90% (non- condensing)	10% to 90% (non- condensing)	10% to 90% (non- condensing)
MTBF (hr)		560,811.5	560,811.5	787,109.3	44,000.00	44,000.00
Certification	ıs					
EMC		FCC Part 15 (Class A), CE EMC(Class A), C-Tick (Class A), BSMI	FCC Part 15 (Class A), CE EMC(Class A), C-Tick (Class A), BSMI	FCC Part 15 (Class A), CE EMC(Class A), C-Tick (Class A), BSMI	FCC Part 15 (Class B), IC, CE EMC(Class B), RCM, BSMI	FCC Part 15 (Class B), IC, CE EMC(Class B), RCM, BSMI
Safety		LVD (EN60950- 1), BSMI	LVD (EN60950- 1), BSMI	LVD (EN60950- 1), BSMI	BSMI, UL	BSMI, UL

^{*}This matrix with firmware ZLD 4.20 or later.

^{*1:} Actual performance may vary depending on network conditions and activated applications.
*2: Maximum throughput based on RFC 2544 (1,518-byte UDP packets).

^{*3:} VPN throughput measured based on RFC 2544 (1,424-byte UDP packets).

^{*4:} Maximum sessions measured using the industry standard IXIA IxLoad testing tool.

^{*5:} Including Gateway-to-Gateway and Client-to-Gateway.

^{*6:} SafeSearch function in CF2.0 need to enable SSL Inspection firstly.

^{*7:} Hotspot Management supports for ZyWALL 310 and ZyWALL 1100 in firmware ZLD4.20 or later; and for ZyWALL 110 in firmware ZLD4.25 or later.

Wireless Specifications

Model		USG20W-VPN		
Standard compliance		802.11 a/b/g/n/ac		
Wireless frequency		2.4 GHz / 5 GHz		
Radio		1		
SSID number		8		
Maximum transmit	US (FCC) 2.4 GHz	25dBm, 3 antennas		
power	US (FCC) 5 GHz	25dBm, 3 antennas		
EU (ETSI) 2.4 GHz		20dBm (EIRP), 3antennas		
EU (ETSI) 5 GHz		20dBm (EIRP), 3antennas		
No. of antenno	a	3 Detachable antenna		
Antenna gain		2dBi @2.4GHz, 3dBi @5GHz		
Data rate		802.11n Up to 450Mbps, 820.11ac Up to 1300Mbps		
Receive 2.4 GHz 1		11 Mbps ≤ -87 dBm, 54 Mbps ≤ -74 dBm,HT20, MCS15 ≤ -71 dBm HT40, MCS15 ≤ -67 dBm		
sensitivity 5 GHz 54 Mbps ≤ -74 dBmHT20, MCS23 ≤ -71 dBmHT40, MCS23 ≤ -68 dBmV dBmVHT40, MCS9 ≤ -62 dBmVHT80, MCS9 ≤ -59dBm		54 Mbps ≤ -74 dBmHT20, MCS23 ≤ -71 dBmHT40, MCS23 ≤ -68 dBmVHT20, MCS8 ≤ -66 dBmVHT40, MCS9 ≤ -62 dBmVHT80, MCS9 ≤ -59dBm		

Features Set

Software Features

Firewall

- ICSA-certified firewall
- Routing and transparent (bridge) modes
- Stateful packet inspection
- User-aware policy enforcement
- SIP/H.323 NAT traversal
- ALG support for customized ports
- Protocol anomaly detection and protection
- Traffic anomaly detection and protection
- Flooding detection and protection
- DoS/DDoS protection

IPv6 Support

- Dual stack
- IPv4 tunneling (6rd and 6to4 transition tunnel)
- IPv6 addressing
- DNS
- DHCPv6
- Bridge
- VLAN
- PPPoE
- Static routing
- Policy routing
- Session control
- Firewall and ADP
- IPSec VPN
- IDP

- Application Patrol
- Content Filtering 2.0
- Anti-Virus, Anti-Malware
- Anti-Spam

IPSec VPN

- ICSA-certified IPSec VPN
- Encryption: AES (256-bit), 3DES and DES
- Authentication: SHA-2 (512-bit), SHA-1 and MD5
- Support route-based VPN Tunnel Interface (VTI)
- Key management: manual key, IKEv1 and IKEv2 with EAP
- Perfect forward secrecy (DH groups) support 1, 2, 5, 14
- IPSec NAT traversal
- Dead peer detection and relay detection
- PKI (X.509) certificate support
- VPN concentrator
- Simple wizard support
- VPN auto-reconnection
- VPN High Availability (HA): loadbalancing and failover
- L2TP over IPSec
- GRE and GRE over IPSec
- NAT over IPSec
- Zyxel VPN client provisioning

SSL VPN

- Supports Windows and Mac OS X
- Supports full tunnel mode
- Supports 2-step authentication
- HTTP, FTP, SMTP, POP3 and IMAP4 protocol support
- Automatic signature updates
- No file size limitation
- Customizable user portal

Networking

- Routing mode, bridge mode and hybrid mode
- Ethernet and PPPoE
- NAT and PAT
- VLAN tagging (802.1Q)
- Virtual interface (alias interface)
- Policy-based routing (user-aware)
- Policy-based NAT (SNAT)
- Dynamic routing (RIPv1/v2 and OSPF)
- DHCP client/server/relay
- Dynamic DNS support
- WAN trunk for more than 2 ports
- Per host session limit
- Guaranteed bandwidth
- Maximum bandwidth
- Priority-bandwidth utilization
- Bandwidth limit per user
- Bandwidth limit per IP
- GRE

WLAN Management

(ZyWALL Series support only)

- Support AP controller version 1.97
- Wireless L2 isolation
- Supports auto AP FW update
- Scheduled Wi-Fi service
- Dynamic Channel Selection (DCS)
- Client steering for 5GHz priority and sticky client prevention
- Auto healing provides a stable and reliable coverage
- IEEE 802.1x authentication
- Captive portal Web authentication
- Customizable captive portal page
- RADIUS authentication
- Wi-Fi Multimedia (WMM) wireless QoS
- CAPWAP discovery protocol
- Multiple SSID with VLAN

Authentication

- Local user database
- Built-in user database
- Microsoft Windows Active Directory integration
- External LDAP/RADIUS user database
- XAUTH, IKEv2 with EAP VPN authentication
- Web-based authentication
- Forced user authentication (transparent authentication)
- IP-MAC address binding
- SSO (Single Sign-On) support

Logging/Monitoring

- Comprehensive local logging
- Syslog (send to up to 4 servers)
- E-mail alert (send to up to 2 servers)
- Real-Time traffic monitoring

- System status monitoring
- Built-in daily report
- Advanced reporting (Vantage Report)

System Management

- Role-based administration
- Multiple administrator logins
- Supports Cloud Helper
- Multi-lingual Web GUI (HTTPS and HTTP)
- Command line interface (console, Web console, SSH and telnet)
- SNMP v1, v2c, v3
- System configuration rollback
- Firmware upgrade via FTP, FTP-TLS and Web GUI
- Dual firmware images
- Cloud CNM SecuManager

Optional Security Services

- Kaspersky Anti-Virus
- Application Patrol & IDP
- Content Filtering 2.0
- Anti-Spam

Zyxel One Network

- ZON Utility
 - IP configuration
 - Web GUI access
 - Firmware upgrade
 - Password configuration
- Smart Connect
 - Location and System Name update
 - Discover neighboring devices
 - •One-click remote management access to the neihboring Zyxel devices

Hotspot Management

- ZyWALL 110*, ZyWALL 310, and Zy-WALL 1100 support only
- * Firmware ZLD4.25 or later
- Integrated account generator, Webbased authentication portal and billing system
- Supports external RADIUS servers
- Per account bandwidth management
- User agreement login
- SP350E Service Gateway Printer enables oneclick account and billing generation
- Built-in billing system
 - •Time-to-finish accounting mode
 - Accumulation accounting mode
- Supports PayPal online payment
- Marketing tool
 - Advertisement link
 - -Walled garden
 - •Portal page

Device High Availability Pro (HA Pro)

- ZyWALL Series support only
- Device failure detection and notification
- Supports ICMP and TCP ping check
- Link monitoring
- Configuration auto-sync
- Dedicated Heartbeat Link
- Smart handover
- NAT/Firewall/VPN Sessions synchronization

Licenses

Product	SSL VPN Tunnels	SecuExtender SSL VPN Client⁴	IPSec VPN Client
ZyWALL 1100 ZyWALL 310 ZyWALL 110	Add 5/10/50 tunnels	For 1/5/10 client(s)	For 1/5/10/50 client(s)
USG20-VPN USG20W-VPN	Add 5/10 tunnels	For 1/5/10 client(s)	For 1/5/10/50 client(s)

^{*1:} Support OS: MAC OS 10.7 or later

Security

Product	Kaspersky Anti-Virus	Application Patrol & IDP	Content Filtering 2.0	Anti-Spam
ZyWALL 1100 ZyWALL 310 ZyWALL 110	1/2 year(s)	1/2 year(s)	1/2 year(s)	1/2 year(s)
USG20-VPN USG20W-VPN	-	-	1/2 year(s)	1/2 year(s)

Connectivity & Industrial

Product	Concurrent Device Upgrade ¹¹	Hotspot Management*2	Managed APs	Device HA Pro⁵¹	Vantage Report
ZyWALL 1100	100/300 nodes	1 year/One-Time	Add 4/8 APs	One-Time	For 1/5/25/100 device(s)
ZyWALL 310	100/300 nodes	1 year/One-Time	Add 4/8 APs	One-Time	For 1/5/25/100 device(s)
ZyWALL 110	100 nodes	1 year / One-Time	Add 4/8 APs	One-Time	For 1/5/25/100 device(s)
USG20-VPN	-	-	-	-	For 1/5/25/100 device(s)
USG20W-VPN	-	-	-	-	For 1/5/25/100 device(s)

^{*1:} With firmware ZLD 4.20 or later

Notes:

1. Licenses can be easily activated, renewed and managed at myZyxel.

2. License bundles may vary according to region. Please contact your local sales representative for more information.

3. ZyWALL Series provides all security services with 30-day trial.

4. USG20(W)-VPN provide Content Filtering 2.0 and Anti-Spam services with 30-day trial.

^{*2:} Hotspot Management supports for ZyWALL 310 and ZyWALL 1100 in firmware ZLD4.20 or later; and for ZyWALL 110 in firmware ZLD4.25 or later.

Access Point Compatibility List

Series	NWA5120 Series	NWA5000 Series	NWA3000-N Series	WAC6500 Series
	Unified Access Point	Managed Access Point	Unified Pro Access Point	Unified Pro Access Point
Models	NWA5121-NI NWA5121-N NWA5123-NI NWA5301-NJ NWA5123-AC	NWA5160N NWA5560-N NWA5550-N	NWA3160-N NWA3560-N NWA3550-N	WAC6503D-S WAC6502D-S WAC6502D-E WAC6553D-E WAC6103D-I
Functions				
Central management	Yes	Yes	Yes	Yes
Auto provisioning	Yes	Yes	Yes	Yes
Data forwarding	Local bridge	Local bridge	Local bridge	Local bridge

Accessories

VPN Client Software

Item	Description	Supported OS
IPSec VPN Client	IPSec VPN client software for the ZyWALL	• Windows XP (32-bit)
	and USG Series with Easy VPN for zero-	 Windows Server 2003 (32-bit)
	configuration remote access	 Windows Server 2008 (32/64-bit)
		• Windows Vista (32/64-bit)
		• Windows 7 (32/64-bit)
		• Windows 8 (32/64-bit)
		• Windows 10 (32/64-bit)
SecuExtender—	Secured VPN connection between device and	• Windows XP
SSL VPN Client	USG/ZyWALL Series with lite setup for Windows	• Windows 7 (32/64-bit)
	and MAC OS	• Windows 8/8.1 (32/64-bit)
		• Windows 10 (32/64-bit)
		MAC OS 10.7 or later

Notes:

Service Gateway Printer

Model	Feature	Supported model
SP350E	 Buttons: 3 Paper roll width: 58 (+0/-1) mm Interface: 10/100 Mbps RJ-45 port Power input: 12 V DC, 5 A max. Item dimensions (WxDxH): 176 x 111 x 114 mm (6.93" x 4.37" x 4.49") 	ZyWALL1100 ZyWALL310 ZyWALL 110*
	• Item weight: 0.8 kg (1.76 lb.)	

^{*} With firmware ZLD4.25 or later

^{1.} A 30-day trial version of IPSec VPN client and SSL VPN client for MAC OS can be downloaded from official Zyxel website. To continue using the application, please contact your regional sales representatives and purchase a commercial license for the application.

^{2.} SSL VPN client for Windows OS can be downloaded from official Zyxel website. It does not require a license key to activate the application.

Note









